



# EVoline®



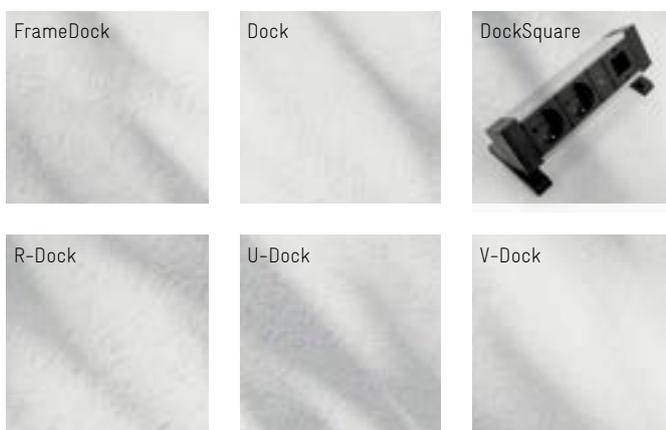

Circle80 Family	8
Backflip	20
One	24
Square80	38
Port	42
FlipTop Push	48
FrameDock	54
Dock	58

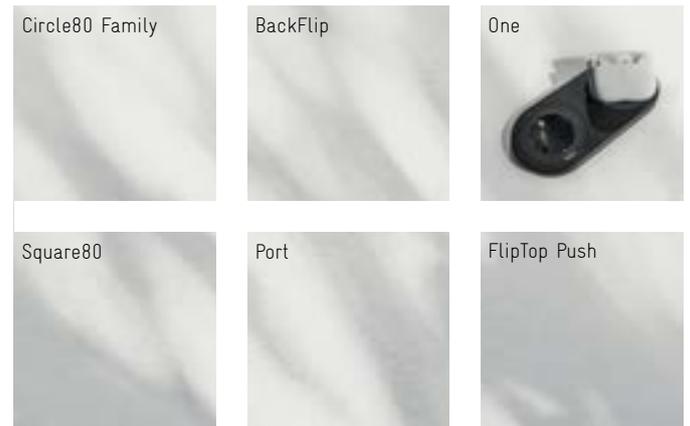

DockSquare	62
R-Dock	66
U-Dock	70
V-Dock	74
Up	78
Vertical	82
Express	86
APSA 6000	102

APSA 7000	108
Wireless Charger	114
Plug	118
Steckdosen / Sockets	124
Netzanschlussmodule /	138
Power supply modules	138
USB- Netzteile /	
USB power supplies	144



Datenmodule / Data modules	148
Wechselmodule /	
Interchangeable modules	164
SmartDrawers	174
CableManagement	180
Accessories	188
Zubehör / Accessories	190

# EVoline®

## Innovativ und energieeffizient seit 1973

Schon 1973 war unsere Firmenzentrale in Bezug auf Gebäudetechnik ihrer Zeit voraus. So konnte das erste Gebäude bereits klimaneutral beheizt werden, indem die Abwärme aus der Kunststoffspritzerei die Fußbodenheizung versorgt. Auch durch die Nutzung einer Geothermie-Anlage sparen wir Energie ein. Dieses fortschrittliche Konzept wurde bei der Betriebserweiterung 2019 weiter ausgebaut. Der Neubau in Altena-Rosmart erweitert nicht nur das nachhaltige Konzept unseres Unternehmens, sondern setzt auch auf die Zukunft des Standorts Lüdenscheid.

**10 Tiefenbohrungen** à 100 m zur Energienutzung.

## Fußboden- und Deckenheizung

Durch thermisch, mit Wasser aktivierte Bodenplatten auf der gesamten Produktions- und Lagerfläche; gespeist u. a. durch Energierückgewinnung.

## Rechnerisches Ergebnis - Rosmart

Ca. 25 % der Gesamtenergie erzeugen wir heute schon selbst.



1973/74 Lüdenscheid



1974

## Innovative and energy efficient since 1973

As early as 1973, our headquarters were ahead of its time in terms of building technology. For instance, climate-neutral heating of the first building was possible because waste heat from the plastic injection moulding machinery was used for the underfloor heating. We also save energy by using a geothermal installation. This progressive concept was repeated when the company was extended in 2019. The new building in Altena-Rosmart doesn't just improve our company's sustainable concept but also boosts the long-term viability of Lüdenscheid as a base.

**10 Deep drillings** of 100 m each for energy utilisation.

## Floor and ceiling heating

Through thermal, water-activated floor panels on the entire production and storage area; fed by energy recovery, among other things.

## Calculated result - Rosmart

We already generate about 25 % of the total energy ourselves today.



2014



2014

# EVoline® Made in Germany




Sehen Sie sich an, wie bei uns „100 Jahre Elektrotechnik“ abgelöst wurden.

Schulte - Elektrotechnik ist ein Pionier innovativer Gebäude-Infrastruktur unter dem Stichwort: „Dezentrale Elektrodistribution“.



**Wir freuen uns auf Ihren Besuch!**

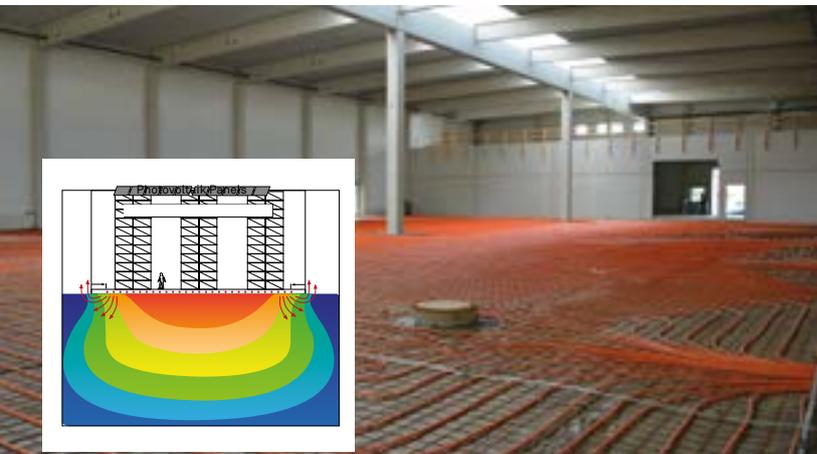


Take a look at how with us „100 years of electrical engineering“ have been replaced.

Schulte - Elektrotechnik is a pioneer of innovative building infrastructure under the keyword: „decentralised electrical distribution“.



**We look forward to your visit!**



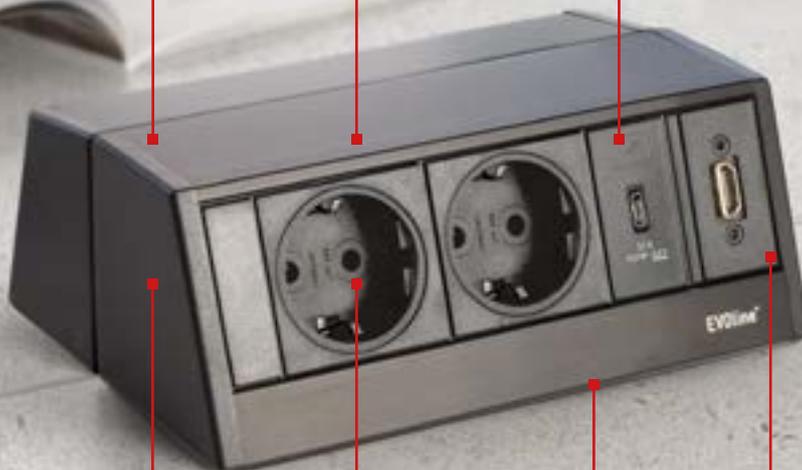

## EVOLine Produkte sind nach Ihren Wünschen frei konfigurierbar.

*EVOLine products freely configurable according to your wishes.*



Verschiedene Farben  
*Various finish options*



Induktive Lademöglichkeit  
mit magnetischer Haltefunktion  
*Options for wireless charging  
with magnetic hold function*



Verschiedene Ländersteckdosen  
*International socket configurations*




Verschiedene Montagemöglichkeiten  
*Different mounting installations*




USB-Charger  
*USB-Charger*



Mit weiterem Zubehör kombinierbar  
*Optional accessories available*




In der Länge (je nach Bestückung)  
variabel  
*Variable profile lengths*



Unterschiedliche Daten- und  
Multimodulmodule  
*Range of data & multimedia modules*



Wechselmodule  
*Interchangeable modules*



Endkappe mit Steckverbinder erhältlich  
*End cap with power input or output  
connector*

**i** Alle Maßangaben sind in  
Millimeter angegeben.

*All dimensions are in millimetres.*





# EVoline® Circle80 Family

Circle80

## Die Drei-in-Eins Lösung

Der Circle80 vereint drei Funktionen in einer 80mm Bohrung: Steckdose, Doppel-USB-Charger und Kabeldurchlass. Zahlreiche Verschlussmodule ermöglichen eine weitere Individualisierung des Kabeldurchlasses.

Circle80

## The three-in-one solution

The Circle80 contains a single power socket, Type A+C USB Charger and cable outlet all in one unit. Optional inserts also available as alternative to cable outlet for additional connectivity.

Circle80 Access

## Individueller Kabeldurchlass

Der Circle80 Access bietet, neben dem klassischen Kabeldurchlass, Platz für zwei Verschlussmodule, frei wählbar aus einer Vielzahl von Möglichkeiten - jederzeit schnell austausch- und montierbar.

Circle80 Access

## More module options

The Circle80 Access cable outlet with locking clip. Also configurable with up to two inserts from the Circle80 range.



Lieferbare Farben

Available colours



Schwarz  
Black



Weiß  
White



Edelstahl-Optik  
Stainless steel look







# EVoline® Circle80 Family

Circle80 / Circle80 Access



## Schnelle Montage von oben und praktische Kabelführung

Der praktische Kabeldurchlass mit integriertem Schieber zur Kabelarretierung lässt auch überschüssige Kabel elegant vom Tisch verschwinden. Die geringe Einbautiefe und das EVoline Befestigungssystem garantieren eine einfache und schnelle Montage von oben.

Circle80 / Circle80 Access

## Quick and easy desk cable management.

The practical cable outlet with integrated slider for locking the cable makes excess cable disappear elegantly from the table. The low installation depth and the EVoline fastening system guarantee simple and fast assembly on top.

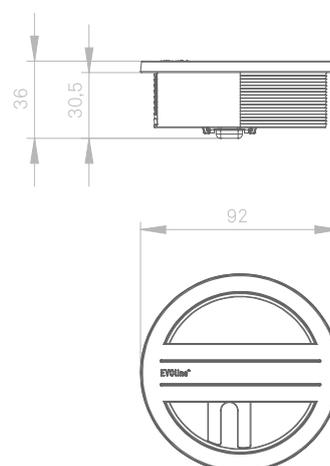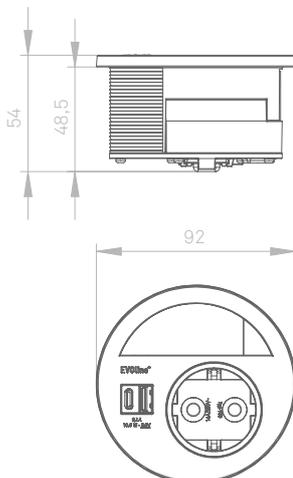



EVOLINE®



# EVOLine® Circle80 Family

Drehdeckel Hide für Circle80


## Elegant abgedeckt

Der praktische Drehdeckel Hide verdeckt elegant die Anschlüsse des Circle80 oder Circle80 Access. Die Verschlussplatte wird einfach in den oberen Bereich eingebaut und ist jederzeit auswechsel- sowie nachrüstbar.

Hide rotating cover for Circle80

## Elegantly covered

The practical Hide rotating cover elegantly conceals the connections of the Circle80 or Circle80 Access. The cover plate is simply installed in the upper section and can be replaced or retrofitted.

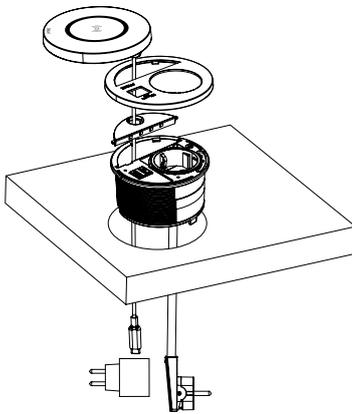

Drehdeckel DisQ für Circle80

## Induktives Laden ohne Kabel

Der Drehdeckel DisQ enthält einen integrierten 15 W Induktionscharger. Somit lassen sich induktionsfähige Smartphones und andere Geräte schnell und kabellos laden. Der Ladeprozess funktioniert sowohl im geschlossenen als auch geöffneten Zustand, wodurch die Funktionen des Circle80 auch weiterhin genutzt werden können.

DisQ rotating cover for Circle80

## Inductive wireless charger

The rotating cover of the DisQ contains an integrated 15W wireless induction charger. The wireless charging function can be used when cover is open or closed; allowing full use of socket and USB chargers. Compatible mobile device required for wireless charging.

Verbindungsmodul für Monitorarm und Circle80

## Die Verbindung von Circle80 und Monitor

Das Ergänzungsmodul MonitorPlate schafft eine optische Verbindung zwischen dem preisgekrönten EVOLine Circle80 und einem Monitorarm.

Connection module for monitor arm and Circle80

## The connection between Circle80 and monitor

The MonitorPlate is an add-on module for the award-winning EVOLine Circle80. It creates an optical connection between the Circle80 and the monitor arm.




Lieferbare Farben

Available colours



Schwarz  
Black

Weiß  
White

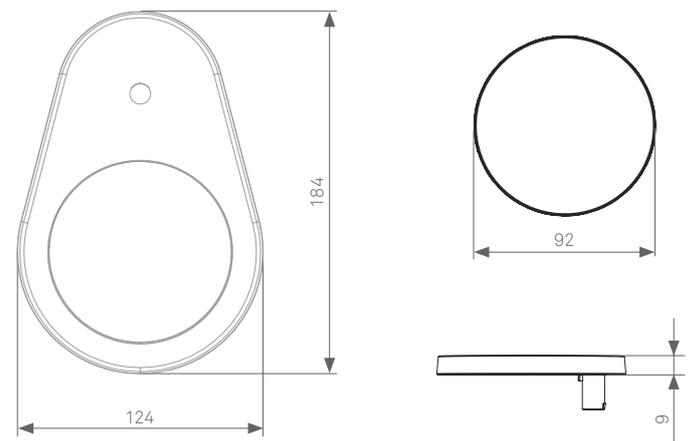

Description	Picture	Specifications	Order Number
<p><b>Circle80</b></p> <p>Type 927-3 VDE-socket, 16 A, with contact-protection. USB Charger 5 V / 3 A; 9 V / 2 A; max. 18 W. Fixed power cable 3 m with protective contact angle plug.</p>		USB Charger Type A + C	
<div style="background-color: red; color: white; padding: 5px; text-align: center; font-weight: bold;"> <p>NEW</p> <p>18 W</p> <p>Double charger</p> </div>		black	1592 7300 7701
		white	1592 7300 7401
		stainless steel effect cover	1592 7301 3701
		USB Charger Type C + C	
		black	1592 7302 3300
	white	1592 7302 3400	
	stainless steel effect cover	1592 7302 3500	
<p><b>Circle80 Access</b></p> <p>Type 927-3 Cable outlet with 2 openings for different cover plates. With fixing slide, to prevent the cables from slipping through.</p>		black	1592 7301 4600
		white	1592 7301 4700
<p><b>Cover plate for Circle80</b></p>		completely closed	
		black	1599 0911 8800
		white	1599 0911 8900
		with 6 cable outlets (each 2 x 4, 7 und 9 mm)	
		black	1599 0911 8600
		white	1599 0911 8700


Description	Picture	Specifications	Order Number
<p><b>Cover plate with multimedia applications for Circle80</b></p>		<p>RJ45 Cat. 6 shielded socket - socket, without cable</p>	
<p>Incl. 3 cable outlets (2 x 4 mm, 1 x 9 mm)</p>		<p>black</p>	<p>1599 0911 9200</p>
		<p>white</p>	<p>1599 0911 9300</p>
		<p>RJ45 Cat. 6A shielded socket - socket, without cable</p>	
		<p>black</p>	<p>1599 0912 3300</p>
		<p>white</p>	<p>1599 0912 3400</p>
		<p>USB 3.0 socket - socket, without cable</p>	
		<p>black</p>	<p>1599 0911 9600</p>
		<p>white</p>	<p>1599 0911 9700</p>
		<p>HDMI 2.0 socket - socket, without cable</p>	
		<p>black</p>	<p>1599 0912 4200</p>
		<p>white</p>	<p>1599 0912 4300</p>
		<p>USB-C 3.1 socket with 1 m cable and USB-C plug (Power: 5 A / max. 100 watts data: up to 10 Gbit / s)</p>	
		<p>black</p>	<p>1599 0913 0300</p>
		<p>white</p>	<p>1599 0913 0400</p>
<p><b>Cover plate with stainless steel pushbutton for Circle80</b></p>		<p>with screw terminals</p>	<p>9331 8870 0000</p>
<p>Pushbutton potential-free Switching data: 240 V = / 3 A LED can be connected separately. LED operating data: 24 V = / 7 mA</p>		<p>with 3 m cable</p>	<p>9331 8850 0000</p>
<p>Incl. 2 cable outlets 9 mm)</p>			

Description	Picture	Specifications	Order Number
<p><b>DisQ rotating cover for Circle80</b></p> <p>Including wireless charging function. With cover plate, suitable for Circle80 and Circle80 Access.</p> <p>Power: 15 watts</p> <p>Separate power supply with USB-C connection is required!</p>		<p><b>without power supply:</b></p> <p>black 1599 0912 9900</p> <p>white 1599 0913 0000</p> <p><b>with USB C power supply 20 W</b></p> <p>black 1599 0913 1400</p> <p>white 1599 0913 1500</p>	
<p><b>Hide rotating cover for Circle80</b></p> <p>With cover plate, suitable for Circle80 and Circle80 Access.</p>		<p>black 1599 0912 9600</p> <p>white 1599 0912 9700</p>	



### Wireless charging via induction

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges devices with inductive charging function (the unit must be placed centrally and flat over the coil).
- transmitter coil is active only when a connection to the receiving device is made
- Please note: The charging function may be impaired by covers or protruding housing parts (e.g. cameras).

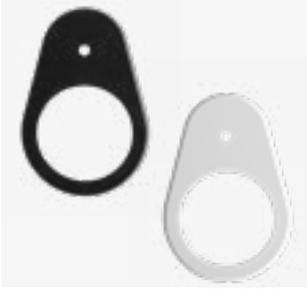Description	Picture	Specifications	Order Number
<p><b>Connection module for monitor arm and Circle80</b></p>		black	9332 5760 0000
<p>Suitable for Circle80 and Circle80 Access.</p>		white	9332 5770 0000





reddot design award |  
winner 2015



# EVoline® BackFlip

BackFlip

## Hochwertiges Design – geniale Funktion

Im geschlossenen Zustand schützt der BackFlip die Steckdosen vor äußeren Einflüssen. Somit ist er optimal für Küchen geeignet und passt sich diesen durch mehrere hochwertige Oberflächen hervorragend an. Mit einem Finger ange- tippt dreht er sich um 180 Grad und gibt einen USB-Charger und 2 Steckdosen frei. Die geringe Einbautiefe von nur 53 mm erlaubt die Montage auch über Schub- laden oder Geräten.

BackFlip

## High quality design and ingenious function

The BackFlip is available in a range of premium finish, making it the perfect solution for providing power to any kitchen. The cover when closed provides addi- tional protection from liquid ingress and when gently pressed, it rotates 180 degrees, revealing two sockets and one USB charger. The shallow unit depth of just 53mm increases the number of places within the kitchen it can be installed.



Flächenbündiger  
Einbau möglich.

Flush mounted  
installation  
possible.



Lieferbare  
Varianten

Available  
surfaces



Edelstahl  
gebürstet  
*Stainless steel  
brushed*



Keramik  
Betonoptik  
*Ceramic  
concrete look*



Glas matt weiß  
(ähnlich RAL 9003)  
*Glass matt white  
(similar RAL 9003)*



Edelstahl matt  
weiß lackiert  
(ähnlich RAL 9010)  
*Stainless steel matt  
white lacquered  
(similar RAL 9010)*



Metallbeschichtet  
Messingoptik  
*Metalcoated  
brass look*





Glas matt  
schwarz  
(ähnlich RAL 9005)  
*Glass matt black  
(similar RAL 9005)*



Glas glänzend  
schwarz  
(ähnlich RAL 9005)  
*Glass glossy black  
(similar RAL 9005)*



Aluminium matt  
schwarz lackiert  
(ähnlich RAL 9005)  
*Aluminium matt  
black lacquered  
(similar RAL 9005)*

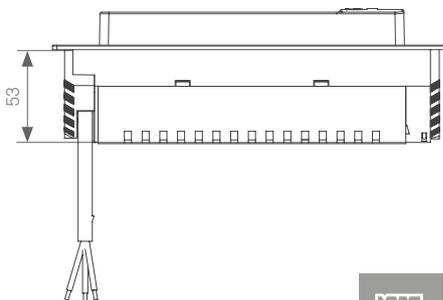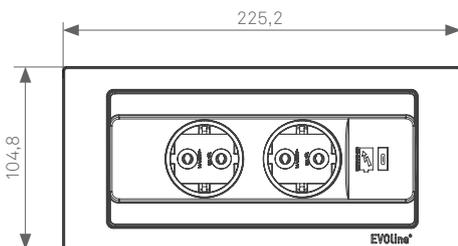

Schnellmontage in Plattenstärken  
von 10 - 40 mm.

Quick assembly in panels of  
10 - 40 mm in thickness.



Description	Picture	Specifications	Order Number
<b>BackFlip</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type C charger, 5V / 2.1A Fixed power supply cable 3.0 m with angled plug.		Cover Brushed stainless steel	1592 7101 6100
		Cover Glass, frosted white	1592 7101 6200
		Cover Glass, glossy black	1592 7101 6300
		Cover Glass, matt black	1592 7102 5700
		Cover matt white lacquered	1592 7101 6400
		Cover matt black lacquered	1592 7101 6500
		Cover Stainless steel, brass look	1592 7101 7700
<b>BackFlip CUISINE</b>  2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1× USB Type C charger, 5V / 2.1A, Fixed power supply cable 2.5 m plug supplied unattached		Cover Brushed stainless steel	1592 7101 4600
		Cover Glass, frosted white	1592 7101 5500
		Cover Glass, glossy black	1592 7101 4800
		Cover Glass, matt black	1592 7102 5800
		Cover matt white lacquered	1592 7101 5600
		Cover matt black lacquered	1592 7101 4700
		Cover Stainless steel, brass look	1592 7101 7600







reddot award 2019  
winner

# EVoline® One



One

### Der kompakte Strom- oder Datenzugang

Die runde Einzelsteckdose kann horizontal oder vertikal eingebaut werden. Dabei garantiert der flexible Kabeleingang eine minimale Einbautiefe von 50 mm. Der One bietet eine breite Auswahl an Moduleinsätzen, Ringen und Deckeln zur Auswahl.

One

### Compact and Accessible Power, Data/Multimedia

The round single socket outlet can be installed horizontally or vertically. The flexible cable entry guarantees a minimum installation depth of 50 mm. The One offers a wide selection of module inserts, rings and covers to choose from.



One mit Diebstahlsicherung Lock

### Schutz vor unerwünschter Demontage in öffentlichen Bereichen

Der One mit Lock kann nur mit einem speziellen Entriegelungswerkzeug geöffnet werden. Optisch unterscheidet sich der One mit Lock lediglich durch ein aufgedrucktes Schloss-Symbol und einen zusätzlich eingebauten Magneten.

One with anti-theft Lock

### Protection against unwanted removal in public areas

The One with Lock can only be opened with a special unlocking tool. Visually, the One with Lock differs only by a printed lock symbol and an additional built-in magnet.

Lieferbare Varianten mit/ohne Deckel

Available surfaces with/without cover



Schwarz  
Black



Schwarz/Edelstahl  
Black/Stainless steel



Schwarz/Messingoptik  
Black





Weiß  
White



Weiß/Edelstahl  
White/Stainless steel



Weiß/Messingoptik  
White/Brass effect

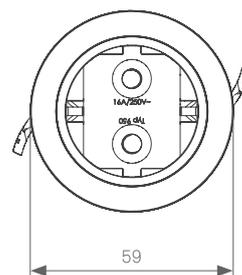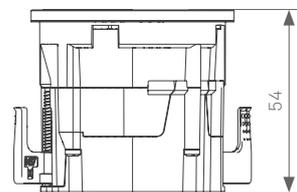





One Distanzhülsen Lift und SlimFit

**Einbau in geringe Hohlräume und sehr dünne Wandstärken**  
Die Distanzhülsen Lift und SlimFit ermöglichen einen Einbau in sehr dünne Wandstärken ab 1 mm. Eine oder beide Hülsen werden je nach Bedarf beim Einbau über den One geschoben, wobei der Lift (12 mm) nur auf- und der SlimFit (10 mm) nur untergebaut werden kann.



Lift - 12 mm



SlimFit - 10 mm

One spacer sleeves Lift and SlimFit

**Installation in shallow materials**

The two spacer sleeves Lift and SlimFit enable the One to be installed in very thin wall thicknesses from 1 mm. One or both sleeves are simply slid over the One as required during installation to achieve an additional 12 mm in front of and/or 10 mm behind the panel.

One Polsterhülse und One Klemmstück

**Problemloser Einbau in Polstermöbeln**

Die Polsterhülse ermöglicht den vielseitigen Einbau in unterschiedliche Polster- und Grundkonstruktionen. Sie fixiert den Bezug sowie die Polsterung, wodurch der One sich optimal in das Möbel integrieren lässt. Diverse Klemmstücke lassen sich an die Grundkonstruktionshöhe anpassen.

One upholstery sleeve and clamping wing

**Upholstered Furniture installation**

The upholstery sleeve can be used in furniture with different fabrics and thickness of padding and base structures. The fabric is held in place between the sleeve and One unit, ensuring both remain fixed over time. Short or Long wing clamps can also be specified to accommodate different combined thicknesses.







Erweiterungsmodul DisQ für One


### Zusätzliches induktives Laden

Der OneDisQ ist ein Erweiterungsmodul zum Laden von induktivfähigen Smartphones. Er kann problemlos mit jedem One installiert und nachgerüstet werden, ohne die vorhandene Einrichtung zu verändern. Die Steckdose oder die Datenmodule des One bleiben während des Ladevorgangs frei und können gleichzeitig für weitere Anwendungen genutzt werden.

Extension module DisQ for One


### Wireless Charging Add-on

The One with DisQ is a module extension providing the much-sought option to add 'Wireless Charging' of compatible smartphones to installed One units. Easy to retrofit, it simply requires a small adjustment to upgrade whilst keeping the existing One installation. Power, USB Charger, Data or Multimedia sockets of the One remain free to use during Wireless Charging and can even be used simultaneously!

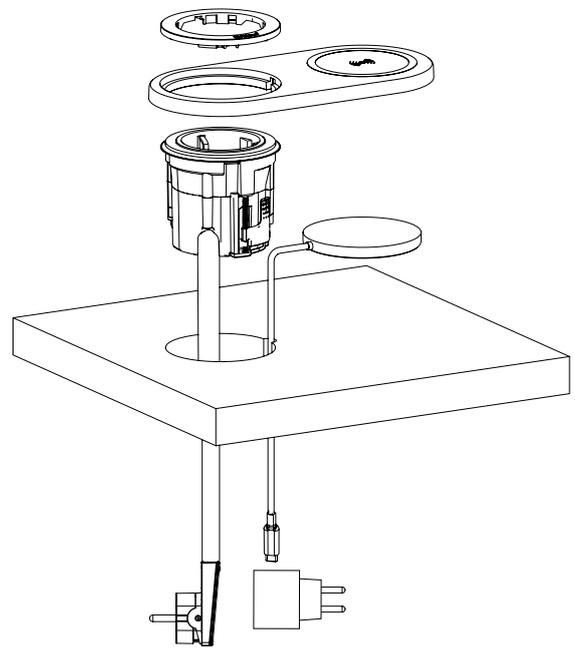

Lieferbare Farben


Available colours




Schwarz  
Black





Weiß  
White

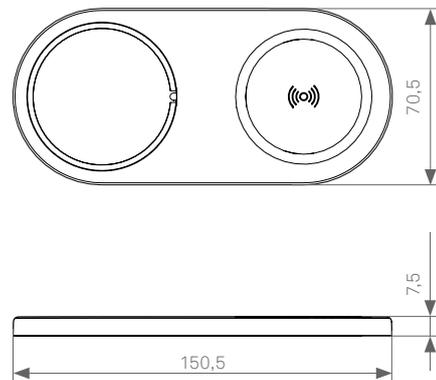


Description	Picture	Specifications	Order Number
<p><b>One with VDE-socket</b></p> <p>Housing made of plastic Clamping wing made of metal</p> <p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: black Ring color: black</p>	1592 8000 0900
		<p>Housing color: black Ring color: black with stainless steel inlay</p>	1592 8000 1100
		<p>Housing color: white Ring color: white</p>	1592 8000 4300
		<p>Housing color: white Ring color: white with stainless steel inlay</p>	1592 8000 6100
<p><b>One with VDE socket and rotating cover</b></p> <p>Housing and cover made of plastic Clamping wing made of metal</p> <p>VDE-socket, 16 A with contact-protection fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.</p>		<p>Housing color: black Cover color: black</p>	1592 8000 4100
		<p>Housing color: black Cover color: black with stainless steel inlay</p>	1592 8000 3900
		<p>Housing color: white Cover color: white</p>	1592 8000 4200
		<p>Housing color: white Cover color: white with stainless steel inlay</p>	1592 8000 6200

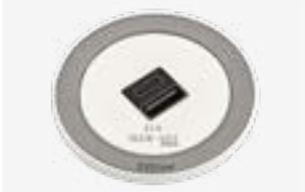Description	Picture	Specifications	Order Number
<b>One with double USB Charger</b>		Housing color: black Ring color: black	1592 8001 4800
Housing made of plastic Clamping wing made of metal		Housing color: black Ring color: black with stainless steel inlay	1592 8001 4900
USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.		Housing color: white Ring color: white	1592 8001 6900
		Housing color: white Ring color: white with stainless steel inlay	1592 8001 9300
<b>One with double USB Charger and rotating cover</b>		Housing color: black Cover color: black	1592 8001 9000
Housing and cover made of plastic Clamping wing made of metal		Housing color: black Cover color: black with stainless steel inlay	1592 8001 8900
USB charger type A + C 5 V / 2,1 A max. fixed power cable 3 m with protective contact angle plug. Clamping range 9 mm to ∞ mm.		Housing color: white Cover color: white	1592 8001 9100
		Housing color: white Cover color: white with stainless steel inlay	1592 8001 9400

Description	Picture	Specifications	Order Number
<p><b>Configurable Basic Housing One</b></p> <p>Housing made of plastic Clamping wing made of metal</p> <p><u>Please specify when ordering:</u> Clamping wing: Clamping range 9 mm to ∞ mm</p> <p>When using an EVOLine upholstery sleeve: Clamping wing: Clamping range 9 mm to 25 mm Clamping wing short: Clamping range 21 mm to 38 mm</p>		<p><b>Housing</b></p> <p>black</p> <p>white</p>	<p>9332 3280 0000</p> <p>9332 3290 0000</p>
<p><b>Ring for One</b></p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3520 0000</p>
<p><b>Ring for One</b></p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3510 0000</p>
<p><b>Ring with rotating cover for One</b></p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3560 0000</p>
<p><b>Ring with rotating cover for One</b></p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3550 0000</p>

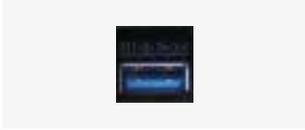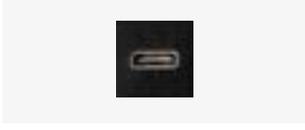Description	Picture	Specifications	Order Number
<p><b>Configurable Basic Housing One with 2 module openings</b></p>		<b>Housing</b>	
<p>Housing made of plastic Clamping wing made of metal</p>		black	9332 3590 0000
<p><u>Please specify when ordering:</u> Clamping wing: Clamping range 9 mm to ∞ mm</p>		white	9332 3600 0000
<p>When using an EVOLine upholstery sleeve: Clamping wing: Clamping range 9 mm to 25 mm Clamping wing short: Clamping range 21 mm to 38 mm</p>		<b>Module</b>	
		RJ45 Cat. 6 shielded socket - socket, without cable	9331 8090 0000
		RJ45 Cat. 6A shielded socket - socket, without cable	9331 8290 0000
		USB 3.0 socket - socket, without cable	9331 8530 0000
		USB 3.0 socket - plug, 0.5 m cable	9332 5680 0000
		HDMI 2.0 socket - socket, without cable	9332 5480 0000
		USB-C 3.1 socket with 1 m cable and USB-C plug (Power: 5 A / max. 100 watts Data: up to 10 Gbit/s)	9332 6370 0000
		Cover for module opening	9332 5080 0000

Description	Picture	Specifications	Order Number
<p><b>Configurable basic housing One with anti-theft Lock</b></p> <p>With magnetic lock for unwanted disassembly. Housing made of plastic Clamping wing made of metal</p> <p><u>Please specify when ordering:</u> Clamping wing: Clamping range 9 mm to ∞ mm</p> <p>When using an EVOLine upholstery sleeve: Clamping wing: Clamping range 9 mm to 25 mm Clamping wing short: Clamping range 21 mm to 38 mm</p>		<p><b>Housing</b></p> <p>black, for electricity</p> <p>black, for data</p> <p>white, for electricity</p> <p>white, for data</p>	<p>9332 3280 1000</p> <p>9332 3590 1000</p> <p>9332 3290 1000</p> <p>9332 3600 1000</p>
<p><b>Ring for One with anti-theft Lock</b></p> <p>With magnetic lock for unwanted disassembly.</p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3520 1000</p>
<p><b>Ring with rotating cover for One with anti-theft Lock</b></p> <p>With magnetic lock for unwanted disassembly.</p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3510 1000</p>
<p><b>Ring with rotating cover for One with anti-theft Lock</b></p> <p>With magnetic lock for unwanted disassembly.</p>		<p>black or white, with inlay in stainless steel or brass look</p> <p>Please indicate the ring and inlay colour when ordering</p>	<p>9332 3560 1000</p>
<p><b>Ring with rotating cover for One with anti-theft Lock</b></p> <p>With magnetic lock for unwanted disassembly.</p>		<p>black or white</p> <p>Please indicate the colour when ordering</p>	<p>9332 3550 1000</p>
<p><b>Unlocking device for One ring with anti-theft Lock</b></p>			<p>1599 0928 9700</p>

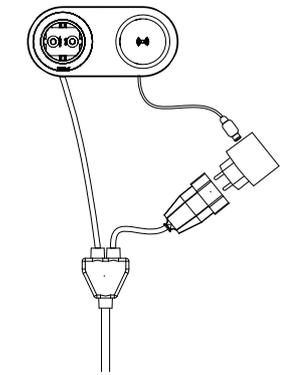Description	Picture	Specifications	Order Number
<p><b>Extension module DisQ for One</b></p>		<p>without power supply unit</p>	
<p>With wireless charging function.</p>		<p>black</p>	<p>9332 8040 0000</p>
<p>Output power: max 15W Supports magnetic attachment for compatible devices.</p>		<p>white</p>	<p>9332 8050 0000</p>
<p>1.5 m connection cable with USB-C plug.</p>		<p><b>incl. 20 W power supply unit</b></p>	
<p>Colour: black or white</p>		<p>black</p>	<p>9332 8380 0000</p>
<p>Power supply unit (minimum: DC 5 V/3 A, DC 9 V/2 A) required.</p>		<p>white</p>	<p>9332 8390 0000</p>
<p><b>One Set</b></p>		<p>VDE socket outlet, 16A, black, with contact protection and black ring</p>	<p>1592 8003 0000</p>
<p>Consisting of</p>		<p>VDE socket outlet, 16A, black, with contact protection and black ring with cover</p>	<p>1592 8003 2600</p>
<p>One; type 928 3.0 m mains connection cable black with wire end ferrules and branch with Euro flat coupling, VDE plug enclosed loose</p>		<p>Double USB charger 2.1 A, type A + C with black ring</p>	<p>1592 8003 0100</p>
<p>Extension module DisQ for One black, 15 W, cable 1.5 m with USB-C plug</p>		<p>Double USB charger 2.1 A, type A + C with black ring with cover</p>	<p>1592 8003 2700</p>
<p>1x 20 W power supply unit with Euro plug with USB-C and USB-A socket, black</p>			

Description	Picture	Specifications	Order Number
<p><b>Distance sleeves set for One</b></p> <p>Consisting of 2 sleeves for mounting the One in very thin walls from 1 mm. Colour: black</p> <p>Lift sleeve: for front installation by 12 mm</p> <p>SlimFit sleeve: for substructure by 10 mm</p>			9332 6300 0000
<p><b>Upholstery sleeve for One</b></p> <p>Additional fixing sleeve for installation in an upholstered piece of furniture</p>		<p>Flat upholstery sleeve (Upholstery thickness of up to 5,5 mm max.)</p> <p>High upholstery sleeve (Upholstery thickness of up to 11 mm max.)</p>	<p>9332 3490 0000</p> <p>9332 3500 0000</p>







DESIGN  
AWARD  
2015



GERMAN  
DESIGN  
AWARD  
NOMINEE  
2016

# EVoline® Square80

Square80

## Strom- und Datenanschlüsse kompakt zusammengefasst

Der Square80, montiert in einer 80 mm-Bohrung, enthält Steckdose, USB-Charger sowie einen weiteren konfigurierbaren Anschluss. Selbst im geschlossenen Zustand macht er ein smartes zusätzliches Angebot: Der Schiebedeckel ist in der optionalen Wireless-Version als induktive Ladestation ausgelegt, auf der kompatible Smartphones kabellos aufgeladen werden können.

Square80

## Compact Power & Data System

The Square80, mounted in an 80 mm hole, contains socket, USB charger and a further configurable connection. Even when closed, it makes a smart additional offer: The sliding cover of the Square80 can also be supplied with built in Wireless charger, which can be used in both open and closed position. Compatible mobile device needed for the wireless charging.



Lieferbare Farben

Available colours





Schwarz  
Black



Weiß  
White



Edelstahl-Optik  
Stainless steel look

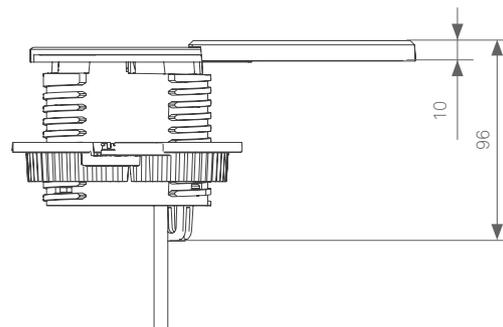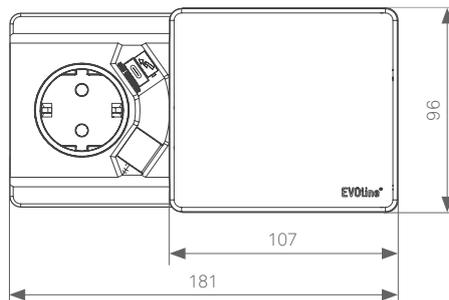

Description	Picture	Specifications	Order Number
<b>Square80</b>  1x VDE-socket, 16 A, contact protected 1x USB Charger Type C, 5 V / 2,1 A Fixed supply cable 3 m with angled plug.		Cover and housing black	1592 7002 4000
		Cover and housing white	1592 7002 4100
		Cover in stainless steel optics housing in black	1592 7002 4200
<b>Square80 with wireless charging function</b>  1x VDE-socket, 16 A, contact protected 1x USB Charger Type C, 5 V / 2,1 A 1x Wireless Charger Fixed supply cable 3 m with angled plug.		Cover and housing black	1592 7002 4600
		Cover and housing white	1592 7002 4700
		Cover in stainless steel optics housing in black	1592 7002 4800



#### Wireless charging via induction

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges devices with inductive charging function (the unit must be placed centrally and flat over the coil).
- transmitter coil is active only when a connection to the receiving device is made
- Please note: The charging function may be impaired by covers or protruding housing parts (e.g. cameras).





Erstline



red dot  
design award

# EVoline® Port



Port

## Die runde Steckdosenleiste – komplett versenkbar

Eingebaut in eine 102 mm-Bohrung kann der Port komplett in den Unterschrank versenkt werden. Der patentierte Wippdeckel ermöglicht, dass Kabel auch im geschlossenen Zustand eingesteckt bleiben können. Durch hochwertige Deckeloberflächen sowie unterschiedliche Profilfarben passt sich der Port jedem Arbeitsumfeld an.

Port

## Fully retractable – Circular power unit

Installed into a 102 mm diameter hole, the Port can be hidden within a central table column. Plug in your devices, and retract the unit into the table with cables exiting the unit via our patented rocking cover. Available in a range of stylish cover and profile finishes.

Profilfarben  
Profile colours



Silberfarbig eloxiert  
Silver coloured anodised



Schwarz eloxiert  
Black anodised

LED Nightlight



Rubinrot  
Ruby red



Smaragdgrün  
Emerald green



Nachtblau  
Night blue



Softweiß  
Soft white

Deckeloberflächen  
Cover surfaces



Kunststoff silberfarbig lackiert (ähnlich RAL 9006)  
Plastic silver coloured lacquered (similar RAL 9006)



Kunststoff weiß lackiert (ähnlich RAL 9003)  
Plastic white lacquered (similar RAL 9003)




Kunststoff schwarz lackiert (ähnlich RAL 9005)  
Plastic black lacquered (similar RAL 9005)



Edelstahl massiv  
Stainless steel solid



Aluminium eloxiert (ähnlich RAL 9005)  
Anodised aluminium (similar RAL 9005)

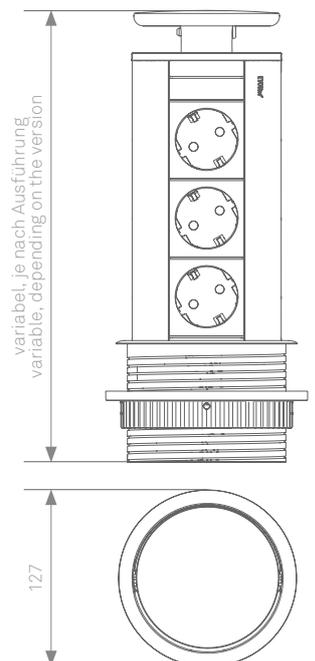

Description	Picture	Specifications	Order Number
<p><b>Port</b></p> <p>Aluminium housing, silver anodised.</p> <p>2× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1000 3300
<p>Rocking cover and collar made of black lacquered plastic</p>		1593 1000 5200	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>		1593 1003 1100	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics.</p> <p>Blue NIGHTLIGHT effect</p>		1593 1003 1200	
<p><b>Port</b></p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant 60°, 16 A, contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1000 0100
<p>Rocking cover and collar made of black lacquered plastic</p>		1593 1000 5000	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>		1593 1002 1600	
<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics.</p> <p>Blue NIGHTLIGHT effect</p>		1593 1003 1300	

Description	Picture	Specifications	Order Number
<p><b>Port Cuisine</b></p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 2.5 m with wire end ferrules</p> <p>Plug supplied unattached.</p>		<p>Rocking cover made of silver lacquered plastic, Collar made of grey plastic</p>	<p>1593 1000 0600</p>
<p><b>Port DATA</b></p> <p>Aluminium housing, silver anodised.</p> <p>2× sockets, VDE-compliant, 60°, 16 A contact-protected</p> <p>Fixed supply cable 3.0 m with angled plug.</p> <p>2× modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect</p>	<p>1593 1003 1400</p> <p>1593 1003 1500</p> <p>1593 1003 1600</p> <p>1593 1003 1700</p>

Description	Picture	Specifications	Order Number
<p><b>Port DATA</b></p> <p>Aluminium housing, silver anodised.</p> <p>3× sockets, VDE-compliant, 60°, 16 A contact-protected.</p> <p>2× Cat. 6 modular couplings</p> <p>Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. Blue NIGHTLIGHT effect</p>	<p>1593 1003 1800</p> <p>1593 1003 1900</p> <p>1593 1003 2000</p> <p>1593 1003 2100</p>

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual Port.**  
See page 6 - 7 for instructions

**Configurable Basic Housing Port**

Aluminium housing silver anodised.

Mounting hole ø 102 mm.



Rocking cover and collar made of silver lacquered plastic

9330 1830 0000

Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics

9330 1360 0000

**Configurable Basic Housing Port BLACK**

Aluminium housing black anodised.

Mounting hole ø 102 mm.



Rocking cover and collar made of black lacquered plastic

9330 5560 0000

Rocking cover made of aluminium, black anodised, collar made of black lacquered plastic

9332 7180 0000

**Nightlight LED Modul for Port**

LEDs underneath rocking cover



Light colour: night blue

9330 3830 0000

Light colour: ruby red

9330 3840 0000

Light colour: emerald green

9330 5790 0000

Light colour: soft white

9331 0260 0000





# EVoline® FlipTop Push



FlipTop Push

## Versteckte Anschlüsse ohne Kabeleinklemmen

Der FlipTop Push ist eine elegante Einbaulösung für alle Arbeitsbereiche. Auch im geschlossenen Zustand können die Kabel eingesteckt bleiben, ohne dass diese geklemmt werden. Durch Fingerdruck öffnet sich die Steckdosenleiste. Ändern sich die Nutzungsanforderungen, können die Daten- und Multimedia-Wechselmodule jederzeit ausgetauscht werden.

FlipTop Push

## Organised cables above and below

The FlipTop Push is an elegant installation solution for all work areas. Even when closed, the cables can remain plugged in without being pinched. The socket strip opens at the touch of a finger. If requirements change, the data and multimedia modules can be replaced at any time.



Flächenbündiger Einbau möglich.  
*Flush mounted installation possible.*



Praktische Kabelführung sorgt für Ordnung unter dem Tisch.  
*Practical cable routing ensures tidiness under the desk.*



Adapter-Clip für sicheren WireLane Anschluss.  
*Adapter clip for secure WireLane connection.*

## Lieferbare Varianten

Available surfaces





Edelstahl gebürstet  
*Stainless steel brushed*



Stahl matt schwarz pulverbeschichtet (ähnlich RAL 9005)  
*Steel matt black powder-coated (similar RAL 9005)*



Stahl matt weiß pulverbeschichtet (ähnlich RAL 9003)  
*Steel matt white powder-coated (similar RAL 9003)*

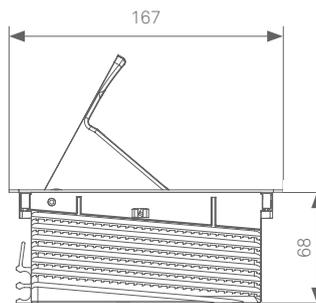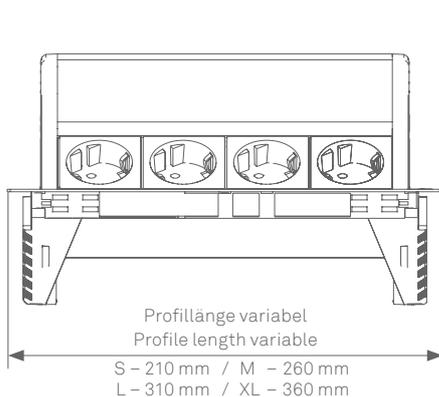

Schnellmontage für Plattenstärken bis 50 mm.



*Fast mounting in panels up to 50 mm in thickness.*



Description	Picture	Specifications	Order Number
<p><b>FlipTop Push S</b></p> <p>3× sockets, VDE-compliant 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7002 4900
<p><b>FlipTop Push Data S</b></p> <p>2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7002 8100
<p><b>FlipTop Push M</b></p> <p>4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7000 2700
<p><b>FlipTop Push M</b></p> <p>2× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× installation space for interchangeable modules Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7010 1400
<p><b>FlipTop Push Data M</b></p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. 2× Cat.6 modular couplings, shielded Fixed supply cable 3.0 m with angled plug. Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium Cover brushed stainless steel</p>	1593 7000 0200


Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** Configure your individual FlipTop Push.  
See page 6 - 7 for instructions.



**Configurable Basic Housing  
FlipTop Push S**

For 3 modules  
Housing made of black anodised aluminium,  
Installation dimensions: 157 × 195 mm

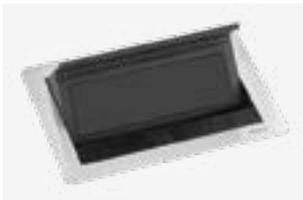

Cover	brushed stainless steel	9331 8010 0000
	black powder-coated	9331 9360 0000
	white powder-coated	9331 9630 0000

**Configurable Basic Housing  
FlipTop Push M**

For 4 modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 245 mm



Cover	brushed stainless steel	9331 8020 0000
	black powder-coated	9331 9370 0000
	white powder-coated	9331 9640 0000

**Configurable Basic Housing  
FlipTop Push L**

For 5 modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 295 mm



Cover	brushed stainless steel	9331 8030 0000
	black powder-coated	9331 9380 0000
	white powder-coated	9331 9650 0000

**Configurable Basic Housing  
FlipTop Push XL**

For 6 Modules  
Housing made of black anodised aluminium,  
Incl. WireLane Adaptor  
Installation dimensions: 157 × 345 mm



Cover	brushed stainless steel	9331 8040 0000
	black powder-coated	9331 9390 0000
	white powder-coated	9331 9660 0000

**Configurable Basic Housing  
FlipTop Push white**

For 3-6 Modules  
Housing made of white powder-coated aluminium,  
cover white powder-coated,  
Incl. WireLane Adaptor



	S	9332 3980 0000
	M	9332 3990 0000
	L	9332 4000 0000
	XL	9332 4010 0000

Description	Picture	Specifications	Order Number
<p><b>WireLane Adaptor</b></p> <p>To connect WireLane to FlipTop Push.</p>			1599 0910 3300
<p><b>FlipTop Push TRAY</b></p> <p>black powder-coated. For protection and cover below the table. Also applicable as cable tray.</p>		<p>for FlipTop Push S</p> <p>for FlipTop Push M</p> <p>for FlipTop Push L</p> <p>for FlipTop Push XL</p>	<p>1599 0910 8600</p> <p>1599 0910 8700</p> <p>1599 0910 8800</p> <p>1599 0910 8900</p>





FrameDock

## Platzsparende Tischsteckdosenleiste

In zeitlosem Design fügt sich der FrameDock optisch in jeden Arbeitsbereich platzsparend ein. Durch die geringe Einbautiefe und die einfache Montage findet der FrameDock überall Platz. Der FrameDock mit Klappdeckel Hide schützt die Steckdosen vor Staub und Schmutz und deckt diese elegant ab.

FrameDock

## In-Desk modular power

With its timeless design, the FrameDock blends in visually with any workspace in a space-saving manner. Thanks to its shallow installation depth and simple mounting, the FrameDock can be installed anywhere. The FrameDock hinged cover Hide protects the sockets from dust and dirt and covers them elegantly.

Lieferbare Varianten

Available surfaces




Silber / schwarz  
Silver / black



Schwarz  
Black




Weiß  
White

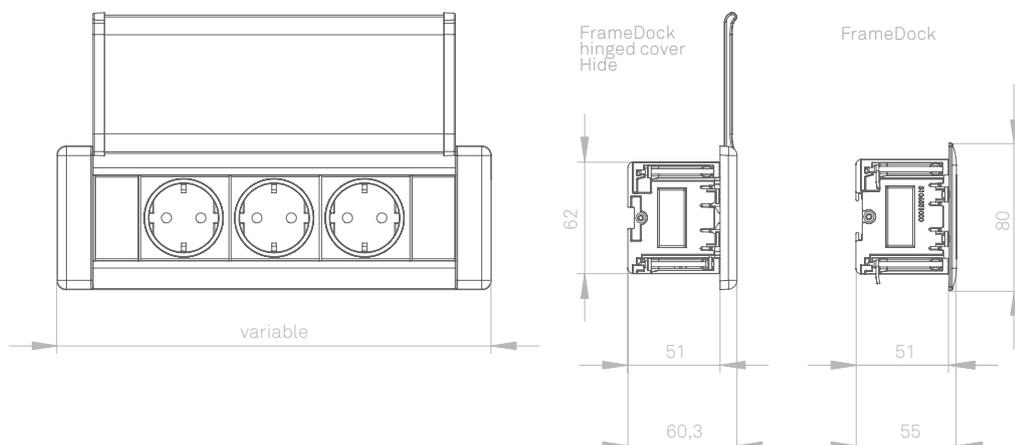

**Beispiele zur Stromversorgung des FrameDocks:**

*Examples of power supply options:*


Festes Netzanschlusskabel unten aus dem Profil.  
In verschiedenen Ländervarianten erhältlich.  
Mit Aderendhülsen, Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

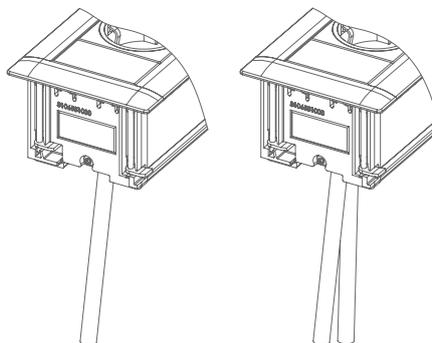

*Fixed power supply cable through the bottom of the profile.*


*Available with several country specific plugs, with wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

Endkappe mit Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich. Stromein- und -ausgang realisierbar.  
Abhängig von der Tischplattenstärke (max. 18 mm)

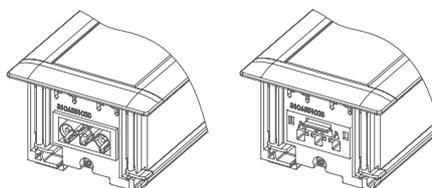

*End cap with power input or output connector, depending on the surface thickness (max. 18 mm)*

Endkappe mit festem Netzanschlusskabel.  
Abhängig von der Tischplattenstärke (max. 18 mm).  
In verschiedenen Ländervarianten erhältlich.  
Mit EVOLine Plug, Aderendhülsen, Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

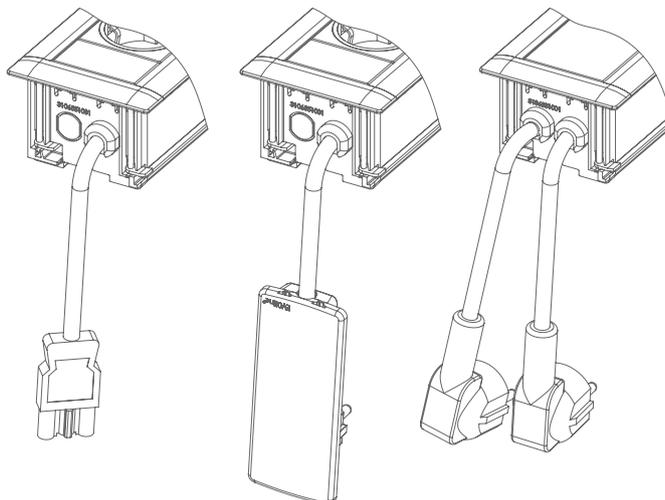


*End cap with fixed power supply cable, depending on the surface thickness (max. 18 mm)*

*Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** Configure your individual FrameDock.

See page 6 - 7 for instructions



**Configurable Basic Housing FrameDock**

Aluminium housing



Profile silver anodised Screw covers black plastic	9331 2180 0000
Profile black anodised Screw covers black plastic	9331 5330 0000
Profile white powder-coated Screw covers white plastic	9331 3540 0000

**Configurable Basic Housing FrameDock hinged cover Hide**

Aluminium housing



Profile and lid silver anodised Screw covers black plastic	9332 5940 0000
Profile and lid black anodised Screw covers black plastic	9332 5960 0000
Profile and lid white powder-coated Screw covers white plastic	9332 5970 0000





Dock

## **Bewährt für Office und Hotel**

Das abgerundete Profil des Dock passt auf jeden Schreibtisch und in jedes Interior. Ob Strom, Daten und/oder Multimedia, die freie Konfigurierbarkeit eröffnet unzählige Möglichkeiten, um auf jede Arbeitssituation perfekt reagieren zu können.

Dock

## **Proven for office and hotel**

The rounded profile of the dock fits on any desk and in any interior. Whether power, data and/or multimedia, the free configurability opens up countless possibilities, to respond perfectly to any work situation.

Lieferbare Varianten

Available colours



Silber  
Silver




Schwarz  
Black



Weiß  
White



Alanox  
Alanox

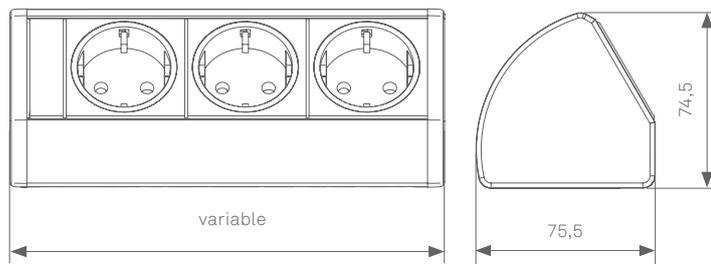

Verschiedene Befestigungsmöglichkeiten finden Sie im Kapitel:

*Mounting options for the EVoline Dock can be found on pg.*

„EVoline® Dock Accessories“



## Beispiele zur Stromversorgung des Docks:

### Examples of power supply options:

Festes Netzanschlusskabel unten aus dem Profil.


In verschiedenen Ländervarianten erhältlich.

Endkappenfarbe: passend zur Profilarfarbe lackiert.

*Fixed Power Supply Cable through the bottom of the profile*

*Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector*

*Color of the end caps painted to match the profiles color.*

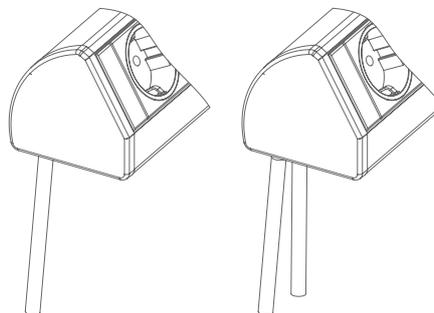


Endkappe mit Steckverbinder Stromein- und -ausgang realisierbar.

Endkappenfarbe: schwarz

*End cap with power input and/or output connector, depending on the surface thickness (max. 18 mm)*

*End cap colour: black*

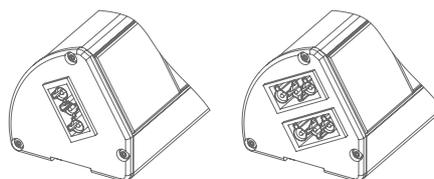

Endkappe mit festem Netzanschlusskabel.

In verschiedenen Ländervarianten erhältlich.


Mit EVOLine Plug, Aderendhülsen, Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

Endkappenfarbe: schwarz

*End cap with fixed power supply cable.*

*Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

*Color of the end caps: black*

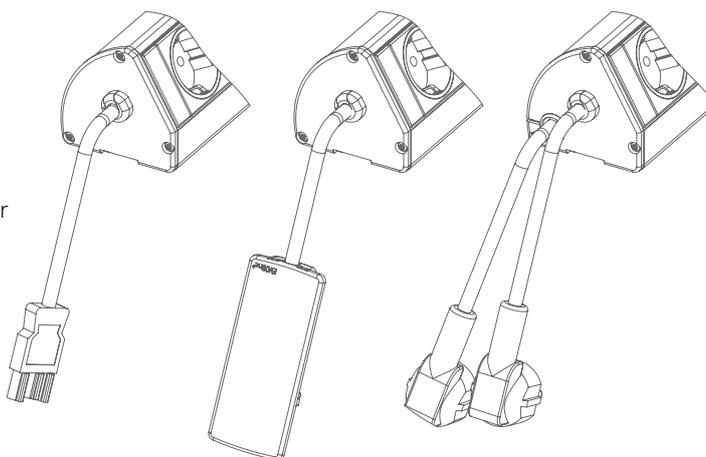

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual Dock.**  
See page 6 - 7 for instructions.



**Configurable Basic Housing Dock BLACK**

Aluminium housing  
Cable entry through end cap or profile.



Black anodised

9330 1811 0000

**Configurable Basic Housing Dock SILVER**

Aluminium housing  
Cable entry through end cap or profile.



Silver anodised

9330 1810 0000

**Configurable Basic Housing Dock STAINLESS**

Aluminium housing  
Cable entry through end cap or profile.



Stainless steel alike anodised (ALANOX®)

9330 8450 0000

**Configurable Basic Housing Dock WHITE**

Aluminium housing  
Cable entry through end cap or profile.



White powder-coated  
End caps plastic laquered to match (in case cable entry through the profile)

9331 3530 0000



# EVoline® DockSquare

Dock Square

## Sicherer Halt an jeder Schreibtischkante und -fläche

Der DockSquare vereint Kompaktheit, Variabilität und Mobilität am Arbeitsplatz. Mit den verschiedenen Montagemöglichkeiten ist der DockSquare immer die richtige Wahl. Die schnelle Klebmontage erleichtert den Aufbau und lässt sich jederzeit wieder lösen. Darüber hinaus stehen unterschiedliche Metallklammern und Befestigungswinkel zur Verfügung, welche sich an der Tischkante oder als Auf-/Unterbau befestigen lassen.

Dock Square

## Securely fixed to any surface

The DockSquare combines compactness, variability and mobility at the workplace. With the various mounting options the DockSquare is always the right choice. The quick adhesive mounting makes assembly easier and can be removed again at any time. In addition, there are different metal clamps and mounting brackets available, which can be attached to the edge of the table or as a superstructure/substructure.



## Lieferbare Farben

Available surfaces



Silber  
Silver







Schwarz  
Black



Weiß  
White

## Befestigungsmöglichkeiten

Fixing Options

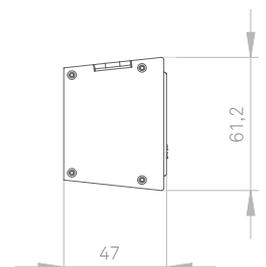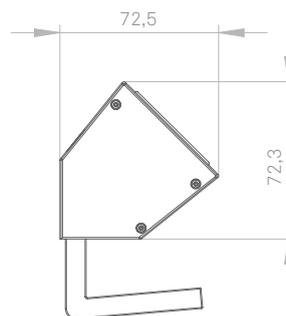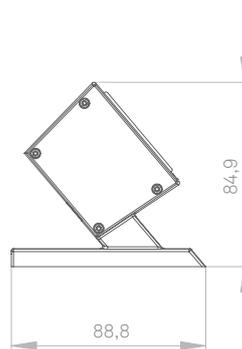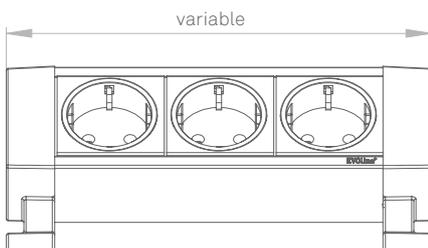

## **K** Configure your personal DockSquare.

See page 6 -7 for instructions.



### **Configurable Basic Housing DockSquare**

Aluminium housing



silver anodised	9332 0720 0000
black anodised	9332 0730 0000
white powder coated	9332 1170 0000

### **End caps with mounting feet for surface mounting**

End caps with mounting feet made of plastic

Double sided strips  
pre-assembled - removable without residue



#### **with double sided strips:**

black, left	9332 7720 0000
black, right	9332 7730 0000
white, left	9332 7740 0000
white right	9332 7750 0000

#### **without double sided strips:**



black, left	9332 7680 0000
black, right	9332 7690 0000
white, left	9332 7700 0000
white right	9332 7710 0000

### **End caps with integrated clamps for surface mounting**

End caps made of black plastic with integrated aluminium clamps. Clamp integrated, top mounting with hexagon socket M4. clamping range:  
8 mm - 20 mm and 20 mm - 40 mm.



black, left	9332 7880 0000
black, right	9332 7890 0000
white, left	9332 7900 0000
white right	9332 7910 0000

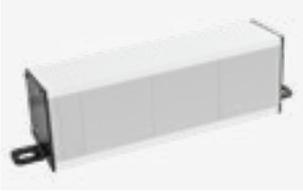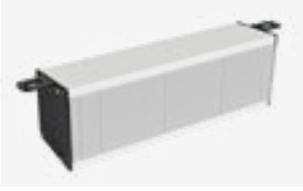Description	Picture	Specifications	Order Number
<p><b>End caps with mounting feet and clamps for surface mounting</b></p>		<p><b>with knurled screw:</b> (clamping range: 12 - 28 mm)</p>	
<p>End caps with mounting feet made of plastic</p>		<p>black, left black, right</p>	<p>9332 7760 0000 9332 7770 0000</p>
<p>Metal clamp, black For mounting from below</p>		<p>white, left white right</p>	<p>9332 7780 0000 9332 7790 0000</p>
<p>For optimum clamping effect, the clamps are simply pushed completely into the feet</p>		<p><b>with hexagon socket:</b> (clamping range: 17 - 28mm)</p>	
		<p>black, left black, right</p>	<p>9332 7800 0000 9332 7810 0000</p>
	<p>white, left white right</p>	<p>9332 7820 0000 9332 7830 0000</p>	
		<p><b>with hexagon socket:</b> (clamping range: 25 mm)</p>	
	<p>black, left black, right</p>	<p>9332 7840 0000 9332 7850 0000</p>	
	<p>white, left white right</p>	<p>9332 7860 0000 9332 7870 0000</p>	
<p><b>End caps with mounting brackets for surface mounting</b></p>		<p>black, left black, right</p>	<p>9332 5840 0000 9332 5880 0000</p>
<p>End caps with mounting brackets made of metal</p>		<p>white, left white right</p>	<p>9332 5860 0000 9332 5900 0000</p>
<p>For mounting from above</p>			
<p><b>End caps with mounting brackets for substructure mounting</b></p>		<p>black, left black, right</p>	<p>9332 5830 0000 9332 5870 0000</p>
<p>End caps with mounting brackets made of metal</p>		<p>white, left white right</p>	<p>9332 5850 0000 9332 5890 0000</p>
<p>For mounting from below</p>			
<p><b>Spare double sided strips</b></p>			<p>9332 1050 0000</p>
<p>2x double sided strips for mounting the DockSquare. Removable without residue.</p>			



R-Dock

## Schlanke Form

Mit seiner leicht angeschrägten Front sowie den variablen Bestückungsmöglichkeiten lässt sich der R-Dock in vielen Anwendungen komfortabel nutzen. Durch seine Bauform passt er optimal in jeden 90-Grad Winkel. Rücken an Rücken wird er auf freier Fläche zur Doppeleinheit.

R-Dock

## A close fit

*With its slightly bevelled front and variable mounting options, the R-Dock can be conveniently used in many applications. Thanks to its design, it fits perfectly into any 90-degree angle. Back to back, it becomes a double unit in an open space.*




Lieferbare  
Farben  
Available  
colours



Silber  
Silver




Schwarz  
Black



Weiß / schwarz  
White / black



Weiß / weiß  
White / white

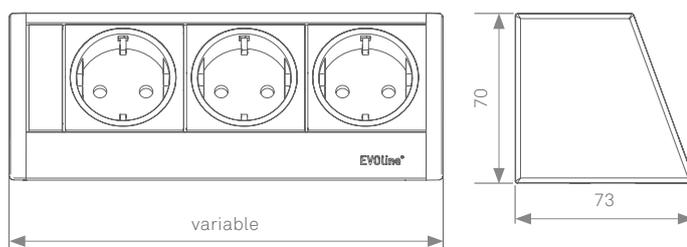

Verschiedene  
Befestigungsmöglichkeiten  
finden Sie im Kapitel:

*Mounting options for  
the EVoline Dock  
can be found on pg.*

„EVoline® Dock Accessories“



## Beispiele zur Stromversorgung des R-Docks:

### Examples of power supply options:


Festes Netzanschlusskabel unten aus dem Profil.

In verschiedenen Ländervarianten erhältlich.

Mit Aderendhülsen, Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

*Fixed Power Supply Cable through the bottom of the profile*


*Available with several country specific plugs, with wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

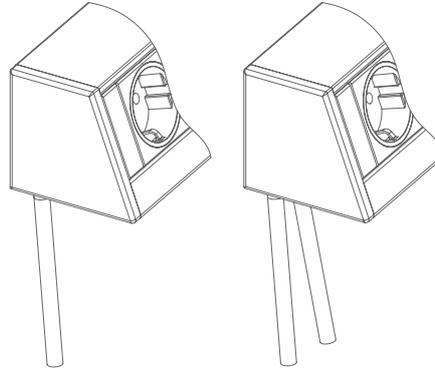

Endkappe mit Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

Stromein und -ausgang realisierbar.

*End cap with power input or output connector powered by GST18 or WAGO WINSTA.*

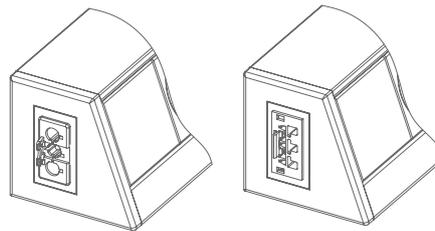


Endkappe mit festem Netzanschlusskabel.

In verschiedenen Ländervarianten erhältlich.

Mit EVOLine Plug, Aderendhülsen, Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

*End cap with fixed power supply cable*

*Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

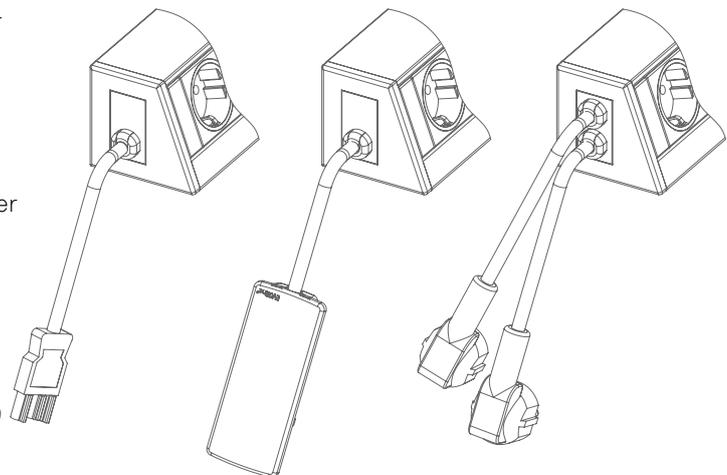

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual R-Dock.**  
See page 6 - 7 for instructions.



**Configurable Basic Housing R-Dock**

Aluminium housing.  
Power supply cable entry through end cap or profile.



Silver anodised

9331 0620 0000



Black anodised

9332 1980 0000



White powder-coated

9331 4340 0000



U-Dock

## Untertisch-Steckdosenleiste

Das Aluminiumprofil des U-Dock lässt sich auf vielfältige Weise an, unter oder vor der Arbeitsfläche befestigen. Als robuste Basis für eine professionelle Strom- und Datenversorgung nimmt er neben frei konfigurierbaren Strom- und Datenanschlüssen auch Sicherheitsmodule für den Schutz von Mitarbeitern und Maschinen auf. Die elektrisch getrennten Wechselmodule lassen sich jederzeit austauschen.

U-Dock

## Under-Desk power bar

The aluminium profile of the U-Dock can be attached to, below or in front of the worktop in a variety of ways. As a robust basis for a professional power and data supply, it includes freely configurable power and data connections as well as safety modules for the protection of employees and machines. The electrically isolated interchangeable modules can be exchanged at any time.



Lieferbare Farben

Available colours



Silber  
Silver



Schwarz  
Black



Optional:  
Endkappe mit  
Befestigungswinkel

Optional:  
end cap with  
mounting bracket



Verschiedene  
Befestigungsmöglichkeiten  
finden Sie im Kapitel:

Mounting options for  
the EVoline Dock  
can be found on pg.

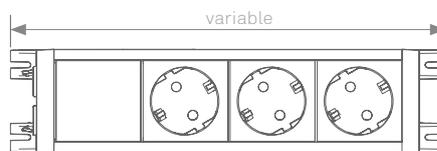

„EVoline® Dock Accessories“




## Beispiele zur Stromversorgung des U-Docks:

### Examples of power supply options:

Endkappe mit Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich. Stromein- und -ausgang realisierbar.

*End cap with input or output connector powered by GST18 or WAGO WINSTA.*

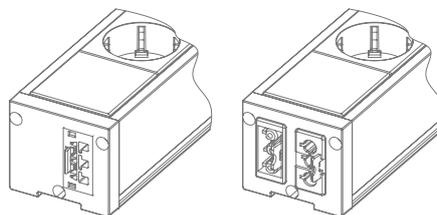


Endkappe mit festem Netzanschlusskabel, in verschiedenen Ländervarianten erhältlich.

Mit Aderendhülsen, EVoline Plug oder Schutzkontakt Winkelstecker erhältlich.

*End cap with fixed power supply cable.*


*Available with several country specific plugs, EVoline Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

*End cap colour: black*

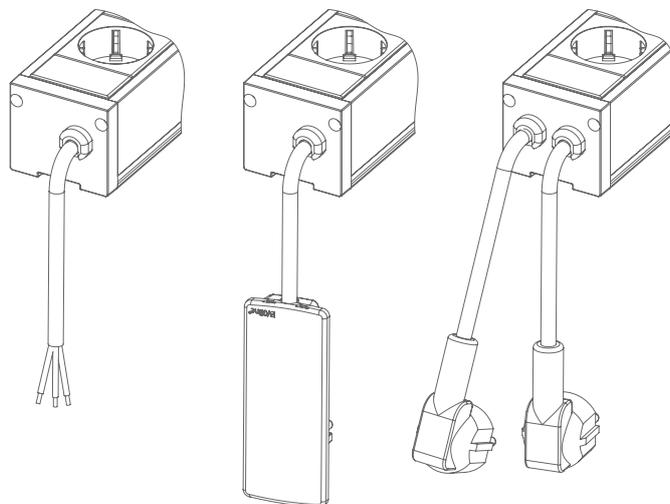

Alle oben aufgeführten U-Dock Endkappen sind mit oder ohne Befestigungswinkel erhältlich.

*All above mentioned U-Dock end caps are available with or without mounting angles.*

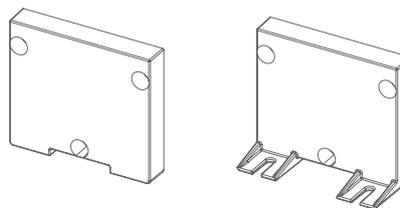

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual U-Dock.**  
See page 6 - 7 for instructions.



**Configurable Basic Housing U-Dock**

Aluminium housing  
End caps optionally with or without mounting angles



Silver anodised 9330 8510 0000

Black anodised 9332 4770 0000



V-Dock

## Passt in jede Ecke

Der V-Dock kann horizontal oder vertikal sowie als Auf- und Unterbau montiert werden. Seine Länge und Konfiguration sind wie üblich variabel. Ein weiterer Vorteil: Das Anschlusskabel wird hinter dem Profil unsichtbar im Winkel geführt. Durch die 45-Grad-Ausrichtung lassen sich Strom- und Datenkabel bequem anschließen.

V-Dock

## Fits in every corner

The V-Dock can be mounted horizontally or vertically and is variable in length. A further advantage: the connection cable is invisibly guided behind the profile in the angle. The V-Dock's 45-degree orientation in the room makes it easy to connect power and data cables.



Lieferbare  
Farben


Available  
colours



Silber  
Silver



Schwarz  
Black

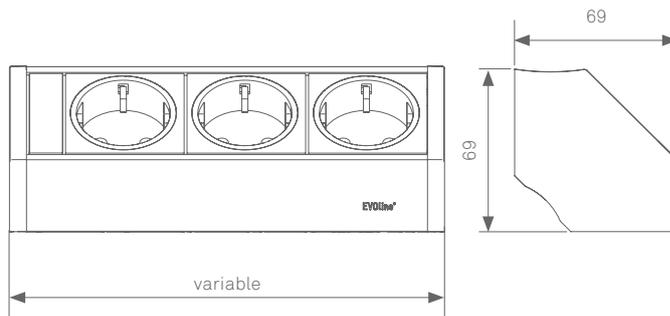

Verschiedene  
Befestigungsmöglichkeiten  
finden Sie im Kapitel:

Mounting options for  
the EVoline Dock  
can be found on pg.

„EVoline® Dock Accessories“




## Beispiele zur Stromversorgung des V-Dock:

### Examples of power supply options:

Festes Netzanschlusskabel unten aus dem Profil mit Aderendhülsen.

*End cap with power input and/or output connector.*

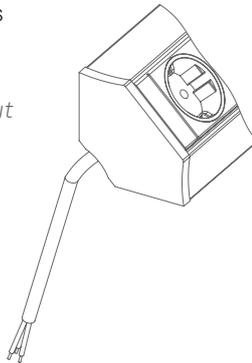


Festes Netzanschlusskabel unten aus dem Profil.

In verschiedenen Ländervarianten und mit EVOLine Plug, Steckverbinder powered by GST18 oder WAGO WINSTA erhältlich.

*End cap with fixed power supply cable.*

*Available with several country specific plugs, EVOLine Plug, wire end ferrules, connector powered by GST18 or WAGO WINSTA.*

*End cap colour: black*

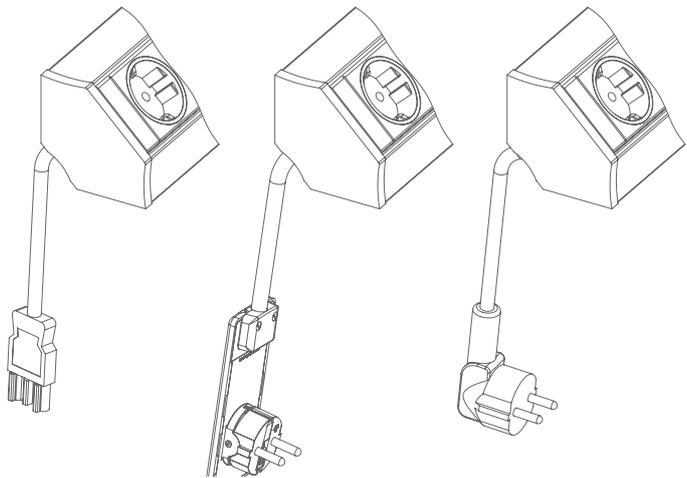

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**K** **Configure your individual V-Dock.**  
See page 6 - 7 for instructions.



**Configurable Basic Housing V-Dock**

Aluminium housing  
From a length of 250 mm, 2 angle profiles of 100 mm are required for fixing.



Silver anodised

9330 5600 0000

**Configurable Basic Housing V-Dock**

Aluminium housing  
From a length of 250 mm, 2 angle profiles of 100 mm are required for fixing.



Black anodised

9331 5850 0000



Up

## Platzsparende Standfußlösung

Die vertikale Elektrifizierungslösung Up ist ein wahres Platzsparwunder. Der Standfuß der vertikalen Mehrfachsteckdose kann nicht nur fest mit dem Untergrund verschraubt werden, sondern lässt sich auch mithilfe von Klebestreifen auf jeder beliebigen Tischoberfläche – sogar auf Glas – sicher anbringen und rückstandslos entfernen.

Up

## Free standing power outlet

With the vertical electrification solution Up, we present a true space-saving miracle. The stand of the vertical multiple socket can not only be firmly screwed to the base, but can also be securely attached to any table surface – even glass – with the help of adhesive strips and removed without leaving any residue.



## Lieferbare Farben

Available colours




Silber  
Silver



Schwarz  
Black



Weiß  
White

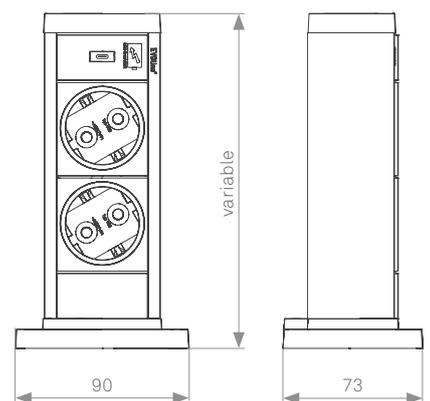

## **K** Configure your individual Up.

See page 6 - 7 for instructions.



### **Configurable Basic Housing Up**

Aluminium housing  
2x Adhesive tapes

Note: Max. configuration: 3 ½ modules



### **Housing**

Silver anodised	9332 2690 0000
black anodised	9332 2680 0000
white powder coated	9332 2700 0000





# EVOLine® Vertical



Vertical

**Anschlüsse auf ergonomischer Höhe**

Der Vertical ist die mobile und platzsparende Lösung für den freien Raum und somit die ideale Lösung für Büros, Hotels oder Verkaufsräume. Mit einer Höhe von bis zu 1,20 m macht er das Herunterbeugen nach Steckdosen überflüssig: Konfigurierbare Strom-, Multimedia- und Datenanschlüsse sind in bequemer Höhe jederzeit erreichbar.

Vertical

**Free standing and movable power unit**

The Vertical stands freely in the room, stable on a solid base. Upright, mobile and space-saving, it is the ideal solution for offices, hotels or salesrooms. With a height of up to 1.20 m, the EVOLine Vertical eliminates the need to bend down for sockets: power, multimedia and data connections are easily accessible at a comfortable height.


Lieferbare Farben  
Available colours



Silber  
Silver



Schwarz  
Black

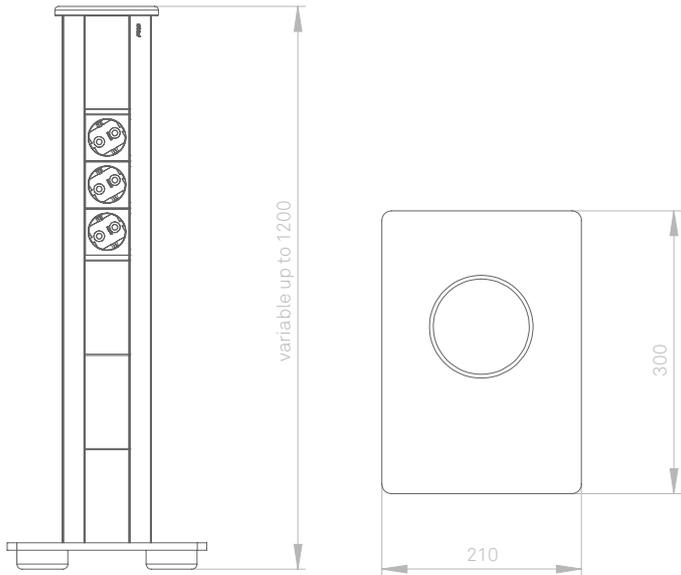

## **K** Configure your individual Vertical.

See page 6 - 7 for instructions.



### **Configurable Basic Housing Vertical with cast iron base**

Typ 934-3;  
Aluminium housing,  
Cover made of aluminium, black  
powder-coated.  
Base made of solid cast iron, black  
powder-coated.

Dimensions of stand: Ø 225 mm  
height: 40 mm

Total height: approx. 620 -1200mm

Remaining quantities available



silver anodised 9330 8560 0000

black anodised 9330 8570 0000

Profile height 600 mm  
Max. profile height 1200 mm

Profile extension over  
600 mm per 50 mm 9330 0130 0000

### **Configurable Basic Housing Vertical with steel base**

Typ 934-7;  
Housing Aluminium, silver or black  
anodised;  
Cover aluminium, black powder-  
coated  
Stand made of steel, black lac-  
quered with four height-adjustable  
plastic feet.

Dimensions of stand: width 210mm,  
depth 300mm, height 23-29mm;

Total height: approx. 620 -1200mm



silver anodised 9332 7970 0000

black anodised 9332 7980 0000

Profile height 600 mm  
Max. profile height 1200 mm

Profile extension over  
600 mm per 1 mm 9332 9160 0000







Express

### Sicherheit von Anfang an

Die Express steht für modulare Energieversorgung mit dezentralen Sicherheitsbausteinen in der Büroelektrifizierung. Installationssteckverbindungen ermöglichen ein schnelles Zusammenstecken verschiedener Ausführungen.

**Selbstverlöschende und schwer entflammare Kunststoffe sind Standard.**

Express

### Safety right from the start

EVoline relies for office electrification on a modular power supply with decentralised safety modules. The Express isolates sensitive circuits from each other and ensures operational safety.

**Self-extinguishing and flameretardant plastics are standard.**


Lieferbare  
Farben  
Available  
colours




Schwarz  
Black



Rot  
Red

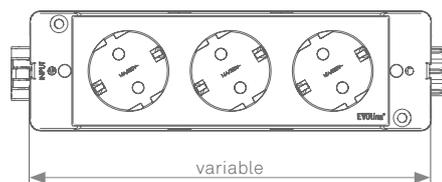

variable  
2 Sockets - 148 mm  
3 Sockets - 198 mm  
4 Sockets - 248 mm



Description	Picture	Specifications	Order Number
<p><b>Express Type 910</b> <b>2 gang Power Bar, VDE</b></p> <p>for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 148 mm</p>		<p><b>Powered by GST18</b></p> <p><b>without contact protection</b> Housing colour black 1591 0200 0100 Housing colour red 1591 0200 0120</p> <p><b>contact protected</b> Housing colour black 1591 0200 0110 Housing colour red 1591 0200 0130</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b> Housing colour black 1591 0200 0200 Housing colour red 1591 0200 0220</p> <p><b>contact protected</b> Housing colour black 1591 0200 0210 Housing colour red 1591 0200 0230</p>	
<p><b>Express Type 910</b> <b>3 gang Power Bar, VDE</b></p> <p>for plug types: F, E+F, C rated voltage: 250 V / 50 Hz rated current: 16 A halogen-free</p> <p>Dimensions : 46 × 59 × 198 mm</p>		<p><b>Powered by GST18</b></p> <p><b>without contact protection</b> Housing colour black 1591 0300 0100 Housing colour red 1591 0300 0120</p> <p><b>contact protected</b> Housing colour black 1591 0300 0110 Housing colour red 1591 0300 0130</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b> Housing colour black 1591 0300 0200 Housing colour red 1591 0300 0220</p> <p><b>contact protected</b> Housing colour black 1591 0300 0210 Housing colour red 1591 0300 0230</p>	


Description	Picture	Specifications	Order Number
<p><b>Express Type 910</b>  <b>4 gangPower Bar, VDE</b></p> <p>for plug types: F, E+F, C                      rated voltage: 250 V / 50 Hz.                      rated current: 16 A                      halogen-free</p> <p>Dimensions : 46 × 59 × 248 mm</p>		<p><b>Powered by GST18</b></p> <p><b>without contact protection</b>                      Housing colour black                      Housing colour red</p> <p><b>contact protected</b>                      Housing colour black                      Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b>                      Housing colour black                      Housing colour red</p> <p><b>contact protected</b>                      Housing colour black                      Housing colour red</p>	<p>1591 0400 0100                      1591 0400 0120                        1591 0400 0110                      1591 0400 0130                          1591 0400 0200                      1591 0400 0220                        1591 0400 0210                      1591 0400 0230</p>

Description	Picture	Specifications	Order Number
<p><b>Express Type 910</b>  <b>2 gang Power Bar, BE/FR</b></p> <p>for plug types: F, E+F, C            rated voltage: 250 V / 50 Hz            rated current: 16 A            halogen-free</p> <p>Dimensions : 46 × 59 × 148 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black            Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black            Housing colour red</p>	<p>1591 0201 0100            1591 0201 0120            1591 0201 0200            1591 0201 0220</p>
<p><b>Express Type 910</b>  <b>3 gang Power Bar, BE/FR</b></p> <p>Rated voltage: 250V / 50 Hz            Rated current: 16 A            halogen-free</p> <p>Dimensions : 46 × 59 × 198 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black            Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black            Housing colour red</p>	<p>1591 0301 0100            1591 0301 0120            1591 0301 0200            1591 0301 0220</p>
<p><b>Express Type 910</b>  <b>4 gang Power Bar, BE/FR</b></p> <p>Rated voltage: 250V / 50 Hz            Rated current: 16 A            halogen-free</p> <p>Dimensions : 46 × 59 × 248 mm</p>		<p>Powered by GST18</p> <p><b>without contact protection</b></p> <p>Housing colour black            Housing colour red</p> <p><b>WAGO WINSTA MIDI</b></p> <p><b>without contact protection</b></p> <p>Housing colour black            Housing colour red</p>	<p>1591 0401 0100            1591 0401 0120            1591 0401 0200            1591 0401 0220</p>

Description	Picture	Specifications	Order Number
<p><b>Express Type 910</b> <b>2 gang Power Bar, CH</b></p>		<p>Powered by GST18</p>	
<p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p>		<p>without contact protection</p>	1591 0203 0100
<p>Dimensions : 46 × 59 × 148 mm</p>		<p>Housing colour black</p>	1591 0203 0120
		<p>WAGO WINSTA MIDI</p>	
		<p>without contact protection</p>	
		<p>Housing colour black</p>	1591 0203 0200
		<p>Housing colour red</p>	1591 0203 0220
<p><b>Express Type 910</b> <b>3 gang Power Bar, CH</b></p>		<p>Powered by GST18</p>	
<p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p>		<p>without contact protection</p>	1591 0303 0100
<p>Dimensions : 46 × 59 × 198 mm</p>		<p>Housing colour black</p>	1591 0303 0120
		<p>WAGO WINSTA MIDI</p>	
		<p>without contact protection</p>	
		<p>Housing colour black</p>	1591 0303 0200
		<p>Housing colour red</p>	1591 0303 0220
<p><b>Express Type 910</b> <b>4 gang Power Bar, CH</b></p>		<p>Powered by GST18</p>	
<p>Rated voltage: 250V / 50 Hz Rated current: 10 A halogen-free</p>		<p>without contact protection</p>	1591 0403 0100
<p>Dimensions : 46 × 59 × 248 mm</p>		<p>Housing colour black</p>	1591 0403 0120
		<p>WAGO WINSTA MIDI</p>	
		<p>without contact protection</p>	
		<p>Housing colour black</p>	1591 0403 0200
		<p>Housing colour red</p>	1591 0403 0220

Description	Picture	Specifications	Order Number
<p><b>Express Typ 910</b> <b>2 gang Power Bar, GB</b></p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 148 mm</p>		<p><b>Powered by GST18</b></p> <p><b>with contact protection</b> Housing colour black Rated current: 13 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 3,15 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 5 A</p>	<p>1591 0206 0110</p> <p>1591 0207 0110</p> <p>1591 0208 0110</p>
<p><b>Express Typ 910</b> <b>3 gang Power Bar, GB</b></p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 198 mm</p>		<p><b>Powered by GST18</b></p> <p><b>with contact protection</b> Housing colour black Rated current: 13 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 3,15 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 5 A</p>	<p>1591 0306 0110</p> <p>1591 0307 0110</p> <p>1591 0308 0110</p>
<p><b>Express Typ 910</b> <b>4 gang Power Bar, GB</b></p> <p>Rated voltage: 250 V / 50 Hz halogen-free</p> <p>Dimensions: 46 × 59 × 248 mm</p>		<p><b>Powered by GST18</b></p> <p><b>with contact protection</b> Housing colour black Rated current: 13 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 3,15 A</p> <p><b>with contact protection</b> Housing colour black Single fuse: 5 A</p>	<p>1591 0406 0110</p> <p>1591 0407 0110</p> <p>1591 0408 0110</p>

Description	Picture	Specifications	Order Number
<p><b>Express Type 901</b>  <b>3 gang Power Bar</b></p> <p>Rated voltage: 250V / 50 Hz            Rated current: 16 A            halogen-free</p> <p>Dimensions : 39 x 59 x 186 mm</p>		<p><b>Powered by GST18</b></p> <p>Housing colour black            Housing colour red</p>	<p>1590 1100 1500            1590 1100 1600</p>

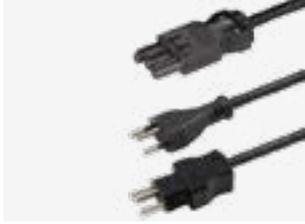Description	Picture	Specifications	Order Number
<p><b>Express Power Cord</b></p> <p>Plug type F, E &amp; C (e.g. Germany, Austria, France) with protective contact right-angle plug and connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 1 m (black) 6590 0601 0500 Cable length 1,5 m (black) 6590 0601 5500 Cable length 2 m (black) 6590 0602 0500 Cable length 3 m (black) 6590 0603 0500 Cable length 3 m (red) 6590 0603 0600 Cable length 4 m (black) 6590 0604 0500 Cable length 5 m (black) 6590 0605 0500 Cable length 5 m (red) 6590 0605 0600</p>	
<p><b>Express Power Cord</b></p> <p>Plug type G (e.g. Great Britain), 13 A with protective contact right-angle plug and connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 3 m 6591 1603 0500</p>	
<p><b>Express Power Cord</b></p> <p>Plug type J &amp; C (e.g. Switzerland) with earthing contact plug and connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 3 m, 10 A 1590 0623 0500</p>	
<p><b>Express Power Supply Module with Overload Circuit Breaker</b></p> <p>Plug type J &amp; C (e.g. Switzerland) with overload switch 10 A reconnectable and plug connector (socket) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Jack)</b></p> <p>Cable length 3 m 1599 0911 7200</p>	

Description	Picture	Specifications	Order Number
<p><b>Express VDE Coupling</b></p> <p>Coupling for plug type F, E &amp; C (e.g. Germany, Austria, France) Cable 3 x 1.5 mm<sup>2</sup> Colour: black</p>		<p><b>Socket connector (Plug)</b></p> <p>Cable length 0,5 m</p>	1599 0912 5400
<p><b>Express connection cable</b></p> <p>Cable 3 x 1,5mm<sup>2</sup> with socket connector (plug) and socket connector (jack) Colour: black</p>		<p>Cable length 0,5 m Cable length 0,8 m Cable length 0,9 m Cable length 1,0 m Cable length 1,5 m Cable length 2,0 m Cable length 2,5 m Cable length 3 m Cable length 4 m Cable length 5 m</p>	<p>6590 0700 5500 6590 0700 8500 6590 0700 9500 6590 0701 0500 6590 0701 5500 6590 0702 0500 6590 0702 5500 6590 0703 0500 6590 0704 0500 6590 0705 0500</p>
<p><b>Express cable</b></p> <p>Freely configurable cable, Plug and socket.</p>		<p><b>Cable:</b></p> <p>black 3 x 1,5 mm<sup>2</sup> (minimum 0,2 m) Cable extension (per 0.1 m)</p> <p>black 3 x 2,5 mm<sup>2</sup> (minimum 0,2 m) Cable extension (per 0.1 m)</p> <p>red 3 x 1,5 mm<sup>2</sup> (minimum 0,2 m) Cable extension (per 0.1 m)</p> <p>white 3 x 1,5 mm<sup>2</sup> (minimum 0,2 m) Cable extension (per 0.1 m)</p>	<p>9331 7920 0000  9331 8720 0000  9331 7930 0000  9331 9070 0000</p>
		<p><b>Plug:</b></p> <p>Powered by GST18 (black)</p> <p>Powered by GST18 (white)</p> <p>Powered by GST15 (Mini) (black)</p>	<p>9331 7940 0000 9331 9850 0000 9332 6150 0000</p>
		<p>WAGO WINSTA MIDI (black)</p> <p>WAGO WINSTA MIDI (white)</p>	<p>9331 7950 0000 9331 9080 0000</p>

Description	Picture	Specifications	Order Number
		PlugFix (black)	9332 4740 0000
		PlugFix (white)	9332 1630 0000
		PlugMiniFix (black)	9332 7220 0000
		PlugMiniFix (white)	9332 7210 0000
		Plug Great Britain 13 A	9332 3620 0000
		Plug Switzerland 10 A	9332 2620 0000
		Plug Switzerland 16 A	9332 0800 0000
		Reset-Plug Switzerland 10 A	9332 1430 0000
		Plug Italy	9332 4320 0000
		<b>Socket:</b>	
		Powered by GST18 (black)	9331 7960 0000
		Powered by GST18 (white)	9331 9860 0000
		Powered by GST15 (Mini) (black)	9332 6160 0000
		WAGO WINSTA MIDI (black)	9331 7970 0000
		WAGO WINSTA MIDI (white)	9331 9090 0000
<b>Express Connectors</b>		<b>Plug:</b>	
Separat, without cable.		Powered by GST18	1599 0907 7000
		WAGO WINSTA MIDI	1599 0910 9500
		<b>Socket:</b>	
		Powered by GST18	1599 0905 9000
		WAGO WINSTA MIDI	1599 0910 9600

Description	Picture	Specifications	Order Number
<p>Distributor Powered by GST18</p> <p>250 V, 20 A Input: Plug 3-pole</p>		<p>2x Output: Connector 3-pole Flat Shape with Lock without Mounting clip</p>	6599 0906 8300
		<p>2x Output: Connector 3-pole T-Shape with Lock without Mounting clip</p>	6599 0905 2200
		<p>2x Output: Connector 3-pole h-Shape with Lock without Mounting clip Plug directly into Express sockets</p>	6599 0911 3000
		<p>3x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7000
		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7100
<p><b>Distributor</b> <b>Powered by GST15 (Mini)</b></p> <p>250 V, 16 A Input: Plug 3-pole</p>		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0912 7300
<p><b>Y-Cable Distributor</b> <b>Powered by GST18</b></p> <p>1x Input, Plug 3-pole, Powered by GST18</p>		<p>2x Output, Connector 3-pole, Powered by GST18 with Lock without Mounting clip Lenght: 300 mm</p>	6599 0906 6600

Description	Picture	Specifications	Order Number
<p><b>Installation connector with Euro coupling</b></p>		<p>1x input: plug 1x output: socket 3-pole with locking device 1x Euro socket with 80 mm cable</p>	6599 0913 2100
<p><b>Distributor WAGO WINSTA</b></p> <p>250 V, 25 A Input: Plug 3-pole</p>		<p>2x Output: Connector 3-pole T-Shape with Lock without Mounting clip</p>	6599 0906 9100
		<p>2x Output: Connector 3-pole h-Shape with Lock with Mounting plate</p>	1599 0911 7600
		<p>3x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7300
		<p>5x Output: Connector 3-pole with Lock with Mounting plate</p>	1599 0911 7400

Description	Picture	Specifications	Order Number
<p><b>Rail</b></p> <p>For under desk installation, for the Express range. Black plastic brackets. Black aluminium profiles</p>		<p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 165 mm (for 3 gang)</p> <p>Profile length 215 mm (for 4 gang)</p>	<p>1593 5400 0300</p> <p>1593 5400 0400</p>
		<p><b>Individual</b></p> <p>1 black plastic brackets for Express</p>	<p>9331 6230 0000</p>
		<p>1 pair of Aluminium profiles per 100 mm</p>	<p>9331 6210 0000</p>

Description	Picture	Specifications	Order Number
<p><b>Cover cap for Express</b></p> <p>for screw holes (suitable for Express type 901 and 910)</p>		<p>Housing colour black</p> <p>Housing colour red</p> <p>Housing colour green</p>	<p>1591 1830 0400</p> <p>1591 1830 0500</p> <p>1591 1830 0700</p>
<p><b>Express Module Connector</b></p> <p>for a safe connection of plugged modules (for Express 901/910)</p>		<p>black</p> <p>red</p>	<p>1591 1830 0100</p> <p>1591 1830 0200</p>
<p><b>Interlock Powered by GST18</b></p> <p>two parts, can be released by hand without tools, for flying socket- plug connections between two cables, must not be used for fixed installations.</p>		<p>black</p>	<p>1599 0911 7700</p>
<p><b>Express Interlock Powered by GST18</b></p> <p>Free cable connections snap-on for jacks or suitable plugs. According to approvals a locking must be provided.</p>		<p>black</p>	<p>1599 0909 6700</p>
<p><b>Express Closure Cap Powered by GST18</b></p> <p>To cover unassigned connectors</p>		<p>black</p>	<p>1599 0901 9400</p>





EVoline<sup>®</sup>  
AFSA 6000

APSA 6000

## Die robuste Steckdosenleiste für Montagetische

Die APSA 6000er Serie wurde für den Einsatz in Industriebetrieben, Handwerksbetrieben, Büros und Schulen konzipiert. Die Grundform besteht aus einem sehr stabilen Aluminiumprofil. Neben zahlreichen Standardvarianten, kann die Anschlussleiste auch individuell konfiguriert werden. Durch die oktagonale Form der Endkappen, ist die 6000er Serie Steckdosenleiste besonders einfach an technischen Arbeitsplätzen zu montieren. Sie ist in vielen verschiedenen Varianten erhältlich. Ein optionaler, stirnseitiger Schalter am Kopfende ermöglicht beispielsweise das einfache Ein- und Ausschalten einer unter dem Tisch befestigten Anschlussleiste. Das Anschlusskabel der 6000er Serie lässt sich durch die Form der Endkappen einfach aufwickeln, bis die Mehrfachsteckdose zum Einsatz kommt.


APSA 6000

## The robust socket strip for assembly tables


The APSA 6000 was specially designed for use in industrial and craft businesses, offices and schools. The basic shape consists of a very stable aluminium profile. In addition to numerous standard versions, the connector strip can also be configured individually. Thanks to the shape of the end caps the APSA 6000 socket strip is particularly easy to install in technical workplaces. An optional switch on the front end at the head end enables, for example, the simple switching on and off of a connection strip attached under the table. Due to the shape of the end caps, the APSA 6000 connection cable can be easily wound up until the multiple socket is used.

Lieferbare Farben


Available colours











Silber  
Silver



Schwarz  
Black

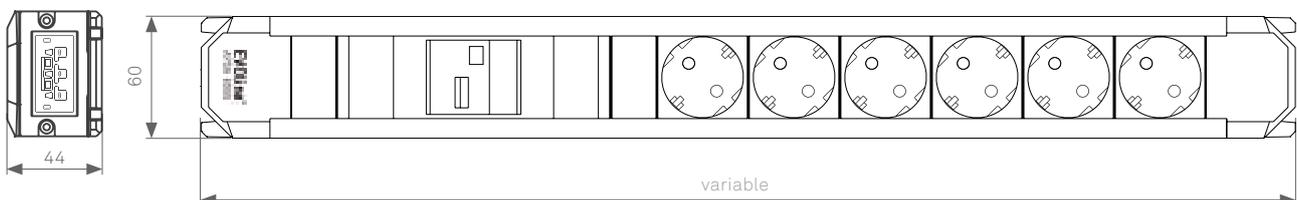

Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>APSA 6000</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug					
	3	262.0	si/bl	D6000.00003.02.020	1597 0600 0100
	3	262.0	bl/bl	D6000.00003.22.020	1597 0600 0200
					
	6	394.0	si/bl	D6000.00006.02.020	1597 0600 0300
	6	394.0	bl/bl	D6000.00006.22.020	1597 0600 0400
					
	9	526.0	si/bl	D6000.00009.02.020	1597 0600 0500
	9	526.0	bl/bl	D6000.00009.22.020	1597 0600 0600
					
	12	658.0	si/bl	D6000.00012.02.020	1597 0600 0700
	12	658.0	bl/bl	D6000.00012.22.020	1597 0600 0800
<b>APSA 6000 with switch</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the line input 2 m fixed mains cable with VDE angled plug					
	3	306.0	si/bl	D6000.00S03.02.020	1597 0600 0900
	3	306.0	bl/bl	D6000.00S03.22.020	1597 0600 1000
					
	6	438.0	si/bl	D6000.00S06.02.020	1597 0600 1100
	6	438.0	bl/bl	D6000.00S06.22.020	1597 0600 1200
					
	9	570.0	si/bl	D6000.00S09.02.020	1597 0600 1300
	9	570.0	bl/bl	D6000.00S09.22.020	1597 0600 1400
					
	12	702.0	si/bl	D6000.00S12.02.020	1597 0600 1500
	12	702.0	bl/bl	D6000.00S12.22.020	1597 0600 1600

si = silver / bl = black










<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour  
Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>APSA 6000 with circuit breaker</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A Circuit breaker, 2-pin, B characteristic 2 m fixed mains cable with VDE angled plug	6	526.0	si/bl	D6000.0LS06.02.020	1597 0600 1700
	6	526.0	bl/bl	D6000.0LS06.22.020	1597 0600 1800
<b>APSA 6000 with FI switch</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A FI switch 25 A, 30mA 2 m fixed mains cable with VDE angled plug	6	526.0	si/bl	D6000.0FI06.02.020	1597 0600 1900
	6	526.0	bl/bl	D6000.0FI06.22.020	1597 0600 2000
<b>APSA 6000 with connector powered by GST18</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A Input into the side cap connector powered by GST18	3	262.0	si/bl	D6002.00003.02.000	1597 0600 2100
	3	262.0	bl/bl	D6002.00003.22.000	1597 0600 2200
	6	394.0	si/bl	D6002.00006.02.000	1597 0600 2300
	6	394.0	bl/bl	D6002.00006.22.000	1597 0600 2400
	9	526.0	si/bl	D6002.00009.02.000	1597 0600 2500
	9	526.0	bl/bl	D6002.00009.22.000	1597 0600 2600
	12	658.0	si/bl	D6002.00012.02.000	1597 0600 2700
	12	658.0	bl/bl	D6002.00012.22.000	1597 0600 2800
<b>APSA 6000 with WAGO WINSTA connector and switch</b>					
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the line input Input into the side cap WAGO WINSTA connector	6	438.0	si/bl	D6005.00S06.02.000	1597 0600 6500







si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number	
<b>APSA 6000 with connector powered by GST18 and switch</b>						
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, at the line input Input into the side cap connector powered by GST18		3	306.0	si/bl	D6002.00S03.02.000	1597 0600 2900
		3	306.0	bl/bl	D6002.00S03.22.000	1597 0600 3000
		6	438.0	si/bl	D6002.00S06.02.000	1597 0600 3100
		6	438.0	bl/bl	D6002.00S06.22.000	1597 0600 3200
		9	570.0	si/bl	D6002.00S09.02.000	1597 0600 3300
		9	570.0	bl/bl	D6002.00S09.22.000	1597 0600 3400
		12	702.0	si/bl	D6002.00S12.02.000	1597 0600 3500
		12	702.0	bl/bl	D6002.00S12.22.000	1597 0600 3600
<b>APSA 6000 with switch</b>						
Multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch green, frontal opposite the line input, switch code: 2S 2 m fixed power cord with VDE angled plug		3	328.0	si/bl	D6000.02S03.02.020	1597 0600 3700
		3	328.0	bl/bl	D6000.02S03.22.020	1597 0600 3800
		6	460.0	si/bl	D6000.02S06.02.020	1597 0600 3900
		6	460.0	bl/bl	D6000.02S06.22.020	1597 0600 4000
		9	592.0	si/bl	D6000.02S09.02.020	1597 0600 4100
		9	592.0	bl/bl	D6000.02S09.22.020	1597 0600 4200
		12	724.0	si/bl	D6000.02S12.02.020	1597 0600 4300
		12	724.0	bl/bl	D6000.02S12.22.020	1597 0600 4400

si = silver / bl = black

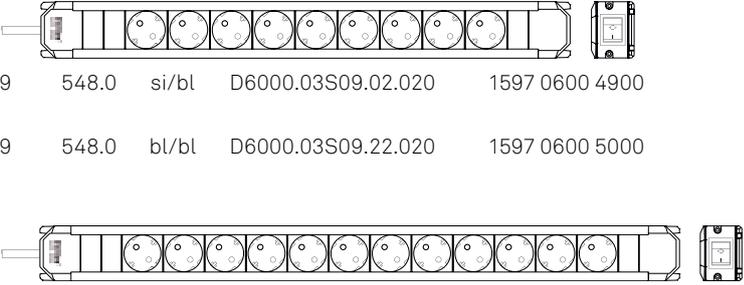Description	Sockets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>APSA 6000 with switch at the front end</b>					
<p>Multiple socket strip made of anodised aluminium VDE sockets, 16 A</p> <p>2-pin illuminated switch green, at the front end opposite the line input, switch code: 3S</p> <p>2 m fixed power cord with VDE angled plug</p>					
	3	284.0	si/bl	D6000.03S03.02.020	1597 0600 4500
	3	284.0	bl/bl	D6000.03S03.22.020	1597 0600 4600
	6	416.0	si/bl	D6000.03S06.02.020	1597 0600 4700
	6	416.0	bl/bl	D6000.03S06.22.020	1597 0600 4800
	9	548.0	si/bl	D6000.03S09.02.020	1597 0600 4900
9	548.0	bl/bl	D6000.03S09.22.020	1597 0600 5000	
					
12	680.0	si/bl	D6000.03S12.02.020	1597 0600 5100	
12	680.0	bl/bl	D6000.03S12.22.020	1597 0600 5200	
<b>APSA 6000 with 2 switches and 2 switched circuits</b>					
<p>Multiple socket strip made of anodised aluminium VDE sockets, 16 A</p> <p>2-pin illuminated switch red, for red sockets</p> <p>2-pin illuminated switch green, for green sockets</p> <p>2 m fixed mains cable with VDE angled plug</p>					
	2 + 2	438.0	bl/bl	D6.Sg2Sr2.221312.020	1597 0600 5300
					
3 + 3	526.0	bl/bl	D6.Sg3Sr3.221312.020	1597 0600 5400	
<b>APSA 6000 with 2 switches and 2 switched circuits</b>					
<p>Multiple socket strip made of anodised aluminium VDE sockets, 16 A</p> <p>2-pin illuminated switch red, for red sockets</p> <p>2-pin illuminated switch green, for green sockets</p> <p>2 m fixed mains cable with VDE angled plug</p>					
	2 + 2	438.0	bl/bl	D6.Sg2Sg2.220202.020	1597 0600 5500
					
3 + 3	526.0	bl/bl	D6.Sg3Sg3.220202.020	1597 0600 5600	

si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.



# EVoline® APSA 7000

APSA 7000

## Steckdosenleiste für Serverschränke

Die APSA 7000 ist speziell für den Einbau in 19" Serverschränken entwickelt. Die Möglichkeit des horizontalen und vertikalen Einbaus macht sie mit einem Platzbedarf von einer Höheneinheit (1HE=44,5 mm) zu einer im Server Rack idealen, universell montierbaren Anschlussleiste. Freie Konfigurationen lassen u.a. Schutzkontakt-Steckdosen in unterschiedlichen Farben, Kaltgerätesteckdosen, 2-polig beleuchtete Schalter, Schutzschalter uvm. zu.

Ein Set mit zwei Befestigungswinkeln und acht Schrauben ist im Lieferumfang bereits enthalten. Ein spezieller Drehwinkel, welcher ohne Schrauben zu lösen ist und jederzeit per Knopfdruck in eine andere 90° Position gedreht werden kann, ist optional erhältlich.



APSA 7000

## Server cabinet connectivity


The APSA 7000 has been specially developed for installation in 19" server racks. The possibility of horizontal or vertical installation means that it takes up space from one height unit (1HU) to an ideal, universally mountable connector strip in the server rack. The APSA 7000 is available in many different versions. This includes options in black or grey, with protective contact sockets in different colours, cold device sockets or with 2-pin switches and circuit breakers.

The scope of delivery of the APSA 7000 always includes a set with two fixing brackets and eight screws. Alternatively, a rotation angle is also available, which, without loosening screws, can be turned into another 90° position at any time at the touch of a button.




Lieferbare Varianten


Available surfaces



Silber  
Silver






Schwarz  
Black

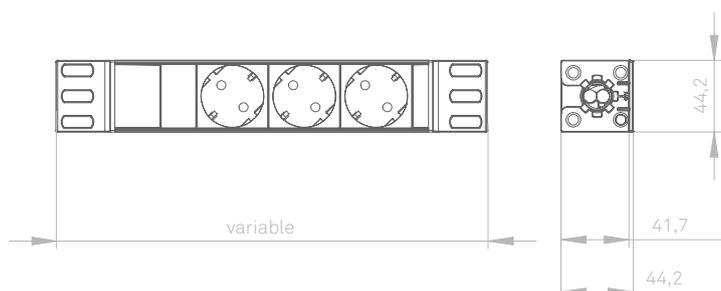

Description	Angle	Sock-ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>APSA 7000 VDE</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7000.00007.03.020	1597 0700 0100
	L	7	482.6	bl/bl	D7000.00007.22.020	1597 0700 0300
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	8	482.6	si/gr	D7000.00008.03.020	1597 0700 0200
	L	8	482.6	bl/bl	D7000.00008.22.020	1597 0700 0400
<b>APSA 7000 VDE</b>						
20,7" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	9	526.6	si/gr	D7000.00009.03.02052	1597 0700 0500
	L	9	526.6	bl/bl	D7000.00009.22.02052	1597 0700 0600
<b>APSA 7000 VDE with switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7000.00S07.03.020	1597 0700 0700
	L	7	482.6	bl/bl	D7000.00S07.22.020	1597 0700 0800
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	S	8	482.6	si/gr	D7000.00S08.03.020	1597 0700 0900
	S	8	482.6	bl/bl	D7000.00S08.22.020	1597 0700 1000
<b>APSA 7000 VDE with circuit breaker</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A Circuit breaker, 2-pin, B characteristic 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	5	482.6	si/gr	D7000.0LS05.03.020	1597 0700 1100
	L	5	482.6	bl/bl	D7000.0LS05.22.020	1597 0700 1200

L = long / S = short / gr = grey / si = silver / bl = black



<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour  
Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Angle	Sock-ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>APSA 7000 VDE with FI switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A FI switch 25 A 30mA type A, 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	5	482.6	si/gr	D7000.0FI05.03.020	1597 0700 1300
	L	5	482.6	bl/bl	D7000.0FI05.22.020	1597 0700 1400
						
<b>APSA 7000 VDE with FI/LS switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A FI/LS switch 16 A, 30mA 2 m fixed mains cable with VDE angled plug incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	5	482.6	si/gr	D7000.0FL05.03.020	1597 0700 1500
	L	5	482.6	bl/bl	D7000.0FL05.22.020	1597 0700 1600
						
<b>APSA 7000 VDE with connector powered by GST18</b>						
19 multiple socket strip made of anodised aluminium VDE sockets, 16 A Infeed on the frontal connector powered by GST18 incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	7	482.6	si/gr	D7002.00007.03.000	1597 0700 1700
	L	7	482.6	bl/bl	D7002.00007.22.000	1597 0700 1800
						
<b>APSA 7000 VDE with connector powered by GST18 and switch</b>						
19" multiple socket strip made of anodised aluminium VDE sockets, 16 A 2-pin illuminated switch red Infeed on the frontal connector powered by GST18 incl. 2 mounting brackets and 8 Phillips screws PZ 1	L	6	482.6	si/gr	D7002.00S06.03.000	1597 0700 1900
	L	6	482.6	bl/bl	D7002.00S06.22.000	1597 0700 2000
						

L = long / S = short / gr = grey / si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Angle	Sock-ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
<b>APSA 7000 VDE with IEC connector C14</b>						
						
19" multiple socket strip made of anodised aluminium	L	7	482.6	si/gr	D7003.00007.03.000	1597 0700 2100
VDE sockets, 16 A	L	7	482.6	bl/bl	D7003.00007.22.000	1597 0700 2200
Infeed on the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1						
<b>APSA 7000 VDE with IEC connector C14 and switch</b>						
						
19" multiple socket strip made of anodised aluminium	L	6	482.6	si/gr	D7003.00S06.03.000	1597 0700 2300
VDE sockets, 16 A	L	6	482.6	bl/bl	D7003.00S06.22.000	1597 0700 2400
2-pin illuminated switch red Infeed at the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1						
<b>APSA 7000 IEC connector C13 with IEC connector C14</b>						
						
19" multiple socket strip made of anodised aluminium	L	9	482.6	si/bl	W7302.00009.02.000	1597 0700 3300
IEC connector sockets C13, 10 A	L	9	482.6	bl/bl	W7302.00009.22.000	1597 0700 3400
Infeed on the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1						
<b>APSA 7000 IEC connector C13 with IEC connector C14 and switch</b>						
						
19" multiple socket strip made of anodised aluminium	L	9	482.6	si/bl	W7302.00S09.02.000	1597 0700 3500
IEC connector C13, 10 A	L	9	482.6	bl/bl	W7302.00S09.22.000	1597 0700 3600
2-pin illuminated switch red Infeed at the frontal C14, 10 A IEC connector incl. 2 mounting brackets and 8 Phillips screws PZ 1						


L = long / S = short / gr = grey / si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.

Description	Angle	Socket- ets	Length <sup>1</sup> [mm]	Colour <sup>2</sup>	APSA-ID	Order number
-------------	-------	----------------	-----------------------------	---------------------	---------	--------------


**APSA 7000 IEC connector sockets C19/16A**



19" multiple socket strip  
made of anodised aluminium  
IEC connector C19, 16 A  
2 m fixed mains cable with  
VDE angled plug  
incl. 2 mounting brackets  
and 8 Phillips screws PZ 1

L	6	482.6	si/bl	W9000.00006.02.000	1597 0700 3700
---	---	-------	-------	--------------------	----------------

**APSA 7000 IEC connector C19/16A with IEC connector C20/16A**



19" multiple socket strip  
made of anodised aluminium  
IEC connector sockets C19, 10 A  
Infeed on the frontal C20, 16 A IEC connector  
incl. 2 mounting brackets  
and 8 Phillips screws PZ 1

L	5	482.6	si/bl	W9001.00005.02.000	1597 0700 3900
---	---	-------	-------	--------------------	----------------

**APSA Cage nut set**

For installing the 7000 socket strips  
in server cabinets.  
4 pieces per set



9450 0000 3400
----------------

L = long / S = short / gr = grey / si = silver / bl = black

<sup>1</sup> The length describes total profile length including the mounting brackets | <sup>2</sup> Profile colour / socket colour

Contents subject to printing errors, rights reserved to implement technical/price changes at any time | Photo images indicative only.



# EVoline® WirelessCharger

QCharger


## Unsichtbares Handyaufladen

Mit dem QCharger können sämtliche wirelessfähigen Geräte geladen werden. Der Einbau erfolgt entweder unter dem Tisch bzw. der Arbeitsfläche, so dass die Ladestation unsichtbar ist, oder als Einsatz für Standardöffnungen von Ø 80 mm. Das zu ladende Gerät wird einfach mittig auf die entsprechende Stelle gelegt – Minimalismus pur.

QCharger

## Wireless Charging

All wireless-compatible devices can be charged with the QCharger. It is installed either under the table or worktop - so that the charging station is invisible - or as an insert for standard openings of Ø 80 mm. The device to be charged is simply placed in the appropriate place - pure minimalism.



DisQ

## Komfortables induktives Laden

Der DisQ lädt alle Geräte, die Wireless Charging unterstützen, mit einer Leistung von bis zu 15 Watt. Durch den integrierten Magneten haftet der DisQ an kompatiblen Endgeräten und sorgt für die perfekte Positionierung zur Ladespule.

DisQ


## Wireless Inductive Charging

The DisQ charges all devices that support wireless charging with a power of up to 15 watts. Thanks to the integrated magnet the DisQ adheres to compatible devices and ensures perfect positioning in relation to the charging coil.



Der DisQ lädt neben sämtlichen Wireless Charging Geräten auch die Apple Watch.

In addition to all wireless charging devices, the DisQ also charges the Apple Watch.

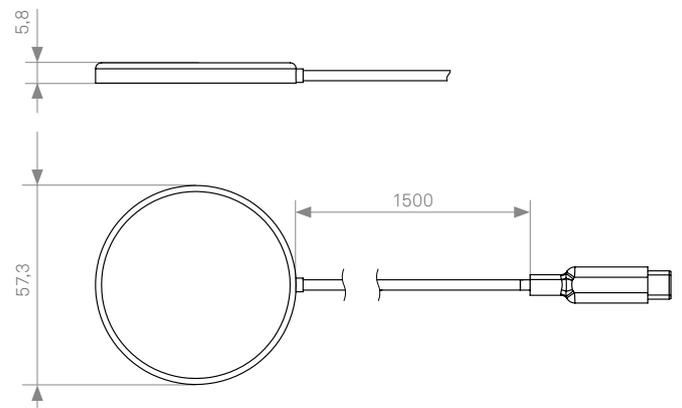

Für die Funktion ist ein separates Steckernetzteil mit USB-C Anschluss nötig.

A separate plug-in power supply with USB-C connection is required for the function.



# EVoline® Wireless Charger

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

## QCharger

Wireless charger for integration into the table worktop or for installation in openings Ø 80 mm.

Thanks to the integrated magnet, suitable devices connect and centre themselves and the charging process starts immediately.

Power consumption:

5 V / 2 A; 9 V / 2.22 A

Power output (inductive):

max. 15 W

Protective functions:

Overvoltage, overcurrent, short circuit, temperature

Compatibility: WPC Qi2.0

1.5 m cable black, with USB C plug and USB C power supply unit



USB power supply with Euro plug

1599 0911 2800

USB power supply with universal connector set (US, EU, AU/CN, UK)

1599 0912 3800

## DisQ

Wireless charger with fabric-covered cable.

Thanks to the integrated magnet, suitable devices connect and centre themselves and the charging process begins immediately.

In: DC 5 V / 3 A

DC 9 V / 2 A

Out: max. 15 W

1.5 m cable black, with USB C plug, without power supply unit

Diameter: 58 mm

Height: 6 mm



1599 0912 9400

## Wireless charging via induction

- inductive coupling between transmitter (charging station) and receiver (mobile phone)
- vendor independent, charges devices with inductive charging function (the unit must be placed centrally and flat over the coil).
- transmitter coil is active only when a connection to the receiving device is made
- Please note: The charging function may be impaired by covers or protruding housing parts (e.g. cameras).





reddot design award  
winner 2011



Ausgezeichnet mit dem 1. Preis  
Universal Home: Product Design  
Designpreis des Landes  
Nordrhein-Westfalen



Designpreis  
Deutschland  
2011  
NOMINIERT



interior  
innovation  
award  
2011  
Winner



Ausgezeichnet mit der  
IENA Goldmedaille



universal  
design  
award 2010  
universal  
design  
consumer  
favorite 2010



DOBRY  
WZÓR  
2012



Plug / PlugMini / Plug Fix / PlugMini Fix

## Beweglicher Stecker verhindert Stolperfallen

Der extraflache Plug passt spielend hinter jedes Möbelstück. Seine intelligente Gelenkmechanik macht das Griffteil zum Hebel – so lässt sich der Stecker ohne Kraftaufwand aus der Steckdose lösen. Selbst bei einem Ruck am Kabel kommt der Stecker ohne Beschädigung frei. Für seine smarte Ergonomie und minimalistische Gestaltung wurde der Plug mit zahlreichen Preisen ausgezeichnet.

Plug / PlugMini / Plug Fix / PlugMini Fix


## Hinged plug - Increased trip prevention

The extra-flat Plug easily fits behind every piece of furniture. Its intelligent hinge mechanism turns the grip into a lever - this way the plug can be removed from the socket without the use of force. Even if the cable is jerked, the plug is released without damage. The Plug has received numerous awards for its smart ergonomics and minimalist design.


Looser Stecker zum Anschluss an 3-adrige Kabel.

*Loose plug, for connection to 3 wire cable.*

Plug

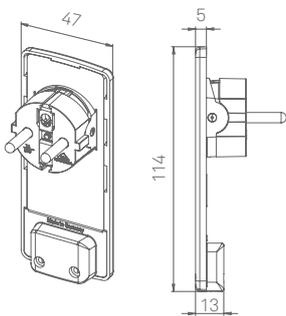


PlugMini

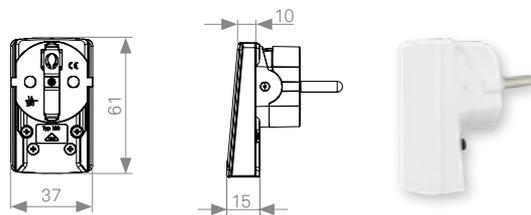


Mit installiertem Kabel und Kupplung oder Mehrfachsteckdose.

*With installed cable and coupling or multiple socket.*


Plug Fix

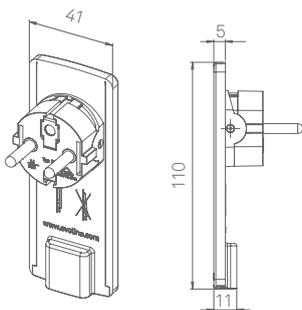

PlugMini Fix

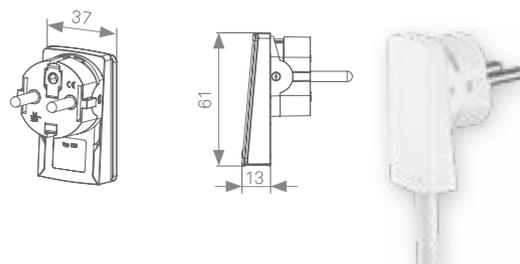

# EVoline® Plug | Plug Fix | PlugMini | PlugMini Fix

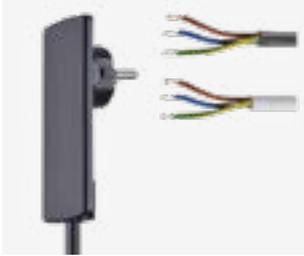Description	Picture	Specifications	Order Number
<p><b>Plug</b></p> <p>Screwable ultra-low profile grounded plug with movable face, for wire diameters of 0.75 mm<sup>2</sup> to 1.5 mm<sup>2</sup>, 250 V / 16 A</p>		<p>black</p> <p>white</p>	<p>1510 0000 0100*</p> <p>1510 0000 0300*</p>
<p><b>PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm<sup>2</sup> connected to 3 gang power bar Express, 250 V / 16 A</p>		<p>black, with 1.5 m cable</p> <p>white, with 1.5 m cable</p>	<p>1510 0015 6100*</p> <p>1510 0015 6300*</p>
<p><b>PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm<sup>2</sup> connected to socket coupling with contact protection, 250 V / 16 A</p>		<p>black, with 3 m cable</p> <p>black, with 1.5 m cable</p> <p>white, with 3 m cable</p> <p>white, with 1.5 m cable</p>	<p>1510 0030 5100*</p> <p>1510 0015 5100*</p> <p>1510 0030 5300*</p> <p>1510 0015 5300*</p>
<p><b>PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with cable 3 × 1.5 mm<sup>2</sup> and connector.</p>		<p>Socket connector black 1.5 m cable and socket</p> <p>WAGO WINSTA black 1.5 m cable and socket</p>	<p>1510 0015 2100*</p> <p>1510 0015 8100*</p>
<p><b>PlugFix</b></p> <p>Ultra-low profile grounded plug with movable face, with Fix</p>		<p>black, with 1.5 m cable</p> <p>white, with 1.5 m cable</p>	<p>1510 0015 1100*</p> <p>1510 0015 1300*</p>

Description	Picture	Specifications	Order Number
<p><b>PlugMini</b></p> <p>Connector type E + F 16 A, 3 x 1.5 mm<sup>2</sup> e.g. Germany Extra small and ultra-low profile grounded plug with movable face.</p>		<p>black</p> <p>white</p>	<p>1513 0000 0100*</p> <p>1513 0000 0300*</p>
<p><b>PlugMiniFix</b></p> <p>Connector type E + F 16 A, 3 x 1.5 mm<sup>2</sup> e.g. Germany Extra small and ultra-low profile grounded plug with movable face.</p>		<p>black, with 1.5 m cable</p> <p>white, with 1.5 m cable</p> <p>Powered by GST18, black, 1.5 m cable and socket</p>	<p>1512 0015 1100*</p> <p>1512 0015 1300*</p> <p>1512 0015 2100*</p>

**\*Minimum order quantity: 20 piece**



# EVOLine® Modules

EVOLine Module

## **Modular für maximale Konfigurierbarkeit**

Unsere Profile können ganz nach Ihren Wünschen frei konfiguriert werden. Dafür stehen eine Vielzahl an Modulen zur Verfügung. Wir bieten dafür eine breite Auswahl internationaler Steckdosen, Daten-, Multimedia- und Schutzmodule sowie Schalter und Taster an.

EVOLine Modules

## **Modular for maximum configurability**

Our profiles can be freely configured according to your requirements. A large number of modules are available for this purpose. We offer a wide selection of international sockets, data, multimedia and protection modules as well as switches and push-buttons.



Wechselcharger 27 oder 65 W

## **Strom Wechselmodule**

Der Wechselcharger mit USB-C-Anschluss (27W oder 65W) ist ideal für jegliche Büros und öffentliche Bereiche wie Schulen, wo Geräte regelmäßig ein- und ausgesteckt werden. Bei Bedarf wird er einfach mit dem mitgelieferten Entriegelungswerkzeug ausgebaut und eine neue Chargereinheit eingesetzt. Nach dem Austausch können Sie den neuen Wechselcharger sofort wieder nutzen. Das Modul passt in alle EVOLine Profile. Wählen Sie zwischen elegantem Schwarz oder zeitlosem Weiß, um Ihren individuellen Bedürfnissen gerecht zu werden.

Interchangeable charger 27 or 65 W

## **Power exchange modules**

The interchangeable charger with USB-C connection (27W or 65W) is ideal for any offices and public areas such as schools where devices are regularly plugged in and unplugged. If required, it is simply removed using the unlocking tool supplied and a new charger unit inserted. After replacement, you can use the new interchangeable charger again immediately. The module fits into all EVOLine profiles. Choose between elegant black or timeless white to suit your individual requirements.

50mm Wechselmodule

## **Daten und Multimedia Wechselmodule**

Ihre Nutzungsansprüche sind so flexibel wie Sie selbst. Sollten sich die Nutzungsanforderungen am Arbeitsplatz mit der Zeit verändern, können Datenmodule und Kabel ausgetauscht werden, ohne dass die Steckdosenleiste zuvor ausgebaut werden muss. Natürlich können Sie die Module auch zwischen den Profilen austauschen. Zur Verfügung stehen Ihnen verschiedene Kabeldurchlässe, Taster, Multimediaanschlüsse wie USB oder HDMI.

50mm interchangeable modules

## **Data and multimedia interchangeable modules**

Your utilisation requirements are as flexible as you are. Should requirements at the workplace change over time, data modules and cables can be replaced without having to remove the socket strip beforehand. Of course, you can also swap the modules between the profiles. At your disposal are various cable outlets, push-buttons, multimedia connections such as USB or HDMI.




# EVOLine® Sockets



The chart below gives an overview about country specific socket versions. Deviations may occur.


**Socket VDE (CEE 7/3)**  
230 V, 16 A



Plug Type  
F, E+F, C

Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Croatia, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine


**Socket (CEE 7/5)**  
230 V, 16 A



Plug Type  
E, E+F, C

France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia


**Socket (BS 1363)**  
230 V, 3,15 A oder 5 A



Plug Type  
G

Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe


**Socket (SEV 1011)**  
230 V, 10 A, T13



Plug Type  
J, C

Switzerland, Liechtenstein

**Socket (SEV 1011)**  
230 V, 16 A, T23



Plug Type  
J, C

Switzerland, Liechtenstein

**Socket (DS 608842-D1)**  
230 V, 13 A



Plug Type  
K, C

Denmark, Greenland


**Socket (CEI 23-16-VII)**  
230 V, 16 A oder 10 A



Plug Type  
L, C

Italy, Chile, Cuba

**Socket (AS 3112)**  
230 V, 10 A



Plug Type  
I

Australia, New Zealand, Papua New Guinea, several Pacific Islands


**Socket (NEMA 5-15)**  
120 V, 15 A



Plug Type  
B

USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Caribbean Islands

\* Power modules are only available completely assembled in products.

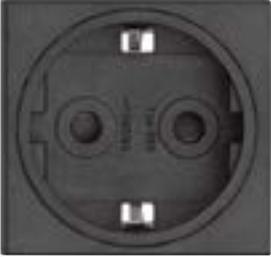Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTopPush / FrameDock / One / Port / PortPush / U- & V-Dock / Up /																								
<p><b>Socket 0°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 0090 0000 black - black</p> <p>9330 0200 0000 black - red</p> <p>9330 5450 0000 black - white</p> <p>9331 7560 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
<p><b>Socket 0°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 8130 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)</p>	<table border="1"> <tr> <td>•</td><td></td><td></td><td></td><td></td><td></td> </tr> </table>	•																							
•																											
<p><b>Socket 60°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1050 0000 black - black</p> <p>9330 1430 0000 black - red</p> <p>9330 5460 0000 black - white</p> <p>9332 3700 0000 white - white</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
•	•	•	•	•	•																						
<p><b>Socket 90°, 16 A</b> <b>Contact-protected, VDE</b></p> <p>for plug type: F, C, E+F</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1260 0000 black - black</p> <p>9330 1500 0000 black - red</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•												
•	•	•	•	•	•																						
•	•	•	•	•	•																						

*/ Dock / R-Dock  
 / Dock Square  
 / FlipTop Push  
 / FlameDock  
 / One  
 / Port  
 / Port Push  
 / U- & V-Dock  
 / Up*

Description

Picture

Order Nr. & Specifications<sup>2</sup>

**Socket 0°, 16 A**  
**Contact-protected, FR/BE/PL**

France, Belgium, Poland  
for plug type: E, C, E+F

Installation dimensions: 50 x 50 mm,



9330 0250 0000  
black - black

9331 1810 0000  
black - white

9331 6920 0000  
white - white

**Socket 60°, 16 A**  
**Contact-protected, FR/BE/PL**

France, Belgium, Poland  
for plug type: E, C, E+F

Installation dimensions: 50 x 50 mm,



9330 1060 0000  
black - black

9332 1650 0000  
black - white

9332 2580 0000  
white - white

**Socket 0°, 10 A / 16 A**  
**Contact-protected, IT**

Italy  
for plug type: L, C

Installation dimensions: 25 x 50 mm



9331 3180 0000  
black

Dock / R-Dock	Dock Square	FlipTop Push	FlameDock	One	Port	Port Push	U- & V-Dock	Up
●	●	●	●			●	●	
●	●	●	●			●	●	
●	●	●	●			●	●	
●	●	●	●		●	●	●	●
●	●	●	●		●	●	●	●
●	●	●	●		●	●	●	●
●	●	●	●		●	●	●	●

<sup>2</sup> Specifications: frame colour - pot colour.  
Technical changes and printing errors reserved. | Similar pictures.  
Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /
<b>Socket 0°, 10 A</b> <b>without Contact-protection, CH</b>		9330 1100 0000 black - black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1480 0000 black - red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm		9331 9920 0000 white - white	● ● ● ● ● ●
<b>Socket 0°, 16 A</b> <b>without Contact-protection, CH</b>		9330 1010 0000 black - black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1710 0000 black - red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm		9332 1210 0000 white - white	● ● ● ● ● ●
<b>Socket 60°, 10 A</b> <b>without Contact-protection, CH</b>		9330 1110 0000 black - black	● ● ● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1490 0000 black - red	● ● ● ● ● ● ● ●
Installation dimensions: 50 x 50 mm			
<b>Socket 60°, 16 A</b> <b>without Contact-protection, CH</b>		9330 1070 0000 black - black	● ● ● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1450 0000 black - red	● ● ● ● ● ● ● ●
Installation dimensions: 50 x 50 mm			
<b>Socket 270°, 10 A</b> <b>without Contact-protection, CH</b>		9330 1280 0000 black - black	● ● ● ● ● ●
Switzerland for plug type: J, C		9330 1550 0000 black - red	● ● ● ● ● ●
Installation dimensions: 50 x 50 mm			

*/ Dock / R-Dock  
 / Dock Square  
 / FlipTop Push  
 / FrameDock  
 / One  
 / Port  
 / Port Push  
 / U- & V-Dock  
 / Up*

Description

Picture

Order Nr. & Specifications<sup>2</sup>

**Socket 270°, 16 A  
without Contact-protection, CH**

Switzerland  
for plug type: J, C

Installation dimensions: 50 x 50 mm



9330 1290 0000  
black - black

9330 1520 0000  
black - red

**Socket 0°, 13 A  
Contact-protected, DK**

Denmark, Standard  
for plug type: K, C

Installation dimensions: 50 x 50 mm



9330 1020 0000  
black - black

9332 1230 0000  
white - white

**Socket 60°, 13 A  
Contact-protected, DK**

Denmark, Standard  
for plug type: K, C

Installation dimensions: 50 x 50 mm



9330 1080 0000  
black - black

**Socket 240°, 13 A  
Contact-protected, DK**

Denmark, Standard  
for plug type: K, C


Installation dimensions: 50 x 50 mm




9330 7190 0000  
black - black

Dock / R-Dock	Dock Square	FlipTop Push	FrameDock	One	Port	Port Push	U- & V-Dock	Up
●	●	●				●	●	
●	●	●				●	●	
●	●	●	●	●		●	●	
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●

<sup>2</sup> Specifications: frame colour - pot colour.  
Technical changes and printing errors reserved. | Similar pictures.  
Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	<i>                     Dock / R-Dock                      Dock Square                      FlipTop Push                      FrameDock                      One                      Port                      Port Push                      U- &amp; V-Dock                      Up                 </i>
<b>Socket 0°, 13 A</b> <b>Contact-protected, GB</b>  Great Britain without fuse, for plug type: G  Installation dimensions: 50 x 50 mm		9332 0530 0000 black - black	● ● ● ● ● ● ● ● ● ●
		9332 2220 0000 white - white	● ● ● ● ● ● ● ● ● ●
<b>Socket 0°</b> <b>Contact-protected, GB</b>  Great Britain with integrated fuse for plug type: G  Installation dimensions: 50 x 50 mm		9332 0560 0000 black - black; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 2250 0000 white - white; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 0590 0000 black - black; 5 A	● ● ● ● ● ● ● ● ● ●
		9332 2280 0000 white white; 5 A	● ● ● ● ● ● ● ● ● ●
<b>Socket 45°, 13 A</b> <b>Contact-protected, GB</b>  Great Britain without fuse, for plug type: G  Installation dimensions: 50 x 50 mm		9332 0540 0000 black - black	● ● ● ● ● ● ● ● ● ●
		9332 2230 0000 white - white	● ● ● ● ● ● ● ● ● ●
<b>Socket 45°</b> <b>Contact-protected, GB</b>  Great Britain with integrated fuse for plug type: G  Installation dimensions: 50 x 50 mm		9332 0570 0000 black - black; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 2260 0000 white - white; 3,15 A	● ● ● ● ● ● ● ● ● ●
		9332 0600 0000 black - black; 5 A	● ● ● ● ● ● ● ● ● ●
		9332 2290 0000 white - white; 5 A	● ● ● ● ● ● ● ● ● ●

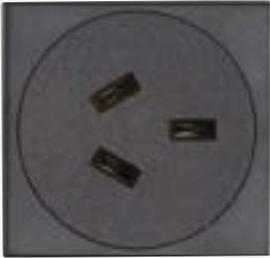

Description	Picture	Order Nr. & Specifications <sup>2</sup>	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTop Push</i> <i>/ FramePush</i> <i>/ OneDock</i> <i>/ Port</i> <i>/ PortPush</i> <i>/ U- &amp; V-Dock</i> <i>/ Up</i>
<p><b>Socket 0°, 10 A</b> <b>without Contact-protection, AUS</b></p> <p>Australia for plug type: I</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 5240 0000 black - black</p>	<p>• • • • • •</p>
<p><b>Socket 270°, 10 A</b> <b>without Contact-protection, AUS</b></p> <p>Australia for plug type: I</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 5890 0000 black - black</p>	<p>• • •</p>
<p><b>Socket 0°, 10 A Angled Outlet</b> <b>without Contact-protection, AUS</b></p> <p>Australia for plug type: I, Not suitable for angled plugs.</p> <p>Installation dimensions: 75 x 50 mm</p>		<p>9330 4010 0000 black - black</p>	<p>•</p>

*Dock / R-Dock  
 Dock Square  
 FlipTop Square  
 FlipTop Push  
 FrameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up*

Description

Picture

Order Nr. & Specifications<sup>2</sup>

**Socket 0°, 15 A  
with Contact-protection,  
USA/ CAN**

USA, Canada  
for plug type: B

Installation dimensions: 50 x 50 mm



9332 3640 6600  
black - black

**Socket 60°, 15 A  
with Contact-protection,  
USA/ CAN**

USA, Canada  
for plug type: B

Installation dimensions: 50 x 50 mm



9332 3650 6600  
black - black


**Socket 0°, 15 A  
Angled Outlet  
with Contact-protection and hinged  
lid, USA/CAN**

USA, Canada  
for plug type: B  
Not suitable for angled plugs.

Installation dimensions: 75 x 50 mm




9332 3630 6600  
black - black

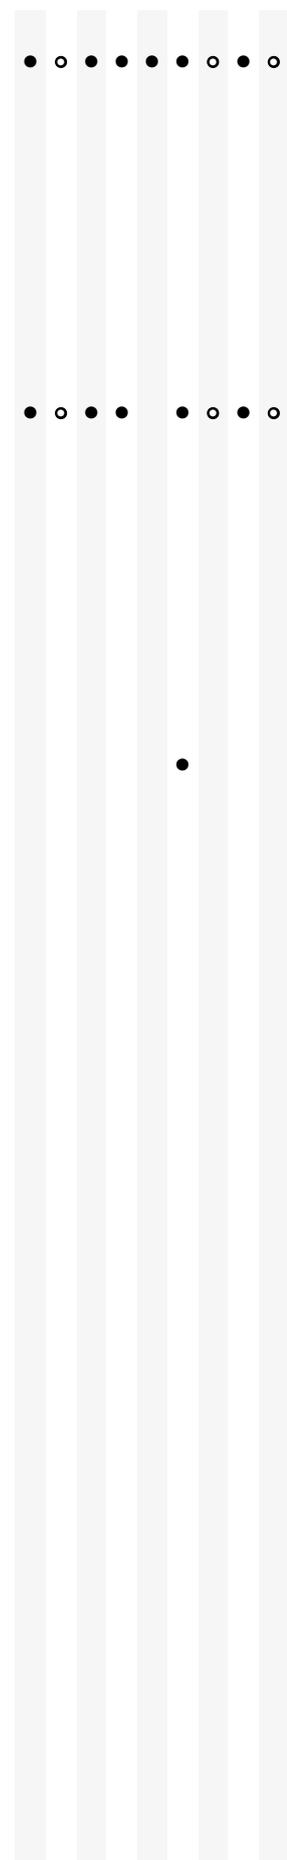

○ No UL-listed product. Feasibility to be enquired individually.

<sup>2</sup> Specifications: frame colour - pot colour.  
Technical changes and printing errors reserved. | Similar pictures.  
Power modules are only available completely assembled in EVOLine products.

Description	Picture	Order Nr. & Specifications <sup>2</sup>	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /																
<p><b>Connector 16 A</b></p> <p>Snap-In for current output</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>Powered by GST18 (socket) 9330 8990 0000 black</p> <p>WAGO WINSTA MIDI (socket) 9330 8970 0000 black</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●												
●	●	●	●	●	●	●	●												
<p><b>USB-A Charger</b></p> <p>USB Type A Charger, 5 V / 2,1 A; max 10,5 W charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 5460 0000 black or white</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												
<p><b>USB-C Charger</b></p> <p>USB Type C Charger, 5 V / 2,1 A; max 10,5 W charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 5470 0000 black or white</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												
<p><b>USB-AC Charger</b></p> <p>USB Type A and Type C Charger, 5 V / 3 A; 9 V / 2 A; max. 18 W. charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 5620 0000 black or white</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												
<p><b>USB-CC Charger</b></p> <p>USB Type C and Type C Charger, 5 V / 3 A; 9 V / 2 A; max. 18 W. charging function only. Supply voltage: 100-240 VAC</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 9010 0000 black or white</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 One  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description

Picture

Order Nr. & Specifications<sup>2</sup>

**USB-AC Charger 65 W**

USB socket, type A and type C, charging function only.

USB A QC 3.0 (Quick Charge) connection:  
 5 V / 3 A (15 W); 9 V / 2 A (18 W).  
 12 V / 1.5 A (18 W)

USB C PD (Power Delivery) connection:  
 5 V / 3 A (15 W); 9 V / 3 A (27 W).  
 12 V / 3 A (36 W); 15 V / 3 A (45 W);  
 20 V / 3.25 A (65 W)


Maximum total power, individually connected: 65 W

USB A + C:  
 5 V / 2.2 A (11 W) max.  
 maximum total power, double occupancy: 22 W

Overcharge, deep discharge, overload and short-circuit protection  
 Installation dimension 50 × 50 mm



9332 7320 0000  
 black

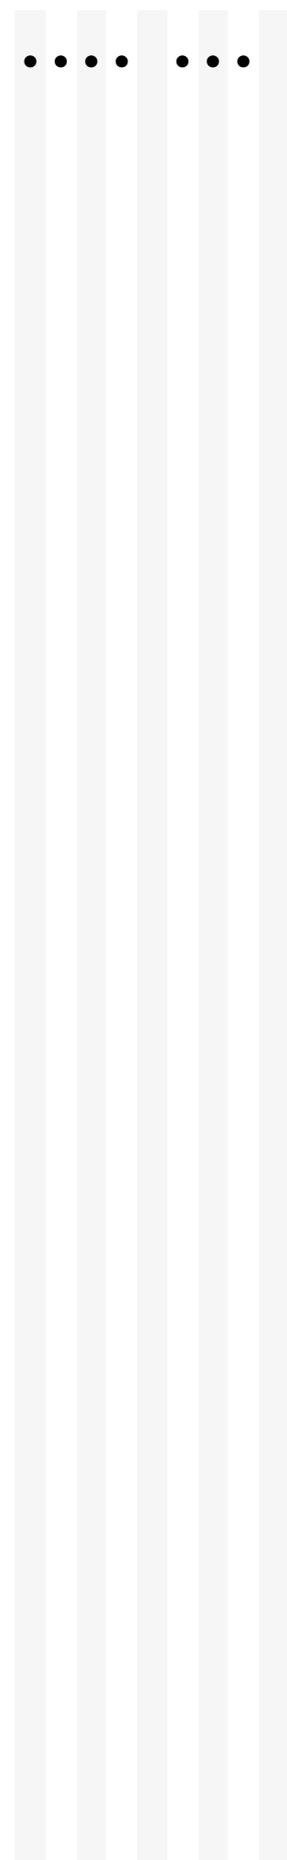


<sup>2</sup> Specifications: frame colour - pot colour.  
 Technical changes and printing errors reserved. | Similar pictures.  
 Power modules are only available completely assembled in EVOLine products.




Description	Picture	Order Nr. & Specifications <sup>2</sup>	<div style="writing-mode: vertical-rl; transform: rotate(180deg);">                     Dock / R-Dock                      Dock Square                      FlipTop Push                      FrameDock                      One                      Port                      Port Push                      U- &amp; V-Dock                      Up                 </div>
<p><b>USB-C interchangeable charger 27W</b></p> <p>USB socket, type C, charging function only.</p> <p>Charger can be replaced at any time using special tools.</p> <p>USB C PD (Power Delivery) connection:                      5 V / 3 A (15 W); 9 V / 3 A (27 W)                      12 V / 2,25 A (27 W);                      15 V / 1,8 A (27 W)</p> <p>Maximum total power: 27 W</p> <p>Supported charging protocols:                      USB C PD, QC4; USB C PD PPS</p> <p>Overcharge, deep discharge, overload and short-circuit protection                      Installation dimension 40 × 50 mm</p>		9332 8430 0000 black or white	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>USB-C interchangeable charger 65 W</b></p> <p>USB Buchse, Typ C, nur zur Stromversorgung/Ladung geeignet.</p> <p>Chargeraustausch durch Spezialwerkzeug jederzeit möglich.</p> <p>USB C PD (Power Delivery) Anschluss:                      5 V / 3 A (15 W); 9 V / 3 A (27 W)                      12 V / 3 A (36 W); 15 V / 3 A (45 W);                      20 V / 3 A (60 W)</p> <p>maximal Gesamtleistung: 65 W</p> <p>Unterstützte Ladeprotokolle:                      USB C PD, QC4; USB C PD PPS</p> <p>Overcharge, deep discharge, overload and short-circuit protection                      Installation dimension 75 × 50 mm</p>		9332 8440 0000 black or white	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>



# EVoline® Power supply modules

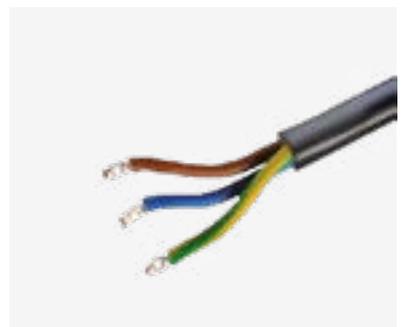

Installation example:  
Power supply module with cable,  
PlugMini Fix and branch with euro  
coupling, mounted on the One with  
extension module DisQ.  
With additional power supply unit.

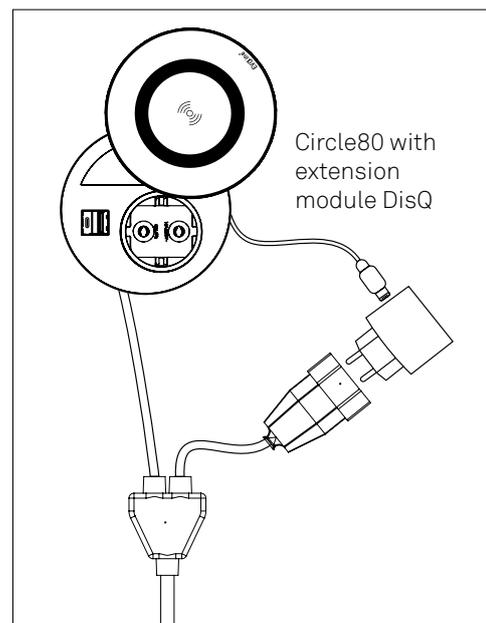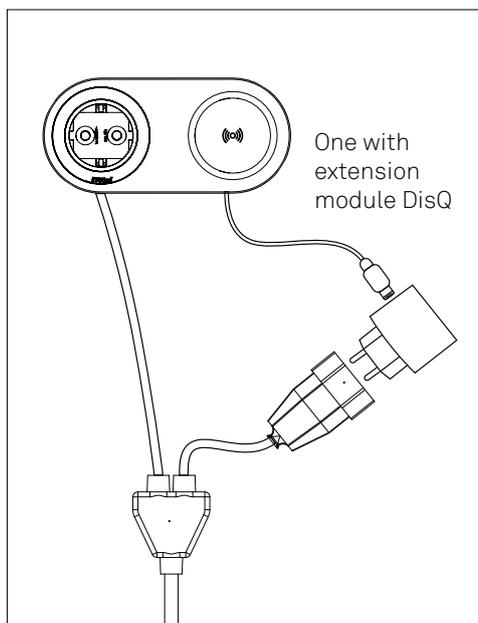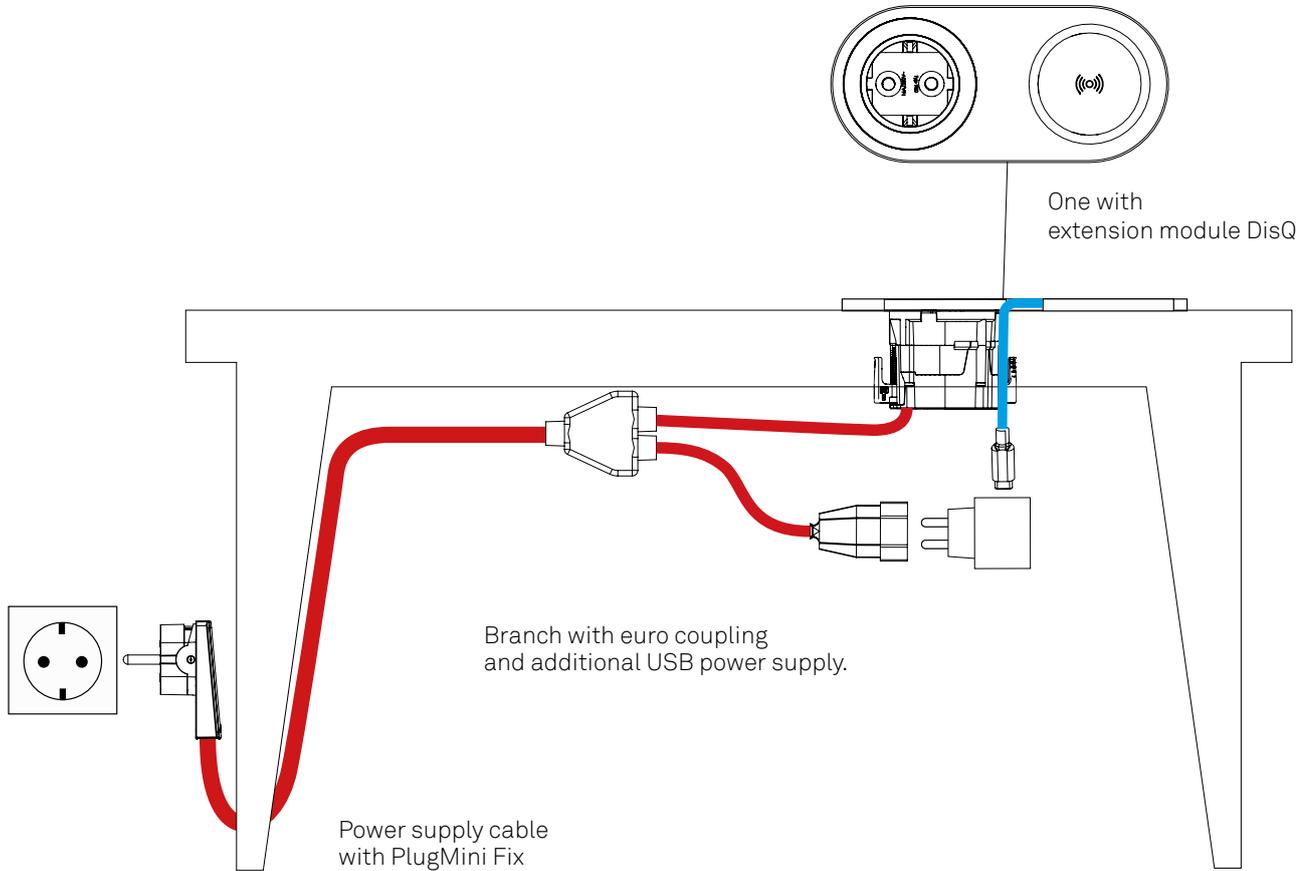

# EVoline® Power supply modules

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up /
<p><b>Power Supply Module with cable and PlugFix</b></p> <p>Type E+F i.e. Germany 16 A, 3 x 1.5 mm<sup>2</sup> Plug with extra low profile and movable plug face.</p>		<p>9331 0890 0000 Cable length 3 m, black</p> <p>9331 5510 0000 Cable length 3 m, white</p> <p>Cable extension per meter</p> <p>Additional branch 0.2 m with Euro coupling, black</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p><b>Power Supply Module with cable and PlugMini</b></p> <p>Connector type E + F i.e. Germany 16 A, 3 x 1.5 mm<sup>2</sup> Extra small and ultra-low profile grounded plug with movable face.</p>		<p>9332 4800 0000 Cable length 3 m, black</p> <p>9332 4810 0000 Cable length 3 m, white</p> <p>Cable extension per meter</p> <p>Additional branch 0.2 m with Euro coupling, black</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p><b>Power Supply Module with cable and angled plug</b></p> <p>Type E+F i.e. Germany, France, Belgium, Poland 16 A, 3 x 1.5 mm<sup>2</sup></p>		<p>9330 2020 0000 Cable length 3 m, black</p> <p>9332 2670 0000 Cable length 3 m, white</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>
<p><b>Power Supply Module with cable and plug</b></p> <p>Type J 3 x 1,5 mm<sup>2</sup> i.e. Switzerland</p>		<p>9330 2030 0000 10 A, Cable length 3 m, black</p> <p>9332 5370 0000 10 A, with fine-wire fuse, Cable length 3 m, black</p> <p>9330 2040 0000 16 A, Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p> <p>• • • • • • • • •</p>


Technical changes and printing errors reserved. | Similar pictures.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FlameDock One / Port / Port Push / U- & V-Dock / Up
<p><b>Power Supply Module with Cable and Overload Circuit Breaker</b></p> <p>Plug type J (T12) Power Supply Module with resettable overload switch 10 A 3 x 1,5 mm<sup>2</sup></p>		<p>9332 1090 0000 Cable length 3 m, black, mounted to product</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and angled plug</b></p> <p>Type G, i.e. Great Britain 13 A, 3 x 1,5 mm<sup>2</sup></p>		<p>9330 2070 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and angled plug</b></p> <p>Type K 13 A, 3 x 1,5 mm<sup>2</sup> Denmark. Standard</p>		<p>9330 2050 0000 Cable length 3 m, black</p> <p>9330 2060 0000 Plug, not angled, EDP-coded, Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and Plug</b></p> <p>Plug Type L i.e. Italy 16 A, 3 x 1,5 mm<sup>2</sup></p>		<p>9330 2080 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p> <p>Additional branch 0.2 m with Euro coupling, black</p>	<p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p> <p>● ● ● ● ● ● ● ● ●</p>
<p><b>Power Supply Module with cable and Plug</b></p> <p>Type B 115 V, 15 A, AWG 14 i.e. USA, Canada (UL/CSA)</p>		<p>9330 9160 6600 Cable length 3 m, black</p> <p>Cable extension on request</p>	<p>● ○ ○ ● ○ ● ○ ● ○</p> <p>● ● ● ● ● ● ● ● ●</p>

Technical changes and printing errors reserved. | Similar pictures.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTopPush / FrameDock / One / Port / PortPush / U- & V-Dock / Up /
<b>Power Supply Module with cable and Plug</b>		9330 9130 0000 Cable length 3 m, black  Cable extension on request	● ● ● ● ● ● ● ● ●
Type B 10 A, 3 × 1,5 mm <sup>2</sup> i.e. Australia			
<b>Power Supply Module with cable and ferrules</b>		9330 9510 0000 Cable length 3 m, black  Cable extension per meter  Additional branch 0.2 m with Euro coupling, black	● ●
16 A, 3 × 1,5 mm <sup>2</sup>			
<b>Power Supply Module with cable and connector</b>		9330 8420 0000 Plug Powered by GST18 without lock  9331 2490 0000 Plug Powered by GST18 with lock  Cable extension per meter  Additional branch 0.2 m with Euro coupling, black	● ●
16 A, 3 × 1,5 mm <sup>2</sup> Cable length 3 m Colour: black			
		9332 6170 0000 Plug Powered by GST15 (Mini) with lock  Cable extension per meter  Additional branch 0.2 m with Euro coupling, black	● ●
		9330 8440 0000 Plug WAGO WINSTA MIDI without lock  Cable extension per meter  Additional branch 0.2 m with Euro coupling, black	● ●

/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / One / Port / Port Push / U- & V-Dock / Up

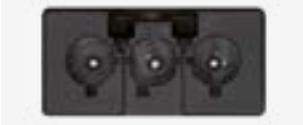Description	Picture	Order Nr. & Specifications												
		9332 1940 0000 Plug WAGO WINSTA MINI without lock	•	•	•	•	•	•	•	•	•	•	•	•
		Cable extension per meter	•	•	•	•	•	•	•	•	•	•	•	•
		Additional branch 0.2 m with Euro coupling, black	•	•	•	•	•	•	•	•	•	•	•	•
<b>Power Output Module with cable and connector</b>		9330 5810 0000 Socket Powered by GST18 without lock	•	•	•	•			•	•	•			
16 A, 3 × 1,5 mm <sup>2</sup> Cable length 3 m Colour: black		9331 2500 0000 Socket Powered by GST18 with lock	•	•	•	•			•	•	•			
		9332 6180 0000 Socket Powered by GST15 (Mini) with lock	•	•	•	•			•	•	•			
		9330 5830 0000 WAGO WINSTA MIDI socket without lock	•	•	•	•			•	•	•			
<b>Connector 3-pole Plug</b>		9330 2680 0000 Plug Powered by GST18	•	•		•							•	
Installed in the end cap Colour: black		9330 2660 0000 Plug WAGO WINSTA MIDI	•	•		•							•	
<b>Connector 3 pole Socket</b>		9330 8960 0000 Socket Powered by GST18	•	•		•							•	
Snap-In, installed in the end cap Colour: black		9330 8940 0000 Socket WAGO WINSTA MIDI	•	•		•							•	

Technical changes and printing errors reserved. | Similar pictures.

# EVoline® USB power supplies & connection cables

Description

Picture

Specifications

Order Number

## **Power supply 65 W\* with euro plug**

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I:  
USB-A connection: 5 V / 2.1 A (10.5W)

Output II:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W);  
12 V / 3 A (36 W); 15 V / 3 A (45 W);  
20 V / 3.25 A (65 W)

Capable of charging two devices at the same time (USB-C port and 2.1 A USB-A port), maximum 65 W total power.

Overcharge, deep discharge, overload and short circuit protection

Colour: black

Dimensions: 107 x 70 x 29 mm



6599 0912 3900

## **Power supply 65 W\* with 2 x USB C and euro plug**

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I & II single:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W);  
12 V / 3 A (36 W); 15 V / 3 A (45 W);  
20 V / 3,25 A (65 W)

Output I & II together:  
USB-C Power Delivery connection:  
45 W + 20 W or 20 W + 45 W

Capable of charging two devices at the same time (2x USB-C port), maximum 65 W total power.

Overcharge, deep discharge, overload and short circuit protection

Colour: white

Dimensions: 93 x 55 x 33 mm



6599 0913 2200

\* The power supply generally charges all common products. Due to the large number of the function cannot be guaranteed in every case for providers and devices.

Contents subject to printing errors, rights reserved to implement technical changes at any time | Photo images indicative only.

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**Power supply 20 W\*  
with euro plug**

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I:  
USB-A Quick Charge connection:  
5 V / 3.0 A (15 W)

Output II:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 2,22 A (20 W);  
12 V / 1,67 A (20 W)

Capable of charging two devices at the same time (USB-C port and USB-A port), maximum 20 W total power.  
Overcharge, deep discharge, over-load and short circuit protection  
Colour: black

Dimensions: 69 x 45 x 45 mm



6599 0913 0900

**Universal power supply 30 W \*  
with international plug adapters**

US, AU / CN, UK and EU plugs

Entrance:  
100 - 240 V AC, 50/60 Hz

Output I:  
USB-A Quick Charge connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W)  
12 V / 2,5 A (30 W); 20 V / 1,5 A (30 W)

Output II:  
USB-C Power Delivery connection:  
5 V / 3 A (15 W); 9 V / 3 A (27 W),  
12 V / 2,5 A (30 W); 15 V / 2 A (30 W)  
20 V / 1,5 A (30 W)

Capable of charging two devices at the same time (USB-C port and A USB-A port), maximum 30 W total power.

Overcharge, deep discharge, over-load and short circuit protection  
Colour: black

Dimensions: 97 x 44 x 36 mm



1599 0913 2000

\* The power supply generally charges all common products. Due to the large number of the function cannot be guaranteed in every case for providers and devices.

# EVoline® USB power supplies & connection cables

Description	Picture	Specifications	Order Number
<b>USB C charging cable</b>  Connector C - Connector C supports Power Delivery (PD3) up to 100 W E-Marker chip for 20 V / 5 A colour: black Length: 1 m			6599 0912 5600
<b>USB A 3.0 charging and data cable</b>  Plug A - Plug A up to USB SuperSpeed: 10 V / 2.1 A Data transmission: up to 5 Gbit/s colour: black Length: 1 m			6599 0912 6800



Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / FrameDock Hide / Port / Port Push / U- & V-Dock / Up /																				
<p><b>RJ45 Data Connector</b> <b>Reichle &amp; De-Massari</b></p> <p>with Cable and Plug / Socket</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 2150 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket</p> <p>9330 8270 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 7860 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0020 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td></td> <td></td> </tr> </table>	●	●	●			●	●	●			●	●	●			●	●	●		
●	●	●																					
●	●	●																					
●	●	●																					
●	●	●																					
<p><b>RJ45 Data Connector</b> <b>Reichle &amp; De-Massari</b></p> <p>Angled Outlet with labeling field with Cable and Plug</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 8200 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket (RJ45)</p> <p>9331 0010 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 6140 0000 RJ45 CAT6 shielded 3 m Cable Plug</p> <p>9331 0030 0000 RJ45 CAT6A shielded 3 m Cable Plug</p>	<table border="1"> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> </table>			●	●				●	●				●	●				●	●	
		●	●																				
		●	●																				
		●	●																				
		●	●																				
<p><b>2x RJ45 Data Connector</b> <b>Reichle &amp; De-Massari</b></p> <p>Angled Outlet with labeling field with Cable and Plug / Socket</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 2590 0000 RJ45 CAT6 shielded 0.2 m Cable, Socket (RJ45)</p> <p>9330 4340 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p> <p>9330 1230 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0040 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	<table border="1"> <tr> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> </tr> </table>			●	●				●	●				●	●				●	●	
		●	●																				
		●	●																				
		●	●																				
		●	●																				

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications	
<p><b>RJ45 Modular Adaptor ELBRO</b></p> <p>Modular Adaptor , 1:1 intercon- nected</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9330 8410 0000 (RJ45) CAT6 shielded</p> <p>9331 4080 0000 (RJ45) CAT6A shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>RJ45 Modular Adaptor ELBRO</b></p> <p>Angled Outlet with labeling field. Modular Adaptor, 1:1 interconnected</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9330 5880 0000 (RJ45) CAT6 shielded</p> <p>9331 4090 0000 (RJ45) CAT6A shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>2x RJ45 Modular Adaptor ELBRO</b></p> <p>Angled Outlet with Labeling Field Modular Adaptor, 1:1 interconnected</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9330 3920 0000 (RJ45) CAT6 shielded</p> <p>9331 4100 0000 (RJ45) CAT6A shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p><b>2x RJ45 Modular Adaptor ELBRO</b></p> <p>Modular Adaptor, 1:1 interconnected Angled: 90°</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 4870 0000 (RJ45) CAT6 shielded</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
			

Technical changes and printing errors reserved. | Similar pictures.

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / FrameDock Hide / Port / Port Push / U- & V-Dock / Up /
<p><b>VGA-Connector</b></p> <p>15 pole HDD socket with screw terminals, Installation dimensions: 25 x 50 mm</p>		<p>9330 0810 0000 with 3 m cable and plug</p>	<p>•      •      •</p>
<p><b>VGA-Connector</b></p> <p>Angled outlet with labeling field 15 pole HDD socket with screw terminals, Installation dimensions: 50 x 50 mm</p>		<p>9330 2370 0000 with 3 m cable and plug</p>	<p>•      •</p>
<p><b>VGA- and Audio Connector</b></p> <p>1x VGA Connector. 15 pole HDD socket with screw terminals, 1x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm</p>		<p>9330 7920 0000 with 3 m cables and plugs</p>	<p>•      •      •</p>
<p><b>VGA and Audio Connector</b></p> <p>Angled outlet with labeling field 1x VGA Connector, 15 pole HDD socket, with screw terminals. 1x Stereo Jack socket 3.5mm Installation dimensions: 50 x 50 mm</p>		<p>9331 5370 0000 with 3 m cables and plugs</p>	<p>•      •</p>

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description

Picture


Order Nr. & Specifications

**Audio Connector 3.5mm**

1 x Stereo Jack socket 3.5 mm  
 Installation dimensions: 25 x 50 mm



9330 0910 0000  
 with 3 m cable and plug

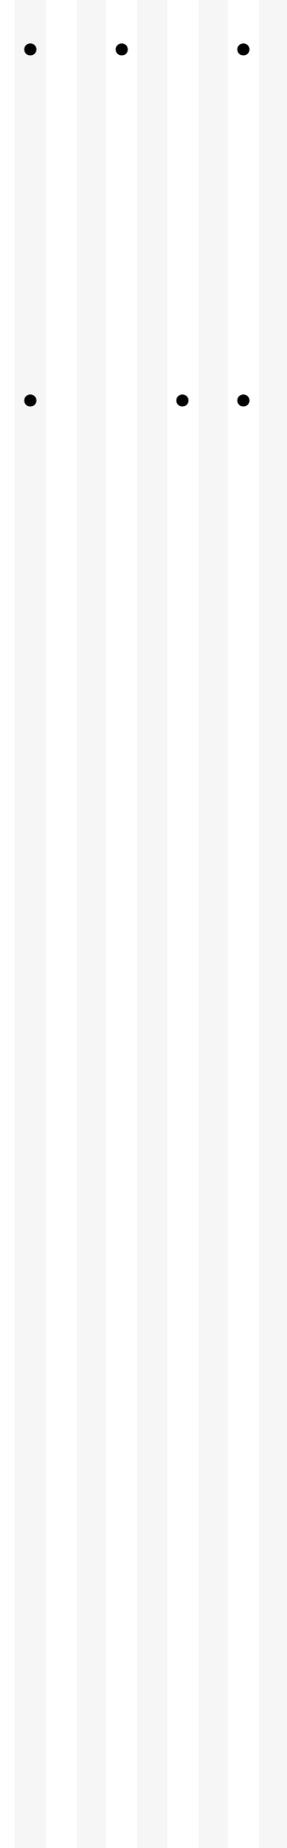

**Audio Connector 3.5mm**

Angled outlet with labeling field.  
 1 x Stereo Jack socket 3.5 mm  
 Installation dimensions: 50 x 50 mm



9330 2460 0000  
 with 3 m cable and plug



Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FlipTop Push</i> <i>/ FrameDock</i> <i>/ FrameDock Hide</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ U- &amp; V-Dock</i> <i>/ Up</i>
<p><b>HDMI-Connector</b></p> <p>HDMI connector with gilded contacts. Installation dimensions: 25 x 50 mm</p>		<p>9331 8940 0000 HDMI 2.0 connector with 0.2 m Cable and Socket</p> <p>9332 2800 0000 HDMI 2.0 connector with 3 m Cable and Plug</p>	<p>• •</p> <p>• •</p>
<p><b>HDMI-Connector</b></p> <p>Angled outlet with labeling field HDMI connector with gilded contacts. Installation dimensions: 50 x 50 mm</p>		<p>9331 8950 0000 HDMI 2.0 connector with 0.2 m Cable and Socket</p> <p>9332 2810 0000 HDMI 2.0 connector with 3 m Cable and Plug</p>	<p>• •</p> <p>• •</p>
<p><b>DisplayPort-Connector</b></p> <p>for digital signals DP 1.2 compliant. Installation dimensions: 25 x 50 mm</p>		<p>9331 7510 0000 with 0.4 m Cable and Socket</p>	<p>• •</p>
<p><b>DisplayPort-Connector</b></p> <p>Angled outlet with labeling field for digital signals DP 1.2 compliant. Installation dimensions: 50 x 50 mm</p>		<p>9331 7520 0000 with 0.4 m Cable and Socket</p>	<p>• •</p>

Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications					
<p><b>USB A Connector</b></p> <p>For data connection commercially available USB devices.</p> <p>USB 3.0: max. 5 Gbit/s data</p> <p>Installation dimension: 25 × 50 mm</p>		<p>9331 8620 0000 0.2 m Cable and Socket</p> <p>9331 1450 0000 1 m USB Cable Plug USB 3 Type A</p> <p>9331 1460 0000 3 m USB Cable Plug USB 3 Type A</p>	<p>•</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>•</p>		<p>•</p> <p>•</p> <p>•</p>	
<p><b>USB A Connector</b></p> <p>For data connection commercially available USB devices.</p> <p>USB 3.0: max. 5 Gbit/s data</p> <p>Angled outlet with labelling field.</p> <p>Installation dimension: 50 × 50 mm</p>		<p>9331 8630 0000 0.2 m Cable and Socket</p> <p>9331 1460 0000 1 m USB Cable, Plug USB 3 Type A</p> <p>9331 1460 0000 3 m USB Cable Plug USB 3 Type A</p>			<p>•</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>•</p>	

Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FlipTop Push FrameDock FrameDock Hide Port Push U- & V-Dock Up
<p><b>USB C Connector</b></p> <p>Suitable for power and data supply.                      USB PD (Power Delivery):                      5 A / max. 100 watts</p> <p>USB 3.1 Gen2:                      max. 10 Gbit/s data</p> <p>Installation dimension: 25 × 50 mm</p>		<p>9332 6390 0000                      1 m cable with USB plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> </div>
<p><b>USB C Connector</b></p> <p>Suitable for power and data supply.                      USB PD (Power Delivery):                      5 A / max. 100 watts</p> <p>USB 3.1 Gen2:                      max. 10 Gbit/s data</p> <p>Installation dimension: 50 × 50 mm</p>		<p>9332 6410 0000                      1 m cable with USB plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> </div>
<p><b>2x USB C Connector</b></p> <p>Suitable for power and data supply.                      USB PD (Power Delivery):                      5 A / max. 100 watts</p> <p>USB 3.1 Gen2:                      max. 10 Gbit/s data</p> <p>Installation dimension: 50 × 50 mm</p>		<p>9332 6420 0000                      1 m cable with USB plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 10%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> <div style="width: 20px; height: 100%; background-color: #ccc; position: relative;"> <span style="position: absolute; top: 35%; left: 50%; transform: translate(-50%, -50%);">●</span> </div> </div>

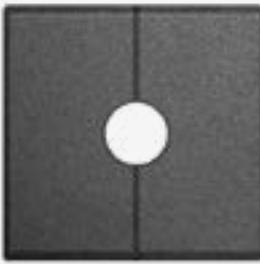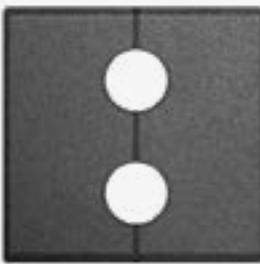

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FramePush / FrameDock / Port / PortPush / U- & V-Dock / Up /																																
<p><b>Cable Outlet Module</b></p> <p>1 cable passage Colour: black</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3790 0000 Ø 8 mm</p> <p>9331 0560 0000 Ø 12 mm</p> <p>9331 1670 0000 Ø 17 mm</p> <p>Additional diameters on demand</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●																				
●	●	●	●																																
●	●	●	●																																
●	●	●	●																																
<p><b>Cable Outlet Module</b></p> <p>2 cable passages Colour: black</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3800 0000 Ø 8 mm</p> <p>9331 1930 0000 Ø 12 mm</p> <p>Additional diameters on demand</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table>	●	●	●	●	●	●	●	●																								
●	●	●	●																																
●	●	●	●																																
<p><b>Cable Guide Module</b></p> <p>Clamp for 3 cables 2x 8 mm 1x 12 mm Colour: black</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 3600 0000 Holder for 3 Cables for mounting in the profile</p> <p>1599 0912 8700 Holder for 3 Cables with 2 holes for screwing</p>	<table border="1"> <tr> <td></td> <td></td> <td></td> <td>●</td> </tr> </table>				●																												
			●																																
<p><b>Cable assortment</b></p> <p>3.0 m cables 2 plugs</p> <p>cable extension and variations available on request</p>		<p>9332 6040 0000 HDMI 2.0 Cable</p> <p>9331 3060 0000 VGA Cable</p> <p>9331 3720 0000 Audio Stereo Cable</p> <p>9331 1060 0000 PatchCable CAT6, shielded</p> <p>9331 9810 0000 USB 3.0 Cable (Type A)</p>	<table border="1"> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●																												
●	●	●	●	●	●	●	●																												
●	●	●	●	●	●	●	●																												
●	●	●	●	●	●	●	●																												

Dock / R-Dock  
 Dock Square  
 Flip Top Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up

Description	Picture	Order Nr. & Specifications					
<b>Installation Space</b>		9330 7990 0000 Profile length: 15 mm	●	●	●	●	
Profile with black plastic cover to enable later insertation of additional modules.		9330 5620 0000 Profile length: 25 mm	●	●	●	●	
		9330 5630 0000 Profile length: 50 mm	●	●	●	●	
		9330 5640 0000 Profile length: 75 mm	●	●	●	●	
		9330 5650 0000 Profile length: 100 mm	●	●	●	●	
		9330 6390 0000 Profile length: 150 mm	●	●	●	●	
<b>Labeling Field</b>		9330 9000 0000 black	●	●	●	●	●
For individual labeling of modules.  Installation dimensions: 15 x 50 mm							
<b>Cover Plate</b>		9330 0150 0000 Dimensions: 5 x 50 mm	●	●	●	●	●
made of black plastic, provides distance between current modules, future changes are not possible		9330 7980 0000 Dimensions: 15 x 50 mm	●	●	●	●	●
		9330 0920 0000 Dimensions: 25 x 50 mm	●	●	●	●	●
		9330 0130 0000 Dimensions: 50 x 50 mm	●	●	●	●	●
		9330 0550 0000 Dimensions: 75 x 50 mm	●	●	●	●	●
		9330 0110 0000 Dimensions: 100 x 50 mm	●	●	●	●	●
		9330 7650 0000 Dimensions: 150 x 50 mm	●	●	●	●	●

# EVoline® Switches and push-buttons

Description	Picture	Order Nr. & Specifications	<i>                     Dock / R-Dock                      Dock Square                      FlipTop Push                      FrameDock                      FrameDock Hide                      Port                      Port Push                      U- &amp; V-Dock                      Up                 </i>
<p><b>ON / OFF switch</b></p> <p>230 V, 2-pole, illuminated in blue. For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 0010 0000	● ● ● ● ● ● ●
<p><b>ON / OFF "ECOswitch"</b></p> <p>230 V, 2-pole, illuminated in green. With "ECOswitch" symbol For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9332 8030 0000	● ● ● ● ● ● ●
<p><b>ON / OFF switch</b></p> <p>230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 6650 0000	● ● ● ● ● ● ●
<p><b>ON / OFF switch</b></p> <p>230 V, 2-pole, illuminated in blue. With lamp symbol For switching built-in sockets or for external assignment.</p> <p>Installation dimensions: 50 x 50 mm</p>		9330 6660 0000	● ● ● ● ● ● ●
<p><b>1x Stainless steel pushbutton with blue LED ring</b></p> <p>Pushbutton potential-free Switching data: 240 V ≈ / 3 A LED can be connected separately. LED operating data: 24 V ≈ / 7 mA</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 9300 0000 with Screw terminals</p> <p>9331 9240 0000 with 3 m cable and ferrules</p>	● ● ● ● ● ● ● ● ● ● ● ● ● ●

Technical changes and printing errors reserved. | Similar pictures.

*Dock / R-Dock  
 Dock Square  
 FlipTop Push  
 FrameDock  
 FrameDock Hide  
 Port  
 Port Push  
 U- & V-Dock  
 Up*

Description

Picture

Order Nr. & Specifications

**1x Stainless steel pushbutton with blue LED ring, angled outlet**

Pushbutton potential-free  
 Switching data: 240 V = / 3 A  
 LED can be connected separately.  
 LED operating data: 24 V = / 7 mA,  
 labeling field

Installation dimensions: 50 x 50 mm



9331 9320 0000  
 with Screw terminals

9331 9260 0000  
 with 3 m cable and ferrules

**2x Stainless steel pushbutton with blue LED ring, angled outlet**

Pushbutton potential-free  
 Switching data: 240 V = / 3 A  
 LED can be connected separately.  
 LED operating data: 24 V = / 7 mA  
 Angled outlet with labeling field

Installation dimensions: 50 x 50 mm




9331 9330 0000  
 with Screw terminals

9331 9270 0000  
 with 3 m cable and ferrules

**KNX Module, 4x**

voltage supply connection through  
 EIB terminal, 4 x pushbutton,  
 LED illuminated  
 frame: black

Installation dimensions: 50 x 50 mm

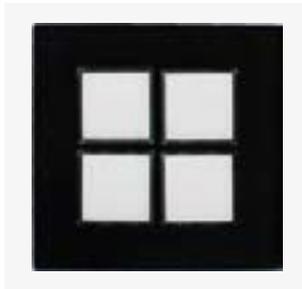

9331 5470 0000



# EVoline® Switches and push-buttons

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock / Dock Square / FlipTop Push / FrameDock / FrameDock Hide / Port / Port Push / U- &amp; V-Dock / Up /</i>
<p><b>Two-way switch</b></p> <p>10 AX - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6260 0000 3 m cable without plug</p>	
<p><b>Two-circle switch</b></p> <p>10 AX - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6250 0000 3 m cable without plug</p>	
<p><b>Push-button</b></p> <p>10 A - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6270 0000 3 m cable without plug</p>	
<p><b>Venetian switch</b></p> <p>10 A - 250 V</p> <p>Installation dimensions: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6290 0000 3 m cable without plug</p>	
<p><b>Venetian push-button</b></p> <p>10 A - 250 V</p> <p>Einbaumaß: 50 × 50mm</p> <p>Colours: Black, White, Aluminium Please specify when ordering.</p>		<p>9332 6280 0000 3 m cable without plug</p>	

Technical changes and printing errors reserved. | Similar pictures.



Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FlipTop Push / FramePush / FrameDock / Port / Port Push / U- & V-Dock / Up /															
<p><b>Residual Current Device</b></p> <p>RCD/RCCB 2-pole characteristic B, type A</p> <p>Installation dimensions: 100 x 50 mm</p>		<p>9330 0370 0000 Rated current: 25 A Rated fault current: 30 mA</p> <p>9330 8260 0000 Rated current: 16 A Rated fault current: 10 mA</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•					
•	•	•	•	•														
•	•	•	•	•														
<p><b>Circuit Breaker MCB</b></p> <p>2-pole characteristic B</p> <p>Installation dimensions: 100 x 50 mm</p>		<p>9330 1140 0000 Rated current: 10 A</p> <p>9330 1150 0000 Rated current: 13 A</p> <p>9330 0400 0000 Rated current: 16 A</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•														
•	•	•	•	•														
•	•	•	•	•														
<p><b>Overvoltage protector</b></p> <p>Protection level UP L/N PE 1.5KV</p>		<p>1599 0910 4000 Powered by GST18</p> <p>1599 0910 4100 WAGO WINSTA</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•												
•	•	•	•	•	•	•												
<p><b>Overload Circuit Breaker</b></p> <p>required for 3 sockets or more in Australia.</p> <p>1-pole. Type: Sliding switch</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9330 5840 0000 Australien 10 A, 250 V</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•								
•	•	•	•	•	•	•												
<p><b>Overload Circuit Breaker</b></p> <p>Switch-on overload switch Installation dimensions: 25 x 50 mm</p>		<p>9332 1080 0000 Switzerland Fuse: 10 A, 230 V~</p> <p>9332 0380 6600 U.S.A. (from the 4th socket) Fuse: 15 A, 125 V~</p>	<table border="1"> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> <tr> <td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td> </tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•	•	•	•												
•	•	•	•	•	•	•												

/ Dock / R-Dock  
 / Dock Square  
 / FlipTop Push  
 / FrameDock  
 / FrameDock Hids  
 / Port  
 / Port Push  
 / U- & V-Dock  
 / Up

Description

Picture


Order Nr. & Specifications

**Power Supply Module  
with Cable and Overload Circuit  
Breaker**

Plug Type: J (T12)  
 Switch-on overload switch (10 A)  
 3 x 1,5 mm<sup>2</sup>  
 e.g. Schweiz



9332 1090 0000  
 Cable length 3 m  
 mounted to product

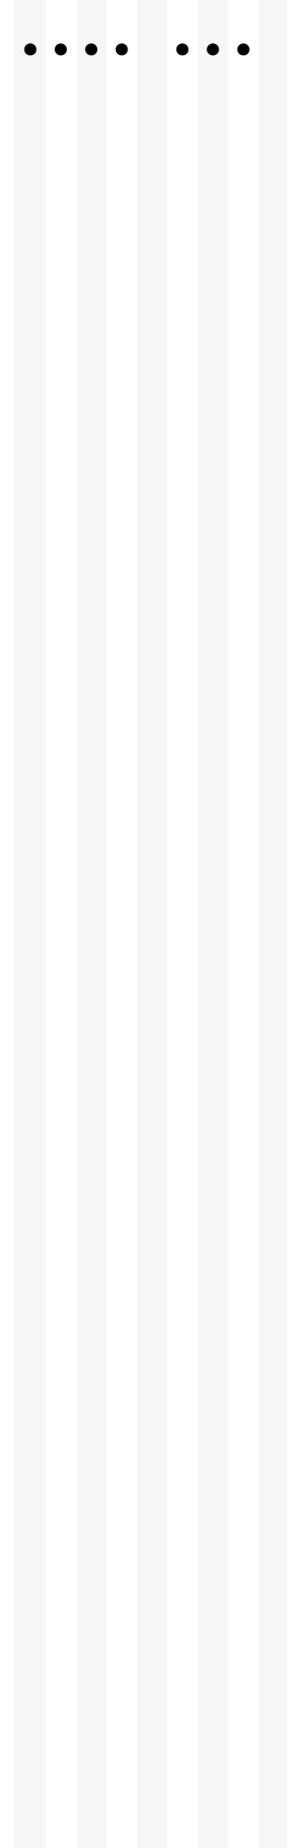

# How to change Interchangeable Modules

Both the FlipTop *Push* and the FrameDock can be individually equipped with data- and multimedia modules.

Should the usage requirements change in the workspace over time, data modules and cable can be replaced without the Port Push, DockSquare, FlipTop *Push* or FrameDock must be removed previously. Of course you can replace the modules between the profiles. \*



Releasing the interchangeable module with simple instruments like screwdrivers. Now another interchangeable module can be mounted to the System  
(this example: FrameDock).



\* Except for Port Push.

# Combination of Interchangeable Modules

Your usage requirements are as flexible as you are.  
So that your workspace keeps tailored to you, you always can equip your system with a new interchangeable module.



Single Modules

Interchangeable Modulee



Examples for the configuration of the interchangeable Modules of FlipTop Push, FrameDock and Dock Square

Description	Picture	Order Nr. & Specifications	FlipTop Push FrameDock FrameDock V-Dock Dock Square Port Push U-Dock
<b>RJ45 Modular Adaptor ELBRO</b>  RJ45 to RJ45, 1:1 interconnected for Patch cable.  1/2 Module		9331 9010 0000 RJ45 CAT6 unshielded socket to socket (RJ45), without cable  9331 8090 0000 RJ45 CAT6 shielded socket to socket (RJ45), without cable  9331 8290 0000 RJ45 CAT6A shielded socket to socket (RJ45), without cable	● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●
<b>Data Plate with Data Socket Reichle &amp; De-Massari</b>  With Cable  1/2 Module		9331 8420 0000 RJ45 Cat6 shielded with 0,2 m cable and socket  9331 8410 0000 RJ45 Cat6 unshielded with 3m cable and plug  9331 8070 0000 RJ45 Cat6 shielded with 3m cable and plug  9331 8400 0000 RJ45 Cat6A shielded with 3m cable and plug  9332 6130 0000 RJ45 Cat6A shielded with 3m cable and plug	● ● ● ● ● ● ● ● ● ● ● ●
<b>Data Plate with Data Socket Reichle &amp; De-Massari</b>  With Cable  1/1 Module		9331 8420 2200 RJ45 Cat6 shielded with 0,2 m cable and socket  9331 8410 2200 RJ45 Cat6 unshielded with 3m cable and plug  9331 8070 2200 RJ45 Cat6 shielded with 3m cable and plug  9331 8400 2200 RJ45 Cat6A shielded with 3m cable and plug	● ●

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock Square  
 Port Push  
 U-Dock

Description

Picture

Order Nr. & Specifications

**VGA-Connector**


15 pole HDD socket  
 with screw connector

1/2 Module



9331 8550 0000  
 with socket-socket (without cable)

9331 8100 0000  
 with 3 m cable and plug

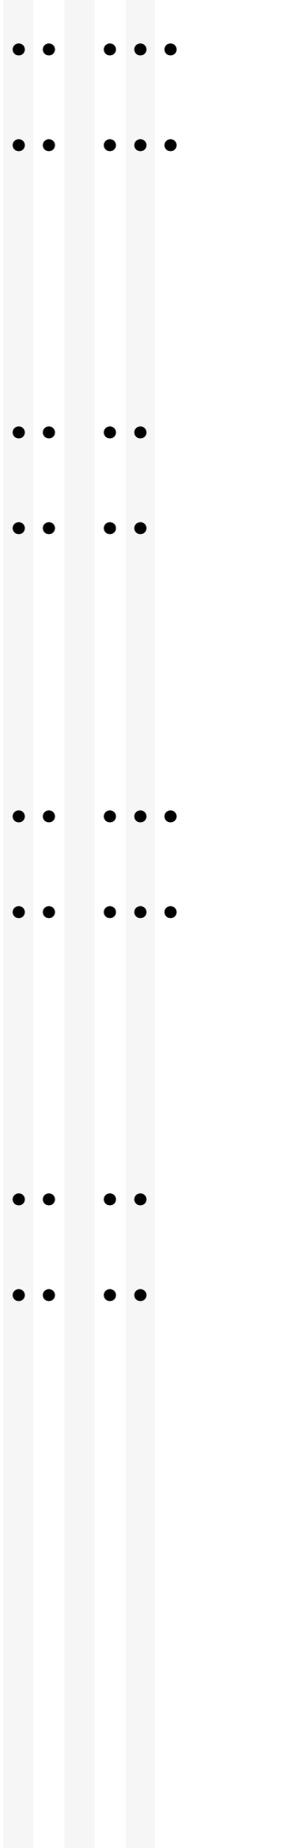

**VGA-Connector**

15 pole HDD socket  
 with screw connector

1/1 Module



9331 8550 2200  
 with socket-socket (without cable)

9331 8100 2200  
 with 3 m cable and plug

**Audio Connector 3,5 mm**

1x Stereo Jack socket 3.5 mm

1/2-Module



9331 8220 0000  
 with 3 m cable and socket

9331 8210 0000  
 3 m cable and plug

**Audio Connector 3,5 mm**

1x Stereo Jack socket 3.5 mm

1/2-Module



9331 8220 2200  
 with 3 m cable and socket

9331 8210 2200  
 with 3 m cable and plug

Description

Picture

Order Nr. & Specifications

**Stainless steel pushbutton with blue LED ring**


Pushbutton potential-free  
Switching data: 240 VAC/DC, 3 A  
LED can be connected separately.  
LED operating data: 24 VAC/DC, 7 mA

1/2 Module



9331 8870 0000  
with Screw terminals

9331 8850 0000  
with 3 m cable

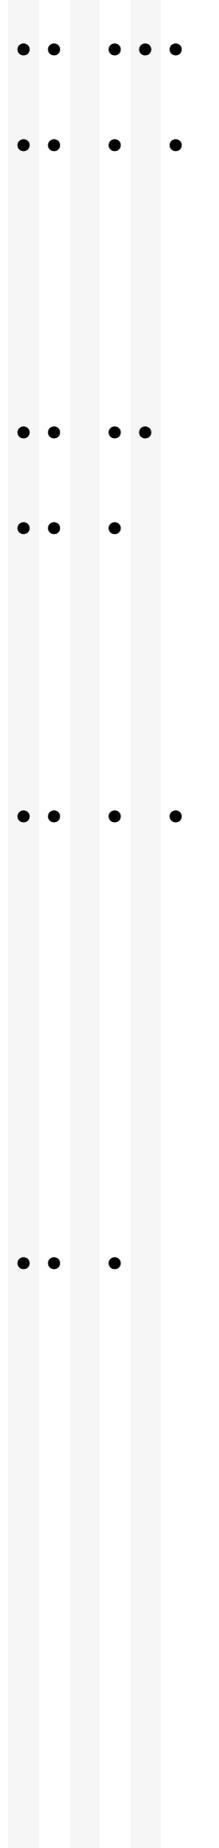

**Stainless steel pushbutton with blue LED ring**

Pushbutton potential-free  
Switching data: 240 V ≈ / 3 A  
LED can be connected separately  
LED operating data: 24 V ≈ / 7 mA

1/1 Module



9331 8870 2200  
with Screw terminals und blauer Ring-LED

9331 8850 2200  
with 3 m cable



**Audio connector and stainless steel pushbutton with blue LED ring**

1x stereo jack socket 3.5 mm  
1x pushbutton, potential-free  
Switching data: 240 V ≈ / 3 A  
LED can be connected separately  
LED operating data: 24 V ≈ / 7 mA

1/2 module



9331 8880 0000  
Audio  
3 m cable

Pushbutton  
3 m cable



**Audio connector and stainless steel pushbutton with blue LED ring**


1x stereo jack socket 3.5 mm  
1x pushbutton, potential-free  
Switching data: 240 V ≈ / 3 A  
LED can be connected separately  
LED operating data: 24 V ≈ / 7 mA

1/1 module



9331 8880 2200  
Audio  
3 m cable

Pushbutton  
3 m cable

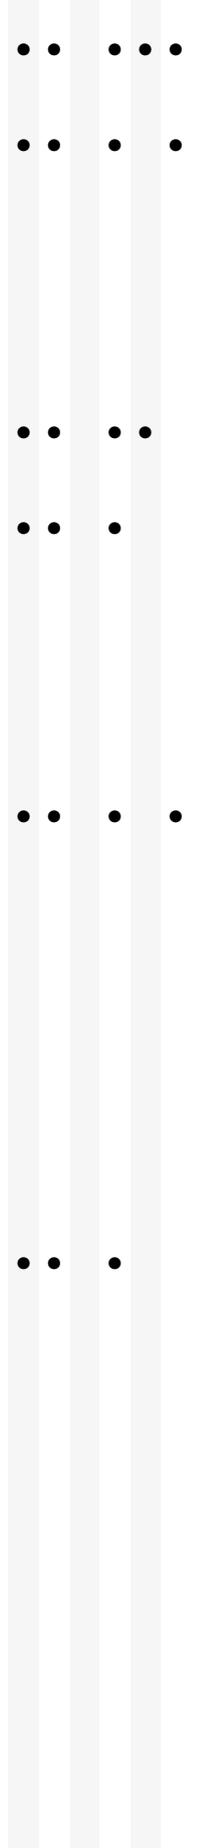

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock  
 Dock Square  
 Port Push  
 U-Dock

Description

Picture

Order Nr. & Specifications

**HDMI-, VGA- and Audioconnector**

HDMI socket with gilded Contacts, 15 pole HDD VGA socket, Stereo Jack socket with cable

1/1 Module



9332 5700 0000  
 HDMI 2.0, VGA, Audio:  
 Each with 3 m cable and plug

9332 6050 0000  
 HDMI 2.0, VGA, Audio:  
 0,2 m cable and socket



**Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari**

1 x Stereo Jack socket, 1 x Data socket

1/2-Module



9331 8680 0000  
 Audio:  
 Connector 3,5 mm with 3 m cable and plug

Data  
 RJ45 Cat.6 shielded  
 3 m cable and plug



**Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari**

1 x Stereo Jack socket, 1 x Data socket

1/1-Module



9331 8680 2200  
 Audio:  
 Connector 3,5 mm with 3 m cable and plug

Data  
 RJ45 Cat.6 shielded  
 3 m cable and plug



Description	Picture	Order Nr. & Specifications	
<p><b>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</b></p> <p>1 × Stereo Jack socket 1 × Modular adaptor RJ45 RJ45, 1:1 interconnected for Patch cable</p> <p>1/2 Module</p>		<p>9331 8690 0000 Audio: Connector 3,5 mm with 3 m cable</p> <p>Data socket to socket RJ45 Cat.6 shielded</p> <p>9332 0110 0000 Audio: Connector 3,5 mm without cable</p> <p>Data socket to socket RJ45 Cat.6 shielded</p>	<p>● ● ● ● ●</p> <p>● ● ● ● ●</p>
<p><b>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</b></p> <p>1 × Stereo Jack socket, 1 × Cat.6 Module adaptor</p> <p>1/1 Module</p>		<p>9331 8690 2200 Audio: Connector 3,5 mm with 3 m cable</p> <p>Data RJ45 Cat.6 shielded socket to socket RJ45</p> <p>9332 0110 2200 Audio: Connector 3,5 mm without cable</p> <p>Data RJ45 Cat.6 shielded socket to socket RJ45</p>	<p>● ● ● ● ●</p> <p>● ● ● ● ●</p>
<p><b>HDMI-Connector</b></p> <p>with gilded contacts</p> <p>1/2 Module</p>		<p>9332 5480 0000 HDMI 2.0 with socket – socket (without cable)</p> <p>9331 9540 0000 HDMI 2.0 with 0.2 m cable and socket</p> <p>9332 2820 0000 HDMI 2.0 with 3 m cable and plug</p>	<p>● ● ● ● ● ●</p> <p>● ● ● ● ● ●</p> <p>● ● ● ● ● ●</p>
<p><b>HDMI-Connector</b></p> <p>with gilded contacts</p> <p>1/1 Module</p>		<p>9331 9540 2200 HDMI 2.0 with 0.2 m cable and socket</p> <p>9332 2820 2200 HDMI 2.0 with 3 m cable and plug</p>	<p>● ● ● ● ●</p> <p>● ● ● ● ●</p>

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock Square  
 Port Push  
 U-Dock  
 /

Description

Picture

Order Nr. & Specifications

**Display Port-Connector**

DP 1.2 compliant

1/2 Module



9331 8140 0000  
 with 0.4 m cable and socket



**Display Port-Connector**

DP 1.2 compliant

1/1 Module



9331 8140 2200  
 with 0.4 m cable and socket

Description	Picture	Order Nr. & Specifications	
<b>USB-Connector 3.0</b>  USB 3.0 Type A  1/2 Module		9331 8530 0000 with socket – socket Type A  9331 8650 0000 with 0.2 m cable and socket  9332 5680 0000 with 0,5 m cable and plug  9331 8460 0000 with 3 m cable and plug	● ● ● ● ● ●  ● ● ● ● ● ●  ● ● ● ● ● ●  ● ● ● ● ● ●
<b>USB-Connector 3.0 Type A</b>  USB 3.0 Type A  1/1 Module		9331 8650 2200 with 0.2 m cable and socket  9331 8460 2200 with 3 m cable and plug	● ● ● ● ● ●  ● ● ● ● ● ●
<b>USB-Connector 3.1 Type C</b>  USB 3.1 Type C Suitable for power and data supply. 5 A / max. 100 watts up to 10 Gbit / s data  1/2 module		9332 6370 0000 with 1 m USB cable and plug	● ● ● ● ● ●

FlipTop Push  
 FrameDock  
 FrameDock Hide  
 V-Dock  
 Dock Square  
 Port Push  
 U-Dock

Description

Picture

Order Nr. & Specifications

**Cable Outlet Module**

for one cable like:  
 Patch cable, audio cable etc.

1/1 Module



9331 8230 0000  
 Empty module, without cable



**Cable Outlet Module**

for one cable like:  
 Patch cable, audio cable etc.

1/2 Module



9332 0100 0000  
 Empty module, without cable



**Cable Outlet Module 5 fold**

for 5 cables;  
 4 passages 10 mm  
 1 passage 20 mm

1/1 Module



9332 5060 0000  
 black  
 9332 5060 0010  
 white



**Installation Space**

Profile to enable later insertation of  
 interchangeable modules

1/1 Module




9331 8300 0000



**Installation Space**

Profile to enable later insertation of  
 interchangeable modules

1/2 Module

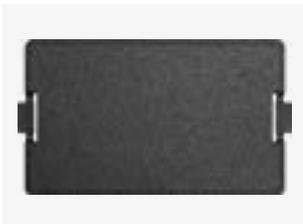

9332 1410 0000





Wing


## So werden Schubladen sicher elektrifiziert

Wing, der Kabelmanager für alle beweglichen und ausziehbaren Möbelteile - waagrecht und senkrecht. Die perfekte Lösung für Steckdosen und Charger-Systeme, die in Schubladen integriert werden sollen. Der Wing führt Leitungen platzsparend hinter dem Schubfach, ohne diese zu knicken oder einzuklemmen und gewährleistet ein reibungsloses Öffnen und Schließen. Ob in Küchen oder Werkräumen, an Holz- oder Metallrückwänden, die Einbaulösung ermöglicht individuelle Montageoptionen, so dass Anschlüsse einfach erreichbar und sicher im Stauraum verbaut sind.

Wing

## This is how drawers are safely electrified

The Wing is the solution for in-drawer-fitted sockets and charging systems. It guides cables behind the drawer to save space without bending or jamming them, ensuring that drawers open and close easily. Added to kitchens or workrooms, wooden or metal rear panels, the fitted solution can be mounted as required so that connections are easily accessible and securely concealed in the storage space.

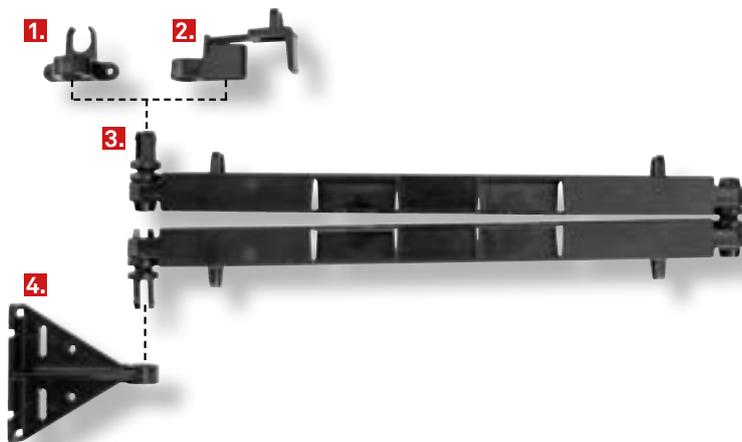


- |   |   |
|---|---|
| <b>1.</b> Kabelführung für Holzrückwand zum Anschrauben | <i>Cable guide for wooden back panel to be screwed on</i> |
| <b>2.</b> Kabelführung für Metallrückwand zum Klemmen   | <i>Cable guide for metal back panel for clamping</i>      |
| <b>3.</b> Kabelführungsarm vormontiert                  | <i>Pre-assembled cable guide arm</i>                      |
| <b>4.</b> Montagewinkel                                 | <i>Mounting bracket</i>                                   |

Patent angemeldet

*Patent pending*

Der EVOLine Wing ist kompatibel mit den unterschiedlichsten EVOLine Anschlussystemen, ganz nach Ihren Wünschen oder Anforderungen.

*The EVOLine Wing is compatible with a wide range of EVOLine systems, according to your wishes or requirements.*

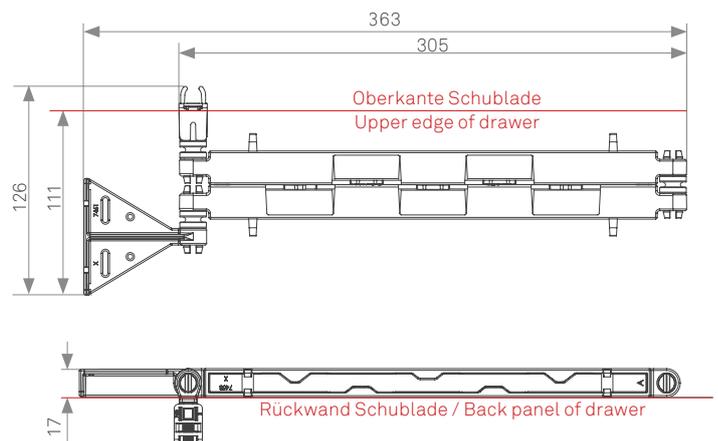



PowerOrganiser



## Problemlose Elektrifizierung in Schubladen


Mit Hilfe des Wing in Verbindung mit dem neuen Schubladeneinsatz können Schubladen nun sauber verkabelt und elektrifiziert werden. Die integrierte Steckdose One sorgt für eine makellose Arbeitsfläche und bietet den nötigen Stromanschluss, wenn dieser benötigt wird.

PowerOrganiser

## Easy electrification in drawers

With the help of the Wing in conjunction with the new drawer insert, drawers can now be neatly wired and electrified. The integrated One socket ensures an immaculate work surface and provides the necessary power connection when it is needed.

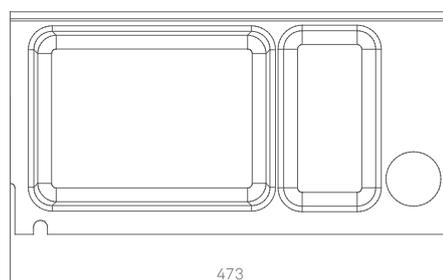

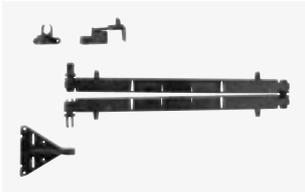Description	Picture	Specifications	Order Number
<p><b>Wing</b></p> <p>Cable guide for electrification and pull-out protection of drawers. Also suitable for guiding flexible steel cables, wires, etc.</p> <p>Variable stop options and 2 cable guides for mounting on wooden or metal back panels.</p> <p>Also available as a set with additional R-Dock available.</p>			1599 0912 7800
<p><b>Wing Set with additional R-Dock</b></p> <p>R-Dock housing made of aluminium, silver anodised.</p> <p>VDE socket(s), 0°, 16 A, with contact protection.</p> <p>USB charger 5 V / 2,1 A</p> <p>Power supply cable entry in the underside of the profile or through one of the end caps.</p> <p>Fixed supply cable 2.5 m with angle plug, enclosed loose.</p>		<p>R-Dock version: 1x VDE 1x double charger AC</p> <p>R-Dock version: 2x VDE</p> <p>R-Dock version: 2x VDE 1x double charger AC</p>	<p>1598 0001 5400</p> <p>1598 0001 5500</p> <p>1598 0001 5600</p>
<p><b>PowerOrganiser</b></p> <p>Set for the electrification of drawers.</p> <p>Consisting of:</p> <ul style="list-style-type: none"> <li>- One, black with VDE socket, 3m cable, VDE plug (enclosed loose) and holder</li> <li>- Drawer insert, anthracite 241x473x56mm</li> <li>- Wing</li> </ul>			1592 8003 0300





# EVOLine® CableManagement



WireLane

## Geordnete Kabelkette

Mit der WireLane laufen alle Kabel in geordneten Bahnen. Der Untertischkanal aus Kunststoff ist verschraubbar, verkettbar und biegsam. Einzelne Glieder können miteinander verbunden oder getrennt werden.

WireLane

## Organised cabling

With the WireLane, all cables run in orderly tracks. The plastic under-the-table channel is screwable, linkable and flexible. Individual links can be connected or disconnected.

Bridge

## Trittfeste Kabelschiene

Die Bridge schafft Ordnung in der Kabelführung. Die Schiene ist trittfest, überrollgeeignet und so flach gestaltet, dass keine Stolperkante entsteht. In ihrem stabilen Gehäuse aus eloxiertem Aluminium werden Strom- und Datenkabel separiert in zwei Kammern geführt.

Bridge

## Durable Floor Trunking

The Bridge tidies up the cable routing. The rail is rigid, suitable for rolling over and so flat that no tripping hazard arises. Power and data cables are laid separately in two compartments in their sturdy anodised aluminium housing.



Rail

## Der robuste und erweiterbare Kabelkanal

Nicht alle Strom- und Datenanschlüsse müssen auf der Tischfläche zugänglich sein. Die Rail liefert eine robuste Möglichkeit, einzelne sowie mehrere Expresssteckdosen oder ein frei konfigurierbares U-Dock unter dem Tisch zu montieren.

Rail

## Sub-mounted Cable Tray

Not all power and data connections need to be accessible on the desktop. In the case of representative tables, even a completely free area is often desired. The rail provides a robust option for mounting single and multiple express sockets or a freely configurable U-dock under the table.

CableSleeve

## Flexibler Kabelschlauch


Der CableSleeve ist ein flexibler Kabelschlauch, der dank des strapazierfähigen Polyesterwebes und integriertem Reißverschluss mehrere Kabel einfach und bequem bündeln und ordnen kann. Mit dem zusätzlichen Haltemagnet bleibt der Kabelschlauch an Ort und Stelle.


CableSleeve


## Flexible CableSleeve


The CableSleeve is a fast and convenient solution for hiding and organising cable mess, thanks to its durable polyester fabric and zip opening. The CableSleeve is a fast and convenient solution for hiding and organising cable mess. The CableSleeve can also be held in place with a floor magnet.

Description	Picture	Specifications	Order Number
<p><b>Bridge Module Arc 90°</b></p> <p>includes 4 Fixing bolt</p>			1593 5090 0600
<p><b>Bridge Module T</b></p> <p>includes 6 Fixing bolts</p>			1593 5090 0500
<p><b>Bridge Module Cross</b></p> <p>includes 8 Fixing bolts</p>			1593 5090 0200
<p><b>Bridge Module Adaptor WireLane</b></p> <p>can also be used as end piece.</p>			1593 5090 0100
<p><b>Bridge Module Vertical</b></p>			1593 5090 0400
<p><b>Bridge Connectors</b></p> <p>2 Pieces</p>			1593 5090 0300

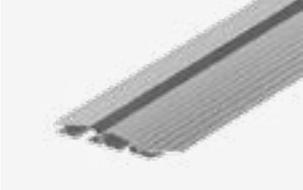Description	Picture	Specifications	Order Number
<p><b>Bridge</b></p> <p>cable cover made of aluminium for screw fixing, with black trim, without screws</p>		<p><b>4 CableClips</b></p> <p>Length 500 mm: Profile silver Profile black</p> <p>Length 800 mm: Profile silver Profile black</p> <p>Length 1.200 mm: Profile silver Profile black</p>	<p>1593 5010 5000 1593 5030 5000</p> <p>1593 5010 8000 1593 5030 8000</p> <p>1593 5011 2000 1593 5031 2000</p>
<p><b>Bridge</b></p> <p>cable cover made of aluminium With double-sided tape with black trim</p>		<p><b>4 CableClips</b></p> <p>Length 500 mm: Profile silver Profile black</p> <p>Length 800 mm: Profile silver Profile black</p> <p>Length 1.200 mm: Profile silver Profile black</p>	<p>1593 5020 5000 1593 5040 5000</p> <p>1593 5020 8000 1593 5040 8000</p> <p>1593 5021 2000 1593 5041 2000</p>
		<p><b>8 CableClips</b></p> <p>Length 1.600 mm: Profile silver Profile black</p> <p>Length 2.000 mm: Profile silver Profile black</p>	<p>1593 5011 6000 1593 5031 6000</p> <p>1593 5012 0000 1593 5032 0000</p>
		<p><b>Special length</b> <b>(available in 50 mm increments, max. length 2.000 mm)</b></p> <p>Profile silver Profile black</p>	<p>9331 0180 0000 9332 5310 0000</p> <p>9331 2570 0000 9332 5320 0000</p>

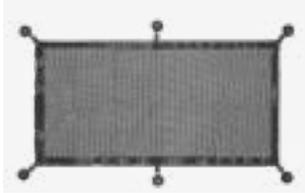Description	Picture	Specifications	Order Number
<p><b>WireLane</b></p> <p>under desk cable channel made of plastic. The elements can be linked and separated. Width: 80 mm</p>		<p>Length: 750 – 1000 mm</p> <p>Colour: black Colour: lightgrey</p>	<p>6593 5201 0000 6593 5211 0000</p>
<p><b>WireLane Strain Relief</b></p> <p>in black plastic with two clamps for cable</p>			6593 5290 0100
<p><b>WireLane Adapter</b></p> <p>For connecting the U-Dock or Flip TopPush with the WireLane.</p>			9331 8700 0000
<p><b>WireLane Fixture</b></p> <p>For attaching the WireLane to the Dock or R-Dock.</p>			on request
<p><b>CableSleeve</b></p> <p>flexible, made of polyester fabric with zipper for bundling cables length: 2 m color: black</p>		<p>Ø 35 mm (stretchable to max. 50 mm)</p> <p>Ø 20 mm (stretchable to max. 30 mm)</p>	<p>1599 0912 5500 1599 0912 6700</p>
<p><b>Fixing magnet</b></p> <p>Rubberised magnet for fastening the cable sleeve. incl. cable tie Ø 30 mm</p>			1599 0912 7200
<p><b>CableNet</b></p> <p>Cable net made of polyester, for under-desk mounting. With 6 round fixers to screw on and velcro cable ties. incl. 6 screws Dimensions: approx. 69 x 34 cm</p>			6599 0913 3600

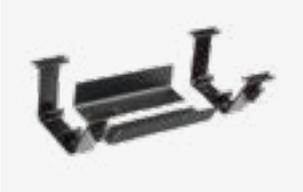Description	Picture	Specifications	Order Number
<p><b>Rail</b></p> <p>For under desk installation, For U-Dock and Express. Bespoke profile lengths available upon request.</p>		<p><b>for U-Dock</b></p> <p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 150 mm      1593 5400 0700            Profile length 300 mm      1593 5400 0100            Profile length 500 mm      1593 5400 0200</p>	
		<p><b>3 black plastic brackets with 4 aluminium profiles</b></p> <p>Profile length 2 x 300 mm      1593 5400 0500            Profile length 2 x 400 mm      1593 5400 0600</p>	
		<p><b>For Express</b></p> <p><b>2 black plastic brackets with 2 aluminium profiles</b></p> <p>Profile length 165 mm      1593 5400 0300            (for 3-gang)</p> <p>Profile length 215 mm      1593 5400 0400            (for 4-gang)</p>	
		<p><b>Individual</b></p> <p>1 black plastic brackets for Express      9331 6230 0000</p>	
		<p>1 black plastic brackets for U-Dock      9331 6220 0000</p>	
		<p>1 Pair Aluminium profiles per 100 mm      9331 6210 0000</p>	

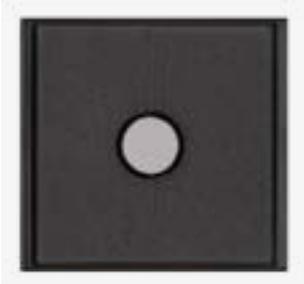Description	Picture	Specifications	Order Number
<p><b>Cable Passage Port</b></p> <p>Aluminium housing, silver anodised Without modules</p> <p>Mounting hole <math>\varnothing</math> 102 mm</p>		<p>Rocking cover and collar made of silver lacquered plastic</p>	1593 1002 5301
		<p>Rocking cover and collar made of black lacquered plastic</p>	1593 1003 2601
		<p>Rocking cover made of solid stainless steel in CD-look, collar made of plastic, painted to match</p>	1593 1003 2701
<p><b>Cable Outlet-Module</b></p> <p>1 cable passage</p> <p>installation dimensions: 50 x 50 mm</p>		<p><math>\varnothing</math> 8 mm</p>	9331 3790 0000
		<p><math>\varnothing</math> 12 mm</p>	9331 0560 0000
		<p><math>\varnothing</math> 17 mm</p>	9331 1670 0000
		<p>Other <math>\varnothing</math> on request</p>	
<p><b>Cable Outlet-Module</b></p> <p>2 cable passages</p> <p>Installation dimensions: 50 x 50 mm</p>		<p><math>\varnothing</math> 8 mm</p>	9331 3800 0000
		<p><math>\varnothing</math> 12 mm</p>	9331 1930 0000
		<p>Other <math>\varnothing</math> on request</p>	
<p><b>Cable Guide-Module</b></p> <p>Clamp for 3 cables</p> <p>2x 8 mm</p> <p>1x 12 mm</p> <p>Colour: black</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>Holder for 3 Cables for mounting in the profile</p>	9331 3600 0000
		<p>Holder for 3 Cables with 2 holes for screwing</p>	1599 0912 8700

Description	Picture	Specifications	Order Number
<p><b>Empty Floor Outlet</b></p> <p>cable passage for installation in double and cavity floors, cover with bracket for WireLane.</p> <p>Installation dimensions: Ø 125 mm</p>		<p>black lightgrey</p>	<p>1594 9000 0000 1594 9100 0000</p>
<p><b>Floor Outlet</b> with electrical socket insert</p> <p>VDE-compliant, black, with contact protection, with 3.0 m cable and plug powered by GST18, cover with bracket for WireLane</p> <p>Installation dimensions: Ø 125 mm</p>		<p>Cover black Cover lightgrey</p>	<p>1594 9000 0100 1594 9100 0100</p>



# EVoline® Dock Accessories

Dock Befestigungen

## **Fester Halt für alle Dock-Profile**

Für jeden Dock gibt es die perfekte Befestigungsmöglichkeit – ob als Auftischvariante, an Tischkanten oder Tischbeinen. Je nach Ausführung kann die Befestigung geschraubt, geklemmt oder mit einem Magneten angebracht werden.

Eine weitere Auswahl finden Sie in unserer Preisliste und auf der Homepage.

*Dock mounting options*

## **Dock Profile fixings**

*The Dock can be fixed using a number of mounting options suitable for both on and under desk installation.*

*The full selection can be found in our price list and on our homepage.*



Description	Picture	Specifications	Order Number
<p><b>Mounting Clamp</b></p> <p>twist-proof including non-slip covering            Colour: black            for profiles:            Dock, U-Dock, R-Dock</p>		<p>Span width 8 – 40 mm</p> <p>Span width 8 – 40 mm, 2x</p> <p>Span width 40 – 75 mm</p> <p>Span width 40 – 75 mm, 2x</p>	<p>1599 0902 1200</p> <p>1599 0902 0500</p> <p>1599 0902 1300</p> <p>1599 0902 1000</p>
<p><b>Mounting Clamp</b></p> <p>twist-proof including non-slip covering            Colour: white            for profiles:            Dock, U-Dock, R-Dock</p>		<p>Span width 8 – 40 mm</p> <p>Span width 8 – 40 mm, 2x</p> <p>Span width 40 – 75 mm</p> <p>Span width 40 – 75 mm, 2x</p>	<p>1599 0909 3300</p> <p>1599 0909 5600</p> <p>1599 0909 3900</p> <p>1599 0909 5700</p>
<p><b>Stainless Steel Mounting Clamp</b></p> <p>twist-proof desk clamp            installed and secured with allen screws.            For profiles:            Dock, U-Dock, R-Dock, V-Dock</p>		<p>Span width 18 – 25 mm</p>	<p>1599 0909 1500</p>
<p><b>Stainless Steel Angle</b></p> <p>for 90° attachment of the U-Dock.            Easy to slide into the profile.            Suitable for on-table and under-table mounting.            2 pcs. per set</p>	 		<p>9332 6140 0000</p>

Description	Picture	Specifications	Order Number
<p><b>Mounting set for under cabinet installation</b></p> <p>consists of two Dock brackets with wood screws screw: 3.5 x 15 mm</p>			1599 0903 8300
<p><b>Mounting set for desk installation</b></p> <p>consists of two Dock brackets with wing nut screws screw: M4 x 40 mm</p>			1599 0903 8200
<p><b>Stainless Steel Pillar</b></p> <p>Steel pillar for Docks consisting of: stainless steel sleeve, screw, nut, washer and rubber seal for profiles: Dock, R-Dock, U-Dock</p>		<p>Material : Stainless steel for surface thickness up to 50 mm</p>	1599 0906 0700
<p><b>Angle Profile</b></p> <p>for fixing of V-Dock</p>		<p>Length: 100 mm Length: 60 mm</p>	<p>1599 0908 4400 1599 0909 6400</p>
<p><b>Mounting clamps</b></p> <p>2 pieces, black, for fastening the Dock Square. For an optimal clamping effect, the clamps are simply pushed completely into the base.</p>		<p>with knurled screws Clamping range: 12 - 28 mm  with hexagon sockets Clamping range: 17 - 28 mm</p>	<p>1599 0912 0200  1599 0912 0400</p>
<p><b>Magnetic attachment</b></p> <p>Suitable for U-Dock and V-Dock. To be pushed into the fastening groove on the underside of the profile.</p> <p>Magnet dimensions: 43 x 32 mm</p>			1599 0913 1100

Description	Picture	Specifications	Order Number
<p><b>Quicklock Pro</b></p> <p>fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: Dock, R-Dock</p>		<p>Length: 100 mm without bracket</p> <p>length: 150 mm includes bracket for Wire-Lane connection</p> <p>length: 200 mm includes bracket for Wire-Lane connection</p>	<p>1599 0910 8500</p> <p>1599 0910 8300</p> <p>1599 0910 8400</p>
		<p><b>Mounted on product</b></p>	
		<p>profile min. length: 100 mm price unit: 100 mm</p>	<p>9331 6700 0000</p>
		<p>Fastening element</p>	<p>9332 0300 0000</p>
		<p>WireLane bracket usable from 150 mm profile length</p>	<p>9331 6720 0000</p>
<p><b>Double Sided Strip for Dock Square</b></p> <p>2x Double Sided Strips Removable without residue.</p>			<p>9332 1050 0000</p>
<p><b>Rubber gasket</b></p> <p>fits under the collar of the Port.</p>			<p>1599 0903 9100</p>

Description	Picture	Specifications	Order Number
<p><b>Laptop Secure</b></p> <p>Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.</p>		<p>Die-cast, silver-colored                      Length: 41 mm                      Breite: 9 mm                      Höhe: 22 mm</p>	<p>9331 3140 0000</p>
<p><b>Laptop Secure</b></p> <p>Sturdy attachment loop for standard laptop theft protection Such as Kensington Lock.</p>		<p>Silver-colored</p>	<p>9331 6030 0000</p>
<p><b>Hole Saw</b></p> <p>For precise installation.</p>		<p>Mounting hole Ø 102 mm (for Port)</p> <p>Mounting hole Ø 83 mm (for Square80)</p> <p>Mounting hole Ø 54 mm (for One)</p>	<p>1599 0901 7000</p> <p>1599 0910 1000</p> <p>1599 0911 3900</p>
<p><b>Unlocking Tool for interchangeable modules</b></p>			<p>6599 0911 1300</p>

Description	Picture	Specifications	Order Number
<p><b>Sample display</b></p> <p>Fully functional; equipped with Backflip, Circle80 with Circle80 DisQ, Circle80 Access, FlipTop Push S, FrameDock with FrameDock Hide, One, Square80, power supply unit and installation connector with Euro coupling; without connection cable; with carrying bag made of robust truck tarp incl. shoulder strap;</p>		<p>International sockets</p> <p>Bag separate, without display.</p> <p>Felt insert for bag, for carrying smaller displays or products.</p>	<p>7599 0911 6100</p> <p>7599 0911 6900</p> <p>7599 0911 8100</p>
<p><b>Sample display One</b></p> <p>Sample display for installation demonstration.</p> <p>With 3 One sockets: surface-mounted, flush-mounted, with cover.</p>		<p>VDE</p> <p>UK</p> <p>B/F</p> <p>CH 10 A</p>	<p>7599 0911 6300</p> <p>7599 0911 6400</p> <p>7599 0911 6500</p> <p>7599 0911 6600</p>
<p><b>Sample display OneDisQ</b></p>			<p>7599 0913 3700</p>
<p><b>Sample display One Upholstery installation</b></p> <p>Sample display for installation demonstration of the One in an upholstered piece of furniture.</p>		<p>Flat upholstery</p> <p>High upholstery</p>	<p>7599 0911 7900</p> <p>7599 0911 8000</p>

Description	Picture	Specifications	Order Number
<p><b>Sample display Backflip</b></p> <p>Sample display for the surface-mounted and flush-fitting demonstration of the backflip and the plug cabling on the back. Can be set up, fits in a felt insert and sample bag.</p>		<p>VDE</p> <p>B/F</p> <p>CH-10 A</p> <p>UK</p>	<p>7599 0912 2400</p> <p>7599 0912 2500</p> <p>7599 0912 2600</p> <p>7599 0912 2700</p>
<p><b>Sample folder surfaces</b></p> <p>Surface samples for profiles, Backflip and FlipTop Push.</p>			<p>1599 0913 3800</p>

# EVOLine®

## Schulte - Elektrotechnik GmbH & Co. KG

Jüngerstraße 21  
D-58515 Lüdenscheid

Telefon | *phone* +49 23 51 / 94 81-0  
Telefax | *fax* +49 23 51 / 4 26 58

E-Mail | *mail* info@schulte.com

Deutsch *english*



[www.evoline.com](http://www.evoline.com)

Stand: 03/2025  
Technische Änderungen und Druckfehler vorbehalten. | Abbildungen ähnlich.  
Issued: 03/2025  
Subject to technical changes and printing errors | Illustrations similar.